2198224-1 - ACTIVE

TE Internal #: 2198224-1 SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 16 Gb/s, Elastomeric Gasket, SFP+ Enhanced, Not Optional, 1 x 2, Through Hole - Press-Fit, 2 Port

View on TE.com >



Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+



Pluggable I/O Product Type: Cage Assembly Data Rate (Max): 16 Gb/s EMI Containment Feature Type: Elastomeric Gasket Pluggable I/O Applications: SFP+ Enhanced

Lightpipe Options: Not Optional

Features

Product Type Features

Form Factor	SFP+
Cage Туре	Ganged
Thermal Accessory Type Included	Heat Sink
Pluggable I/O Product Type	Cage Assembly

Lightpipe Options	Not Optional
Connector System	Cable-to-Board
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Port Matrix Configuration	1 x 2
Number of Ports	2
Electrical Characteristics	
Data Rate (Max)	16 Gb/s
Body Features	
Heat Sink Height Class	PCI
Heat Sink Height	4.2 mm[.165 in]
Heat Sink Style	Pin
Termination Features	

C For support call+1 800 522 6752

SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 16 Gb/s, Elastomeric Gasket, SFP+ Enhanced, Not Optional, 1 x 2, Through Hole - Press-Fit, 2 Port



Termination Post & Tail Length	2.05 mm[.081 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Heat Sink Compatible	Yes
For Use With Pluggable I/O Products	SFP+ SMT Connector
Pluggable I/O Applications	SFP+ Enhanced
Circuit Application	Signal
Packaging Features	

Packaging Method

Box & Tray, Tray

Other

EMI Containment Feature Type

Elastomeric Gasket

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 16 Gb/s, Elastomeric Gasket, SFP+ Enhanced, Not Optional, 1 x 2, Through Hole - Press-Fit, 2 Port



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

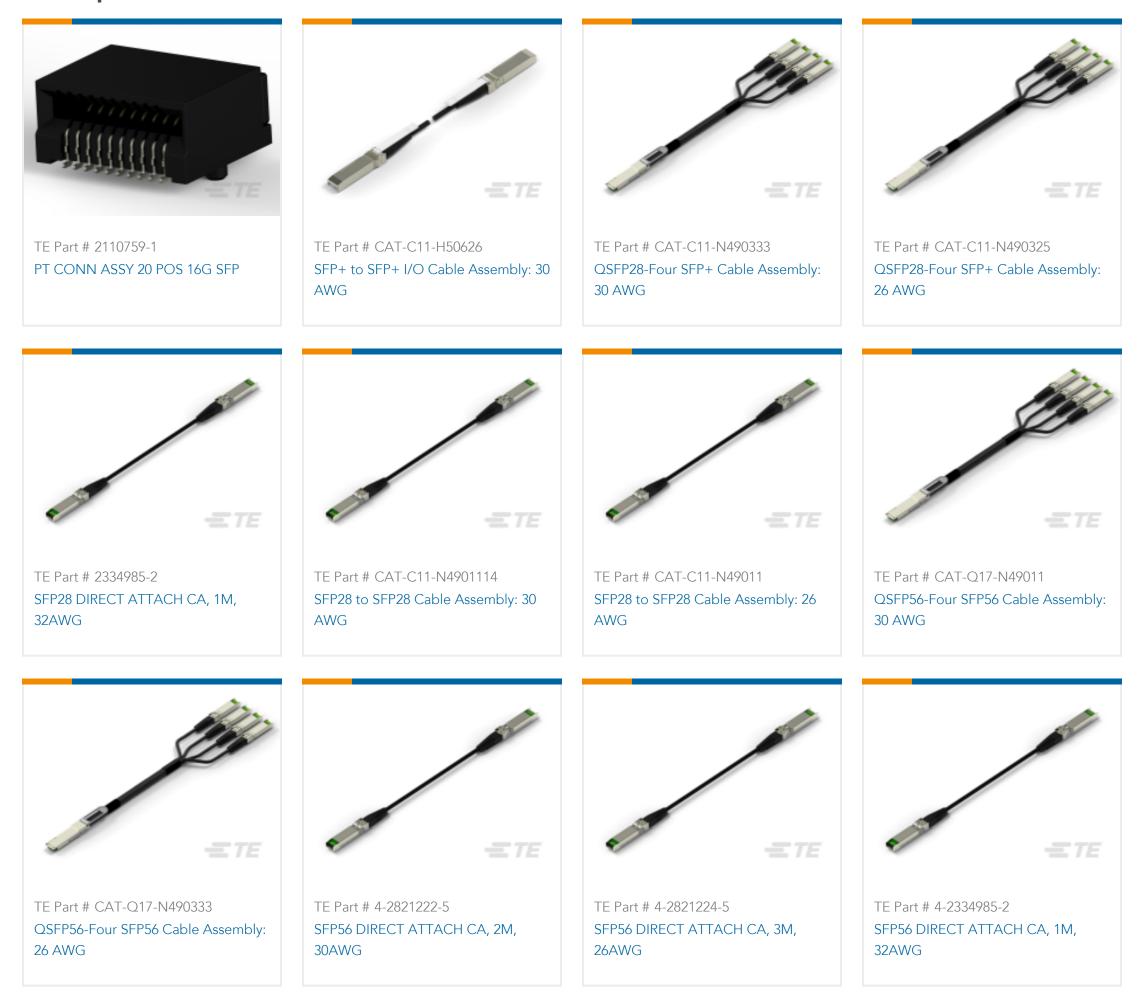


SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 16 Gb/s, Elastomeric Gasket, SFP+ Enhanced, Not Optional, 1 x 2, Through Hole - Press-Fit, 2 Port



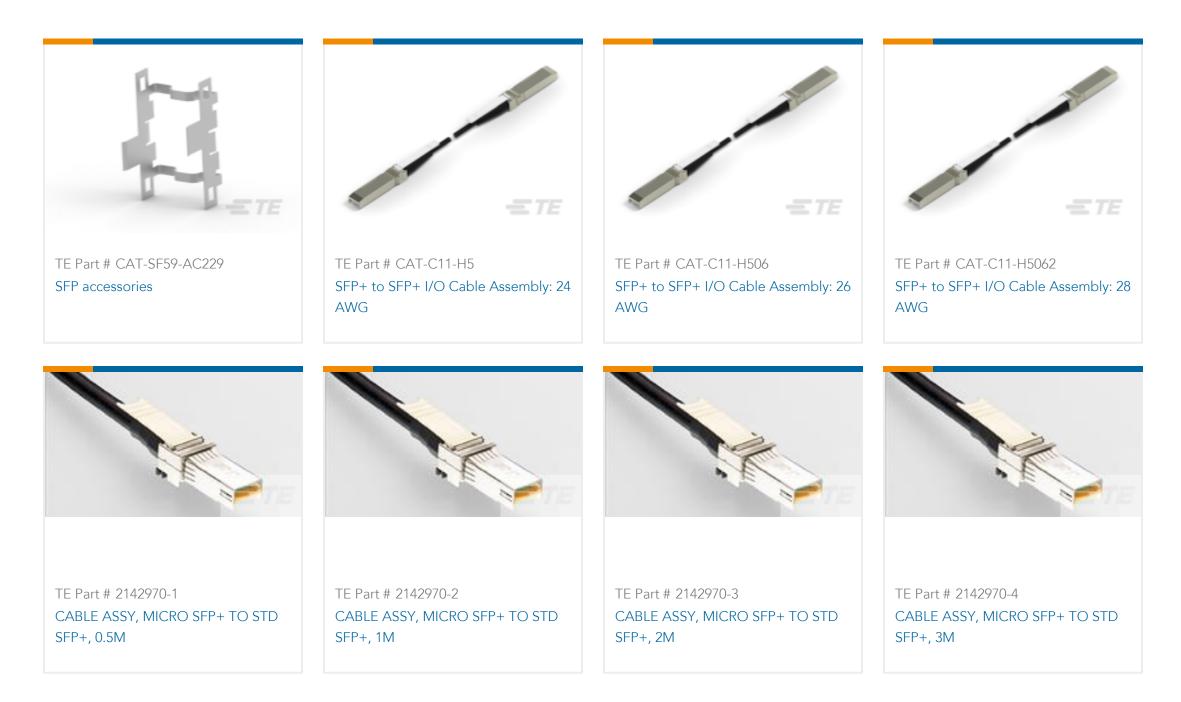

Customers Also Bought

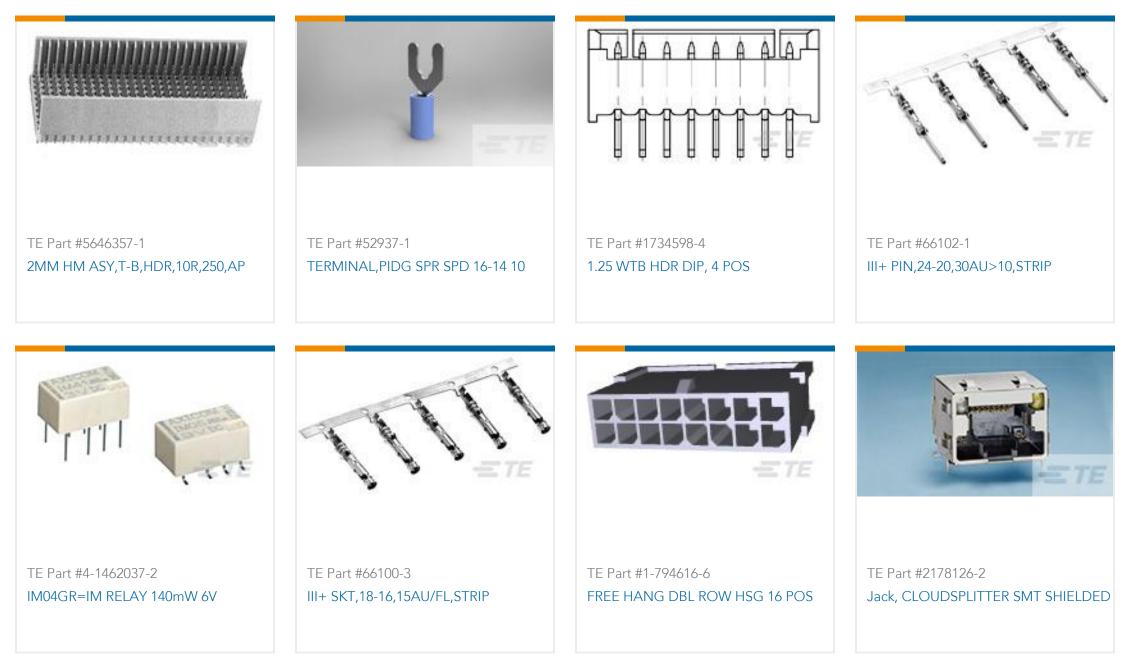

Documents

Product Drawings SFP+ Enhanced 1x2, PCI Heatsink

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2198224-1_A.2d_dxf.zip

SFP, SFP+ & zSFP+, Cage Assembly, Data Rate (Max) 16 Gb/s, Elastomeric Gasket, SFP+ Enhanced, Not Optional, 1 x 2, Through Hole - Press-Fit, 2 Port



English

Customer View Model ENG_CVM_CVM_2198224-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2198224-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Specification

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English