
1-532447-2 - ACTIVE

AMP-HDI

TE Internal #: 1-532447-2 PCB Mount Header, Vertical, Board-to-Board, 225 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Signal, Black

View on TE.com >



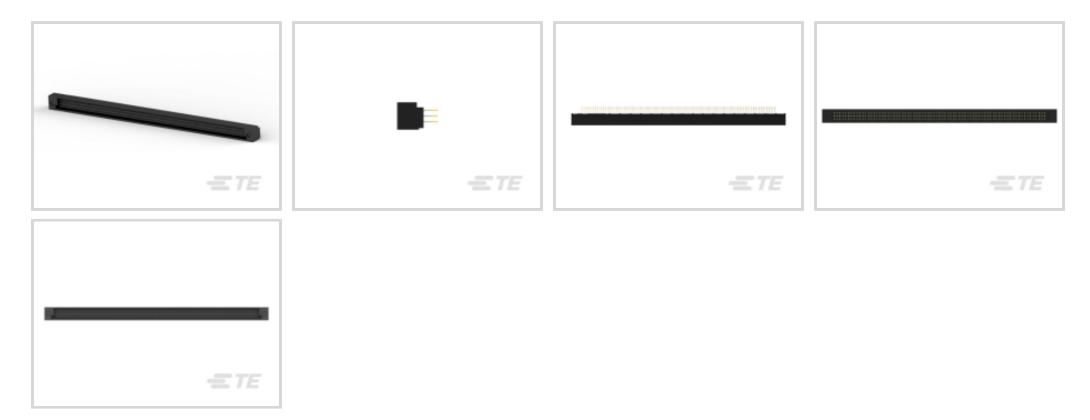

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 225

Number of Rows: 3

Features

E

Product Type Features

PCB Connector Assembly Type	PCB Mount Header	
Connector System	Board-to-Board	
Header Type	Fully Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Stackable	No	
PCB Mount Orientation	Vertical	
Number of Positions	225	
Number of Rows	3	
Electrical Characteristics		
Insulation Resistance	3 ΜΩ	
Body Features		
Primary Product Color	Black	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 225 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Signal, Black



Contact Features

Contact Layout	Matrix	
	.21 in	
Mating Square Post Dimension	.64 mm[.025 in]	
Contact Shape & Form	Four Beam	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Phosphor Bronze	
Contact Mating Area Plating Material	Gold	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]	
Contact Type	Pin	
Contact Current Rating (Max)	3 A	
	3 A	
Termination Features	3 A	
	3 A .64 mm[.025 in]	
Termination Features		
Termination Features Square Termination Post & Tail Dimension	.64 mm[.025 in]	
Termination Features Square Termination Post & Tail Dimension Termination Post & Tail Length	.64 mm[.025 in] 6.35 mm[.25 in]	

Mating Alignment	Without	
Mating Alignment Type	Keyed	
PCB Mount Retention	With	
PCB Mount Alignment	Without	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	2.54 mm[.1 in]	
Housing Material	Thermoplastic	
Dimensions		
Connector Height	11.73 mm[.462 in]	
PCB Thickness (Recommended)	2.13 mm[.76 in]	
Usage Conditions		
Housing Temperature Rating	High	
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]	
Operation/Application		

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 225 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Signal, Black



Solder Process Feature	Board Standoff
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	2
Packaging Type	Tube
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

Halogen Content

Solder Process Capability

Alticle Jale Usage Statements.

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Board-to-Board, 225 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Signal, Black



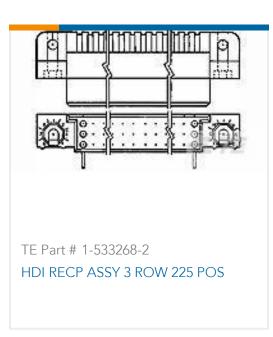

Customers Also Bought



RECP	A221	

Documents

Product Drawings HDI PIN ASSY 3 ROW 225 POS

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-532447-2_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-532447-2_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-532447-2_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

C For support call+1 800 522 6752

11/22/2022 03:08AM | Page 4

PCB Mount Header, Vertical, Board-to-Board, 225 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Press-Fit, Signal, Black



Datasheets & Catalog Pages

1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English