


NOTES (1-8)

- 1) HOUSING MATERIAL: GLASS REINFORCED BLACK NYLON
- 2) TOOL WEIGHT: 16.7 OZ (473G).
- 3) INSTALLS TYTON TIES T18-T80.
- 4) TOOL REQUIRES NO SPECIAL OPERATOR MAINTENANCE.
- 5) FOR REPLACEMENT BLADE ORDER PART # MK7-449
- 6) SAFETY GLASSES REQUIRED TO BE WORN AT ALL TIMES.
- 7) AIR PRESSURE: 90 PSI (6 BAR) MAX.
- 8) AIR CYLINDER MK7P-246 IS FACTORY LUBRICATED.

NOTES (9-12)

- 9) USE NON-LUBRICATED AIR ONLY.
- 10) MINATURE..... = T18 TIES (.09" WIDE)
INTERMEDIATE = T30, T40 TIES (.14" WIDE)
STANDARD..... = T50, T80 TIES (.18" WIDE)
- 11) TO LOCK THE FA KNOB, REMOVE THE SCREW FROM "UNLOCK" POSITION AND PLACE IN THE "LOCK" POSITION.
- 12) TO LOCK THE CAM KNOB, TIGHTEN THE SET SCREW UNTIL SNUG (DO NOT OVER TIGHTEN).

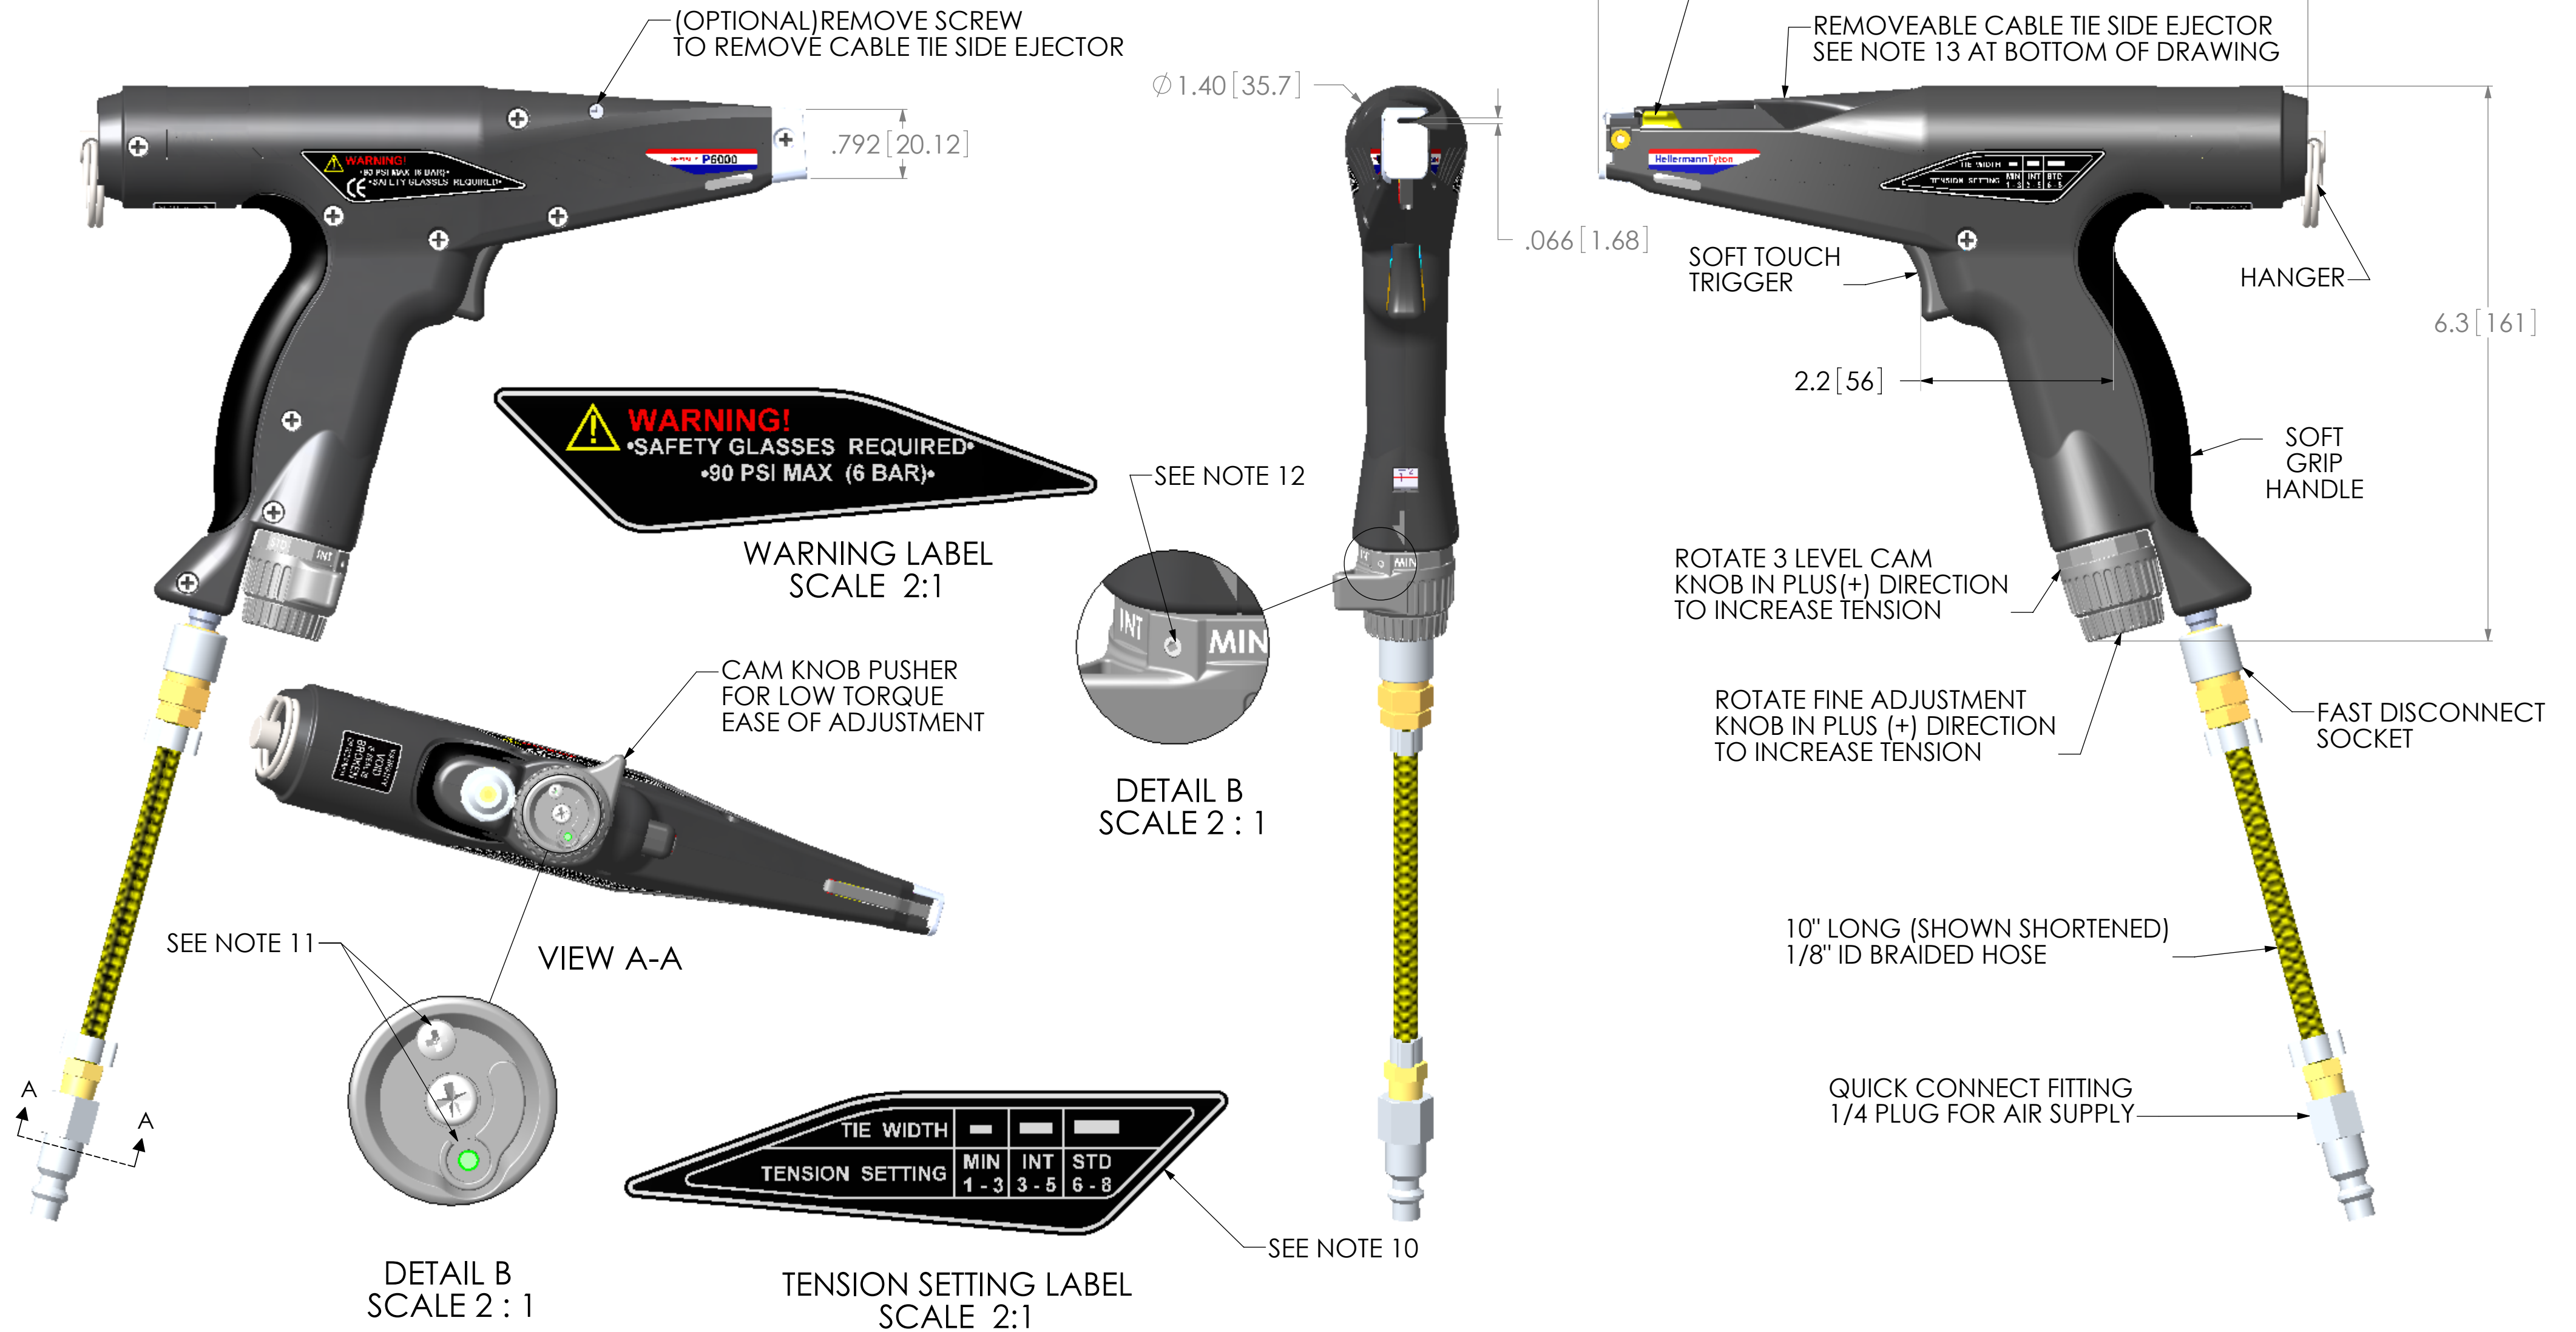

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state

NOTES

NOTES CONTINUED:
13) RECOMMEND USING THE CABLE TIE SIDE EJECTOR TO EJECT OR DEFLECT THE CUTOFF PORTION OF THE TIE AWAY FROM THE FACE OF THE OPERATOR.

REVISION

DR level	03
AW by	WKL
IN date	2/19/2016
NG ECN #	300229
part level	-

TOLERANCES

.XXXX = ±.0005
.XXX = ±.005
.XX = ±.01
.X = ±.03
∠ = ±0.5°
unless otherwise specified

units inches

PART

number	110-07101	phase	Production
name	CUSTOMER DRAWING MK7P		
material			

DRAWING

format	version	N	CAD	SW	2014	scale	3:4
computer file name	TS2087240CST_03			previous drawing number			
drawn	CMK	checked	WKL	approved			
date	05/06/1999	checked	03/28/2005	approved			
type	Customer	sheet		1 of 1			
number	TS2087240CST						