

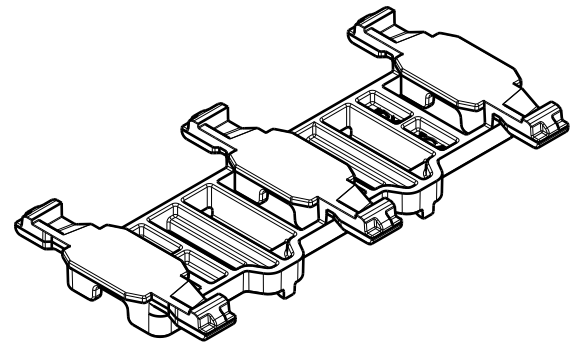


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.1	Design Release	-	SEE ECN# 015492	NHK	10/21/19	HDC	10/21/19

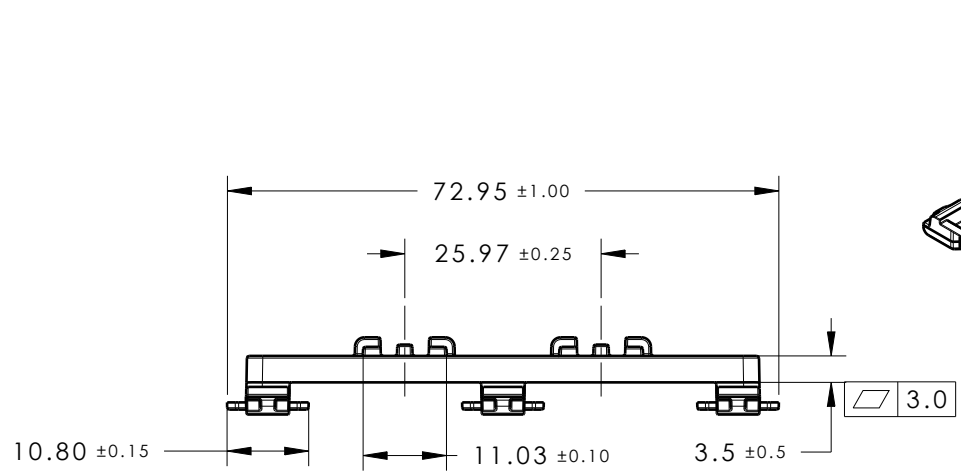

ISOMETRIC VIEW

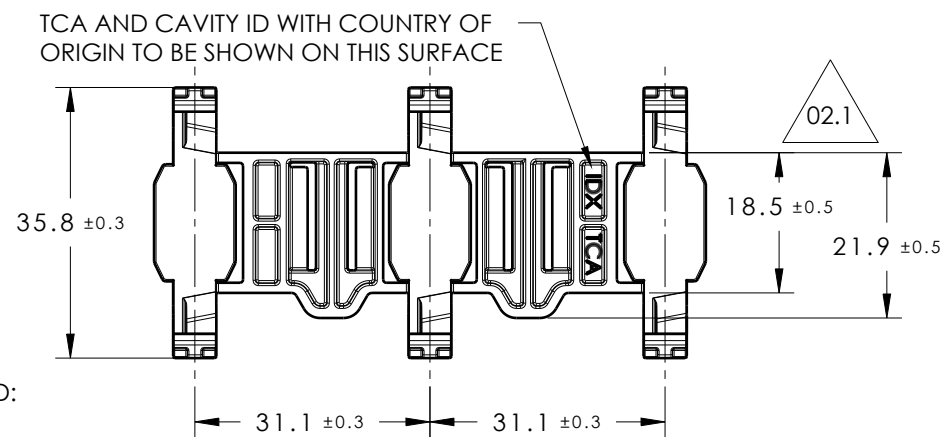

- REFERENCE:  
 PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. DESIGNED TO MEET PUSH ON/PULL OFF FORCES OF SAE/USCAR-2
  2. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
  3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
  4. MAX ALLOWABLE FLASH TO BE: 0.5mm
  5. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
TRIPLE11CCBRKT-POM-NA	POM	NATURAL

Material  COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	NHK	07/24/18	Article/Type-No	TRIPLE11CCBRKT	Scale	1:1			
	Tolerance defined on each dimension	Approved		EJF	07/24/18	Title	TRIPLE 11mmCC INLINE BRACKET WITH 11mmCC SLOT		Project Number	18-1949			
				 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION		Phase	Format	AH	
							18-1949-001-CSU	02.1		Sheet	1/1		