



Revision level		Revision Record	Changed	Date	Approved	Date
part	drawing					
—	01					

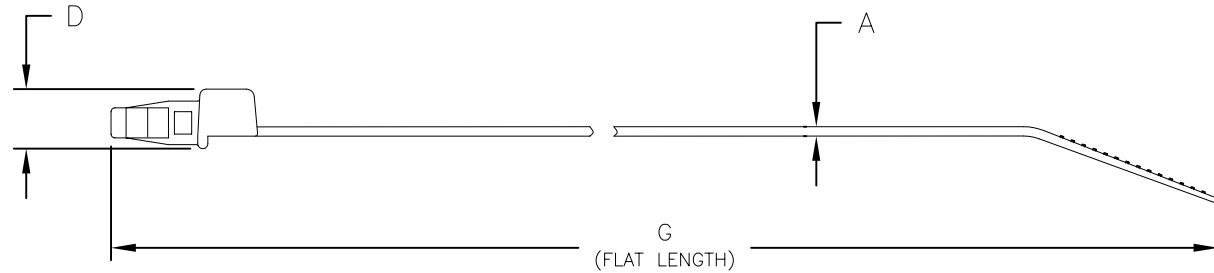

PRODUCT CODE DESCRIPTION

T50SSF_HS
 COLOR
 (CONSULT FACTORY FOR AVAILABLE COLORS)

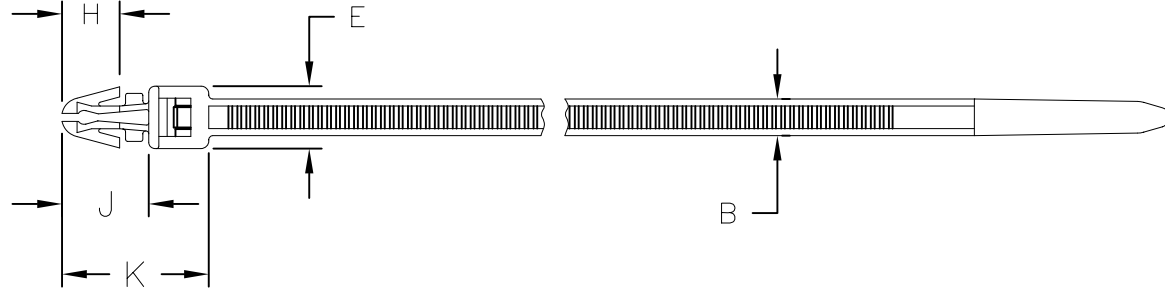

PUSH IN = 36 MAX
 PULL OUT = 225 MIN

Mount Specifications
 (newtons)

HOLE DIA: 6.35 TO 7.11
 MAX THICKNESS: 3.56

Panel Specifications

SEE CHART

Material

Dimension tolerances
 unless otherwise specified


.XXX =
 .XXX =
 .XX =
 .X = NOTED
 < =

Dimension Units mm

PERFORMANCE
 SPECIFICATION

Product Code	Cable Range (mm)	Material	A	B	D	E	G	H	J	K	Min Loop Tensile Strength (newtons)
T50SSF_	1.5 to 35	PA66	1.3 ±0.2	4.7±0.2	7.5 ±0.5	7.8 ±0.5	159.0 ±10.0	7.2 ±0.5	11.2 ±0.5	17.9 ±0.5	225
T50SSF_HIR		PA66HIR									
T50SSF_HS		PA66HS									
T50SSF_IMHSUV		PA66IMHSUV									

ACAD MECH
 2005



Drawn

A.A.C.

05/10/05

Approved

K.A.C.

05/11/05

Scale

1:1

Title

Computer File Number
 CT\CST\2050049_01

Phase: Pre-Production

ALL PROPRIETARY RIGHTS IN THE
 SUBJECT MATTER SHOWN ON THIS
 DRAWING ARE EXCLUSIVE
 PROPERTY OF HELLERMANN TYTON

HellermannTyton®

7930 N. Faulkner Rd.
 Milwaukee, WI 53224
 Ph: (414) 355-1130
 Fx: (414) 362-8338

**T50SSF
 PUSH MOUNT TIE**

Drawing-No

CT2050049CST

Format

AH

Sheet 1 of 1