# 2007194-2 - ACTIVE

TE Internal #: 2007194-2 SFP, SFP+ & zSFP+, Cage, Data Rate (Max) 16 Gb/s, External Springs, SFP+, Not Optional, 1 x 1, Through Hole - Solder, 1 Port, Cable-to-Board

#### View on TE.com >



Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+



## Pluggable I/O Product Type: Cage Data Rate (Max): 16 Gb/s

EMI Containment Feature Type: External Springs

Pluggable I/O Applications: SFP+

Lightpipe Options: Not Optional

## Features

## Product Type Features

Form Factor	SFP+
Cage Туре	Single
Pluggable I/O Product Type	Cage
Lightpipe Options	Not Optional

Connector System	Cable-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Port Matrix Configuration	1 x 1	
Number of Ports	1	
Electrical Characteristics		
Data Rate (Max)	16 Gb/s	
Contact Features		
Tail Plating Material	Tin	
Termination Features		
Termination Post & Tail Length	2.8 mm[.11 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		

**C** For support call+1 800 522 6752

SFP, SFP+ & zSFP+, Cage, Data Rate (Max) 16 Gb/s, External Springs, SFP+, Not Optional, 1 x 1, Through Hole - Solder, 1 Port, Cable-to-Board



Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Heat Sink Compatible	Yes
For Use With Pluggable I/O Products	SFP+ SMT Connector
Pluggable I/O Applications	SFP+
Packaging Features	
Packaging Method	Box & Tray, Tray
Other	
Pluggable I/O Connectors Comment	Meets requirements for PCI applications / Heat Sink Opening
EMI Containment Feature Type	External Springs

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Reflow solder capable to 260°C	
Product Compliance Disclaimer		


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

SFP, SFP+ & zSFP+, Cage, Data Rate (Max) 16 Gb/s, External Springs, SFP+, Not Optional, 1 x 1, Through Hole - Solder, 1 Port, Cable-to-Board



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

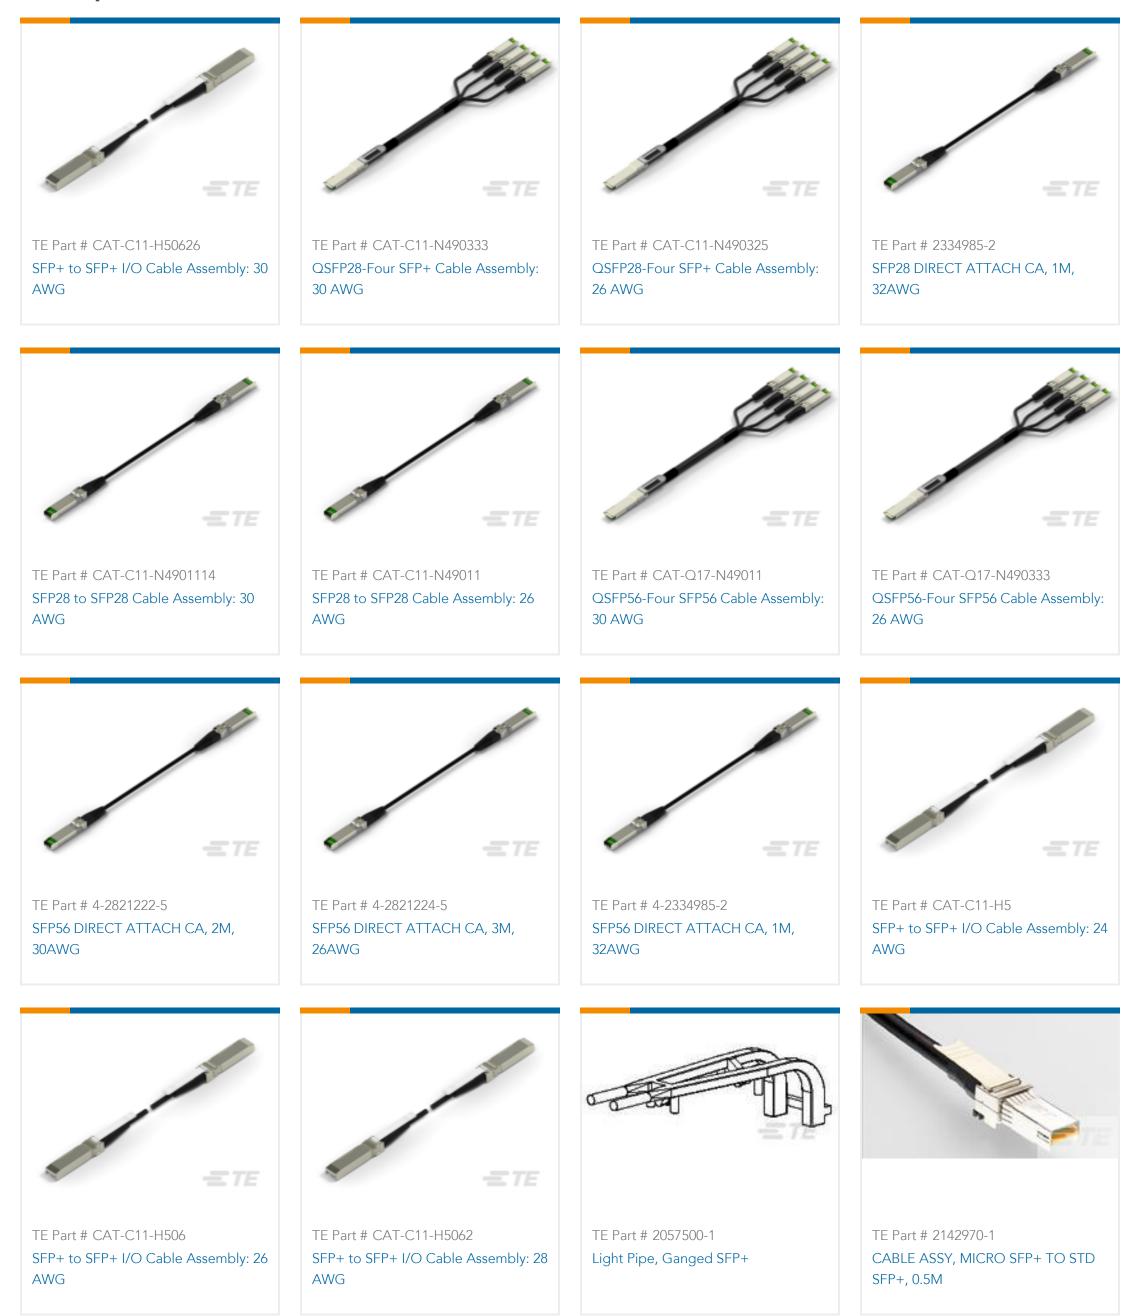

SFP, SFP+ & zSFP+, Cage, Data Rate (Max) 16 Gb/s, External Springs, SFP+, Not Optional, 1 x 1, Through Hole - Solder, 1 Port, Cable-to-Board





## **Customers Also Bought**



SFP+ 1x1 Cage Assembly, Press-	MJ,INV,1X1,6PNL G,.100"ST,SN	SFP+ 1x1 Cage Assembly, PCI, S
₩ E TE	TE	
TE Part #9-1879333-0 CPF0402 180K 0.1% 25PPM 5K RL	TE Part #2000713-5 RA Keyed Guide Mod, Vita 46, Machined	

## Documents

Product Drawings SFP+ 1x1 Cage Assembly, PCI, Solder Tail

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_2007194-2\_B.2d\_dxf.zip

English

3D PDF

zQSFP+ connector assembly

SFP, SFP+ & zSFP+, Cage, Data Rate (Max) 16 Gb/s, External Springs, SFP+, Not Optional, 1 x 1, Through Hole - Solder, 1 Port, Cable-to-Board



3D

Customer View Model ENG\_CVM\_CVM\_2007194-2\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2007194-2\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English

**Application Specification** 

English

Product Environmental Compliance MD\_2007194-2\_091820171137\_dmtec

English

MD\_2007194-2\_091820171137\_dmtec

English