


| | | | | | | |
|----------------|---------|-----------------|---------|------|----------|------|
| Revision level | | Revision Record | Changed | Date | Approved | Date |
| part | drawing | | | | | |
| — | 07 | | | | | |

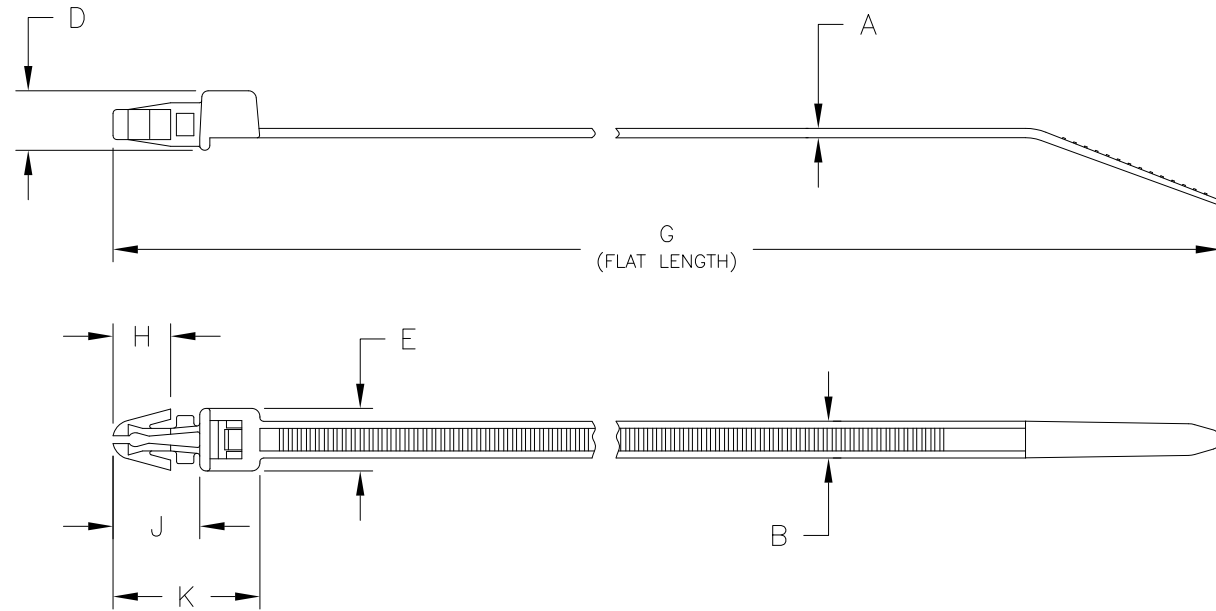

HOLE DIA: 6.35 TO 7.11
MAX THICKNESS: 3.56

Panel Specifications

SEE CHART
(CONSULT FACTORY FOR
AVAILABLE COLORS)

Material

Dimension tolerances
unless otherwise specified
.XXX =
.XXX =
.XX =
.X = NOTED
∠ =

Dimension Units mm

PERFORMANCE
SPECIFICATION

| Type | Cable Range (mm) | Material | A | B | D | E | G | H | J | K | Min Loop Tensile Strength (newtons) |
|--------|------------------|-------------|----------|---------|----------|----------|-------------|----------|-----------|-----------|-------------------------------------|
| T50RSF | 1.6 to 44.5 | PA66 | 1.3 ±0.2 | 4.7±0.2 | 7.5 ±0.5 | 7.8 ±0.5 | 210.0 ±10.0 | 7.2 ±0.5 | 11.2 ±0.5 | 17.9 ±0.5 | 225 |
| | | PA66HIR | | | | | | | | | |
| | | PA66HS | | | | | | | | | |
| | | PA66UV | | | | | | | | | |
| | | PA66HIRHSUV | | | | | | | | | |

| | | | | | | | | | | |
|-----------------------------------------------------------------------------------------------------------------------|--|------------------------|--------|----------|----------------------------------|--------------|--|-------------------------------------------|--|--|
| ACAD MECH 2013 | | Drawn | G.G.G. | 02/09/94 | Scale | 1:1 | | Computer File Number CT\CST\2050021_07 | | |
| | | Approved | K.A.C. | 12/06/13 | Title | | | | | |
| ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON | | HellermannTyton | | | T50RSF PUSH MOUNT TIE | | | | | |
| | | | | | | | | | | |
| | | | | | Drawing-No | | | CT2050021CST | | |
| | | | | | | Sheet 1 of 1 | | | | |