REFERENCE:
PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.0mm
4. APPLICABLE OVAL HOLE SIZES:
   - A. 6.2 X 12.2mm
   - B. 6.5 x 12.5mm
   - C. 6.5 x 13.0mm
   - D. 7.0 x 12.0mm
5. Meets USCAR Clip Slot Specification EWCAP-005-7



Isometric view
Scale: 1:1

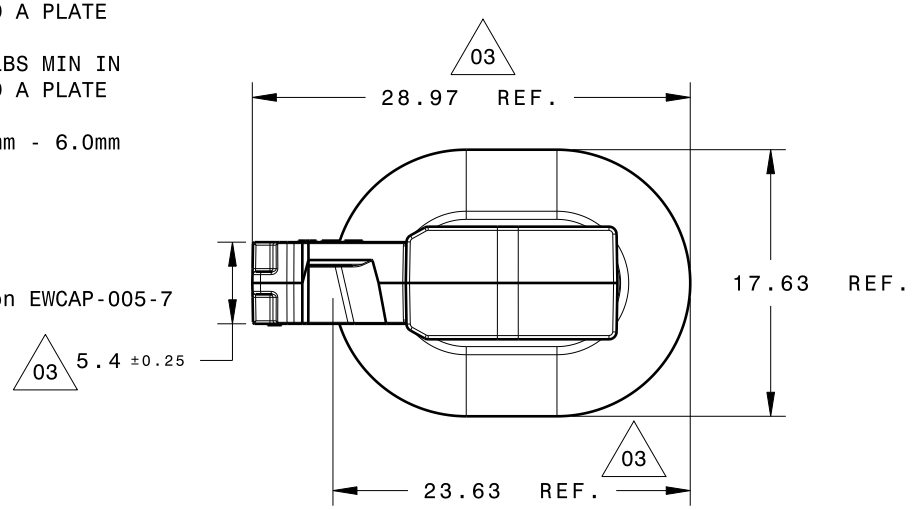

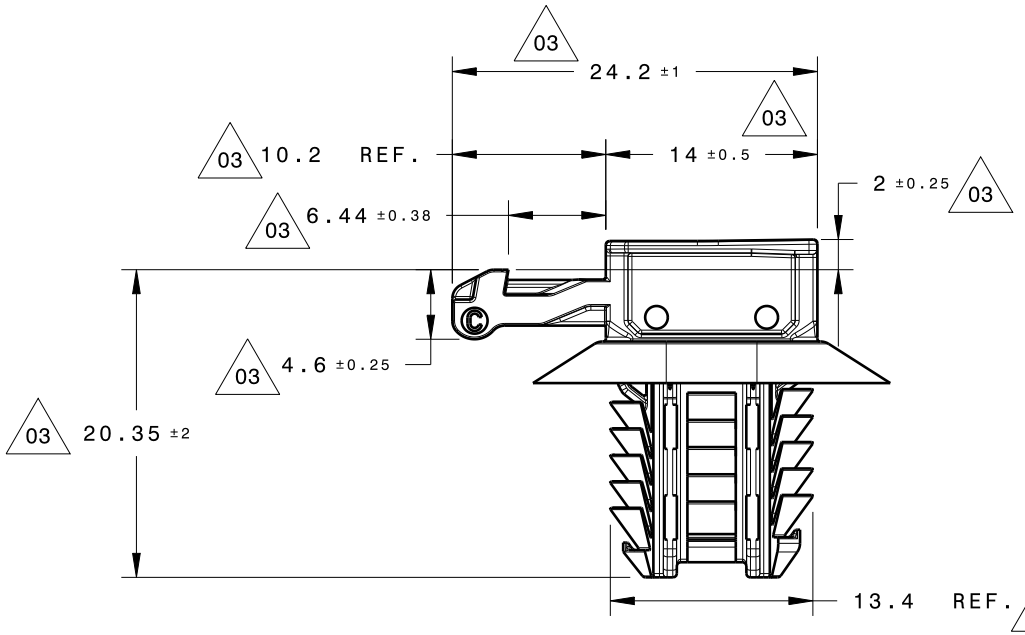

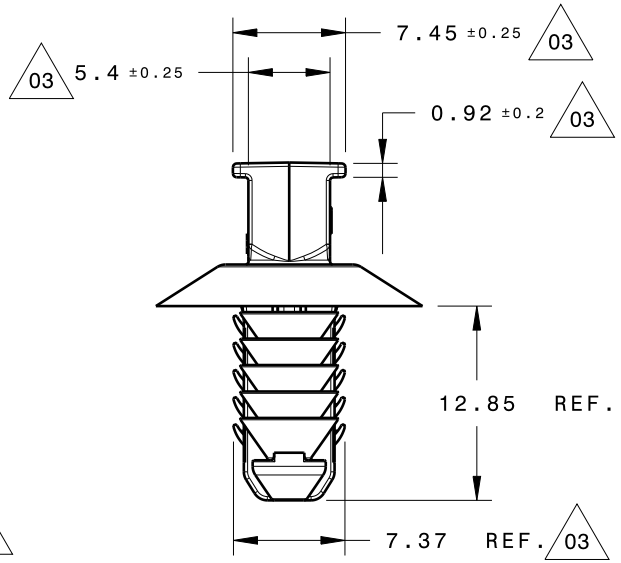

INVENTORS

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON

name	date	city, state
S. ADAMS	10/7/11	MENOMONEE FALLS, WI.

REVISIONS

DRAWING

level 03
by KVH
date 11/12/12
ECN # 012223
part level C

DIMENSIONS

TOLERANCES
.XXXX = ± 0.25
.XXX = ± 0.50
.XX = ± 1.00
.X = ± 2.00
∠ = ± 1.00
unless otherwise specified

units millimeters

PART

number CCOVAL2 phase PRODUCTION
name OVAL HOLE CONNECTOR CLIP #2
material PA66HIRHS
COLOR: BLACK

DRAWING

FORMAT AH VERSION J CAD CATIA V5 SCALE 2:1
A- SIZE (landscape)_N01 previous drawing number
drawn S. ADAMS 10/7/11 checked P. TRAUTFIELD 10/8/11 approved
type CUSTOMER sheet 1 of 1
number 11-0737-001-CSU