
2149157-3 <

TE Internal #: 2149157-3 CXP, Receptacle Assembly, Single-Sided Mount, 1 Port, 1 x 1, Data Rate (Max) 125 Gb/s, Elastomeric Gasket, Cable-to-Board, 84 Position

View on TE.com >

Connectors > Pluggable IO Connectors & Cages > CXP > CXP Receptacle Kits

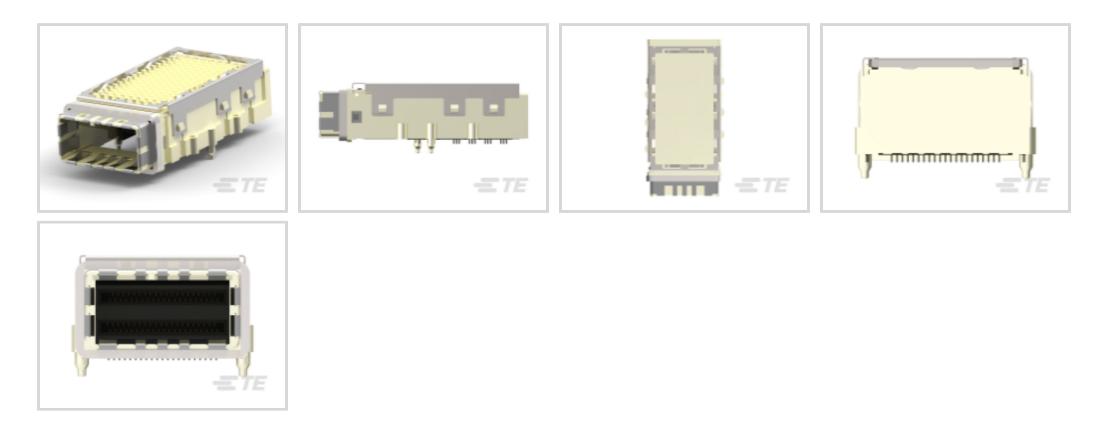

Pluggable I/O Product Type: Receptacle Assembly

PCB Mounting Style: Single-Sided

Number of Ports: 1

Port Matrix Configuration: 1 x 1

Included Lightpipe: No

All CXP Receptacle Kits (15)



Features

Product Type Features

Form Factor	CXP
Connector & Housing Type	Receptacle
Cage Type	Single
Pluggable I/O Product Type	Receptacle Assembly
Connector System	Cable-to-Board
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Ports	1
Port Matrix Configuration	1 × 1
Number of Positions	84
Electrical Characteristics	
Data Rate (Max)	125 Gb/s

CXP, Receptacle Assembly, Single-Sided Mount, 1 Port, 1 x 1, Data Rate (Max) 125 Gb /s, Elastomeric Gasket, Cable-to-Board, 84 Position



Body Features

Dimensions

Primary Product Plating Material	Tin over Nickel
Cage Plating Material	Tin over Nickel
Contact Features	
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	.5 A
Termination Features	
Bezel Mounting Style	Through Bezel
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
PCB Mounting Style	Single-Sided
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	.03 mm[.8 in]

Connector Profile Height	16.5 mm[.65 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-40-85 °C[-40-185 °F]
Operation/Application	
For Use With Pluggable I/O Products	CXP Cable Assembly
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray, Tray
Other	
Included Lightpipe	No
	110

CXP, Receptacle Assembly, Single-Sided Mount, 1 Port, 1 x 1, Data Rate (Max) 125 Gb /s, Elastomeric Gasket, Cable-to-Board, 84 Position



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts



Customers Also Bought

CXP, Receptacle Assembly, Single-Sided Mount, 1 Port, 1 x 1, Data Rate (Max) 125 Gb /s, Elastomeric Gasket, Cable-to-Board, 84 Position



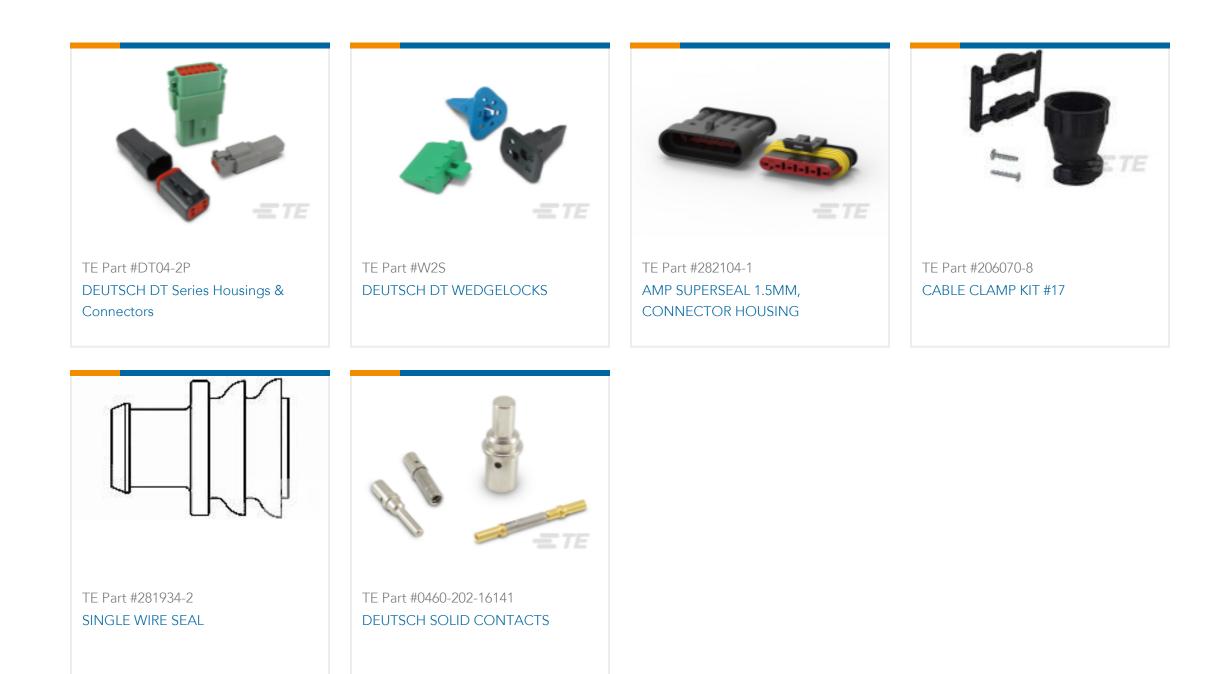

Documents

Product Drawings CXP RCPT KIT W/HEAT SINK

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_2149157-3_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2149157-3_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2149157-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 3-1773462-5_CXP_PLUGGABLE_IO_INTERCONNECT

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

S For support call+1 800 522 6752

CXP, Receptacle Assembly, Single-Sided Mount, 1 Port, 1 x 1, Data Rate (Max) 125 Gb /s, Elastomeric Gasket, Cable-to-Board, 84 Position



English

Instruction Sheet (U.S.)

English