

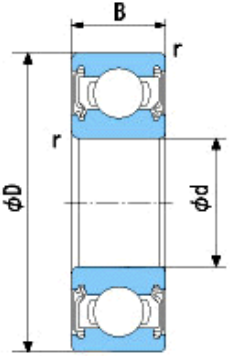
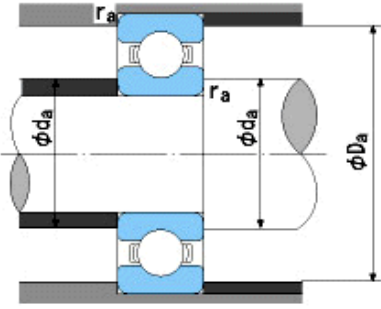
[TopPage](#)>>[Search Result](#)>>6010-2NSE9

Deep-groove Ball Bearings

Bearing No. : **NACHI 6010-2NSE9**

Bearing Type
Clearance
Tolerance Class

(0.006~0.023)

<p>Dimensions</p> <p>d = 50 ⁰_{-0.012}</p> <p>D = 80 ⁰_{-0.013}</p> <p>B = 16 ⁰_{-0.120}</p> <p>r = 1~1.5 (Radial Direction)</p> <p>r = 1~3 (Axial Direction)</p>			<p>Dimensions</p> <p>da(min) = 55</p> <p>Da(max) = 75</p> <p>ra(max) = 1</p> <p>Mass = 0.264 kg</p>
--	---	--	---

<p>Basic Dynamic Load Rating Cr : 21,800 N</p> <p>Basic Static Load Rating Cor : 16,600 N</p> <p>Limiting Speed ;</p> <p>Grease Lubrication : 5,000 min⁻¹</p> <p>Oil Lubrication : - min⁻¹</p>	<table border="0"> <thead> <tr> <th></th> <th>INNER RING</th> <th>OUTER RING</th> </tr> </thead> <tbody> <tr> <td>O.D.Surface Runout with Side :</td> <td></td> <td>-</td> </tr> <tr> <td>Axial Runout with Bore :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Axial Runout with Raceway :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Width Variation :</td> <td>0.020</td> <td>0.020</td> </tr> <tr> <td>Radial Runout :</td> <td>0.015</td> <td>0.025</td> </tr> </tbody> </table>		INNER RING	OUTER RING	O.D.Surface Runout with Side :		-	Axial Runout with Bore :	-	-	Axial Runout with Raceway :	-	-	Width Variation :	0.020	0.020	Radial Runout :	0.015	0.025
	INNER RING	OUTER RING																	
O.D.Surface Runout with Side :		-																	
Axial Runout with Bore :	-	-																	
Axial Runout with Raceway :	-	-																	
Width Variation :	0.020	0.020																	
Radial Runout :	0.015	0.025																	