

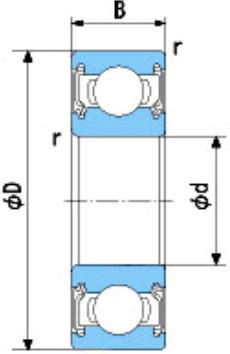
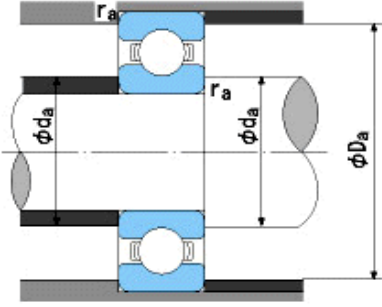
[TopPage](#)>>[Search Result](#)>>6002-2NSE9

Deep-groove Ball Bearings

Bearing No. : **NACHI 6002-2NSE9**

Bearing Type
Clearance
Tolerance Class

 (0.003~0.018)

<p>Dimensions</p> <p>d = 15 ⁰_{-0.008}</p> <p>D = 32 ⁰_{-0.011}</p> <p>B = 9 ⁰_{-0.120}</p> <p>r = 0.3~0.6 (Radial Direction)</p> <p>r = 0.3~1 (Axial Direction)</p>			<p>Dimensions</p> <p>da(min) = 17</p> <p>Da(max) = 30</p> <p>ra(max) = 0.3</p> <p>Mass = 0.032 kg</p>
---	---	--	---

<p>Basic Dynamic Load Rating Cr : 5,600 N</p> <p>Basic Static Load Rating Cor : 2,840 N</p> <p>Limiting Speed ;</p> <p>Grease Lubrication : 15,000 min⁻¹</p> <p>Oil Lubrication : - min⁻¹</p>	<table border="0"> <thead> <tr> <th></th> <th>INNER RING</th> <th>OUTER RING</th> </tr> </thead> <tbody> <tr> <td>O.D.Surface Runout with Side :</td> <td></td> <td>-</td> </tr> <tr> <td>Axial Runout with Bore :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Axial Runout with Raceway :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Width Variation :</td> <td>0.020</td> <td>0.020</td> </tr> <tr> <td>Radial Runout :</td> <td>0.010</td> <td>0.020</td> </tr> </tbody> </table>		INNER RING	OUTER RING	O.D.Surface Runout with Side :		-	Axial Runout with Bore :	-	-	Axial Runout with Raceway :	-	-	Width Variation :	0.020	0.020	Radial Runout :	0.010	0.020
	INNER RING	OUTER RING																	
O.D.Surface Runout with Side :		-																	
Axial Runout with Bore :	-	-																	
Axial Runout with Raceway :	-	-																	
Width Variation :	0.020	0.020																	
Radial Runout :	0.010	0.020																	