



DESCRIPTION: 97 SERIES SOLDER STYLE PANEL & CABLE MOUNT  
D-SUB CONNECTOR

MODEL NUMBER: 40-97XXS

APPLICATION: FOR CABLE

CRIMP TOOL: N/A



IMPEDANCE: N/A

FREQUENCY RANGE: 0-15 MHz

MATERIAL: HOUSING STEEL NICKEL PLATED  
INSULATOR PBT+FIBER-GLASS UL94-V0 WHITE  
CONTACT COPPER-ALLOY  
GOLD PLATED AT CONTACT AREA  
GOLD OR TIN PLATED AT SOLDER CUP AREA

RoHS COMPLIANCE: YES

TECHNICAL DETAIL: N/A

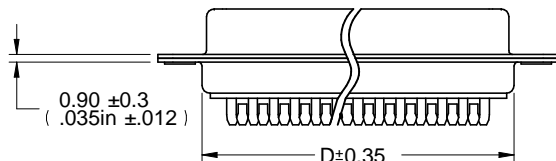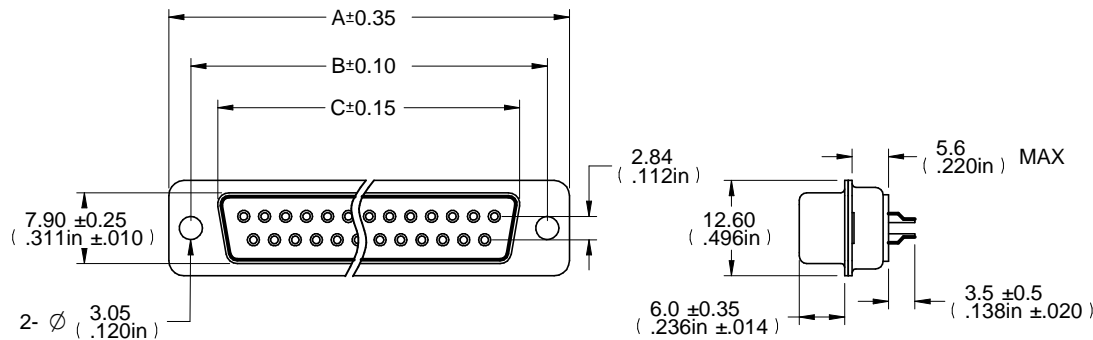

**DIM OUTLINE**

受控 CONTROLLED DOCUMENT				
编号 P/N	40-97XXS-CUST	版本 Rev	004	日期 Rel'd Date
				Sep9,13

MODEL NUMBER	PIN	A	B	C	D
40-9709S	09	30.80	24.99	16.30	19.20
40-9715S	15	39.15	33.32	24.65	27.70
40-9725S	25	53.00	47.04	38.40	41.10
40-9737S	37	69.30	63.50	54.80	57.30

<p>This PROPRIETARY Document is property of Emerson Network Power Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	3RD ANGLE PROJECTION		AIM-Cambridge		
	RoHS <input checked="" type="checkbox"/> 2002/95/EC		Title: D-Sub Connector, 97 Series, Solder Style Panel and Cable Mount, Female		
	UNLESS OTHERWISE SPECIFIED UNITS: METRIC .XX ±.51 .XXX ±.127 ANGLES ±2°		Model No. 40-97XXS		
	Size A	DO NOT SCALE DRAWING	Date: 9/9/2013	Sheet 1 of 1	