


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 11819; REVISE FEMALE TO PLUG AT SMA. ADDED CHART, REVISED FORMAT	04/27/2022	AGANWANI

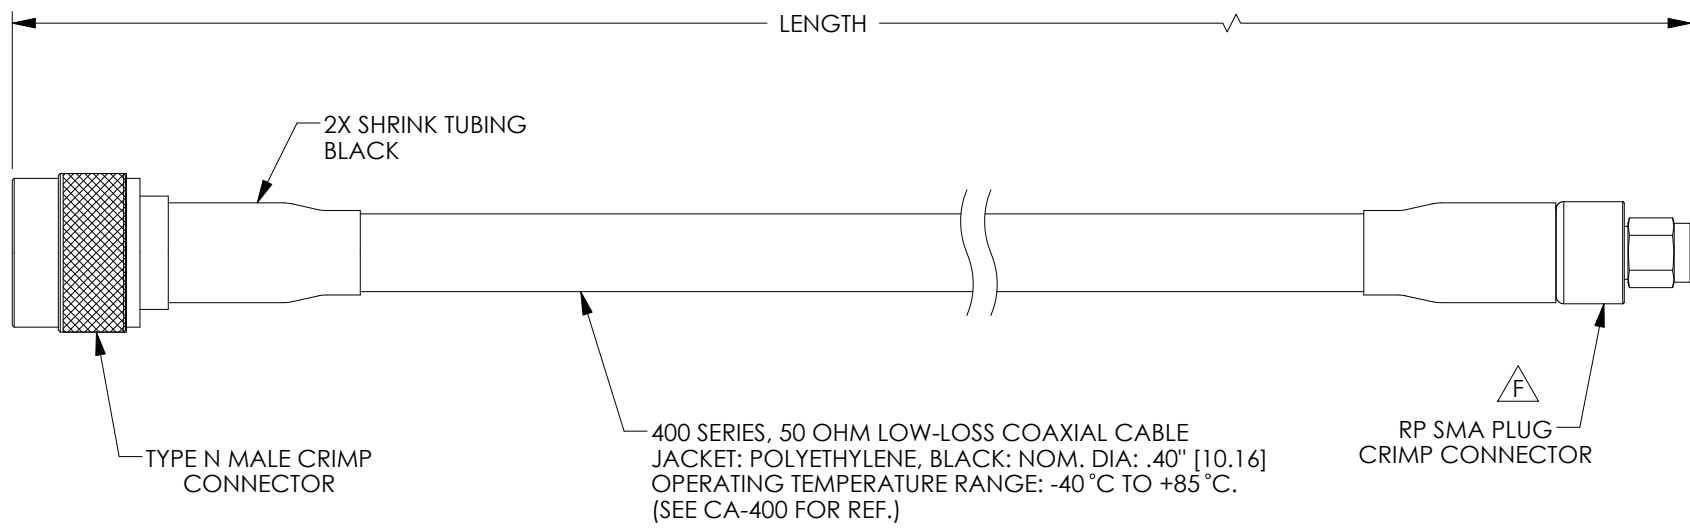

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA4NMRSFXXX	WHERE XXX = LENGTH IN FEET	CA4NMRSF010 (10 FEET)
CA4NMRSFNXX	WHERE NXX = LENGTH IN INCHES	CA4NMRSFN16 (16 INCHES)
CA4NMRSFMXX	WHERE MXX = LENGTH IN METERS	CA4NMRSFM07 (7 METERS)
CA4NMRSFXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA4NMRSF3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS ± 1/32 .XX = ± .02 [.5]      ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY BPUCHASKI CHECKED BY BPUCHASKI APPROVED BY Admin	DATE 12/09/2009 12/09/2009 12/09/2009	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY <b>COAXIAL</b>		PRODUCT DESCRIPTION <b>CA400 NM - RSP</b>
THIRD-ANGLE PROJECTION 	SIZE <b>A</b>	CAGE CODE <b>43321</b>	ITEM NO. <b>CA4NMRSF</b>	REV. <b>F</b>
SCALE: NONE		CAD FILE: CA4NMRSF.SLDDRW		SHEET 1 OF 1