

1) Tightening torque



### Basic features

<b>Approval/Conformity</b>	CE UKCA cULus WEEE
<b>Principle of operation</b>	Processor unit

### Electrical connection

<b>Connection (COM 1)</b>	X1 (Ethernet TCP/IP): M12x1-Female, 4-pin, D-coded
<b>Connection (COM 2)</b>	USB: M12x1-Female, 5-pin, A-coded
<b>Connection (IO-Link/Service)</b>	M12x1-Female, 5-pin, A-coded
<b>Connection (supply voltage IN)</b>	7/8"-Male, 5-pin
<b>Connection slots</b>	H1: M12x1-Female, 5-pin H2: M12x1-Female, 5-pin H3: M12x1-Female, 5-pin H4: M12x1-Female, 5-pin
<b>Connector port 01, note type</b>	for all VU/VM/VL-3... with connector, 4-pin

### Electrical data

<b>Current consumption typ. at 24 V DC</b>	150 mA
<b>IO-Link function</b>	Master (max. 1700 mA)
<b>Nominal voltage</b>	24 VDC
<b>Operating voltage <math>U_b</math></b>	24 V DC LPS Class 2
<b>Residual ripple max.</b>	1 %

### Environmental conditions

<b>Ambient temperature</b>	0...60 °C
<b>Continuous shock load</b>	yes
<b>EN 60068-2-27, Shock</b>	yes
<b>EN 60068-2-32 Free fall</b>	yes
<b>EN 60068-2-6, Vibration</b>	yes
<b>EN 61000-4-3 (1400...2000 MHz)</b>	Severity level 3A
<b>IP rating</b>	IP65, with connector

### Functional safety

<b>MTTF (40 °C)</b>	19 a
---------------------	------

**Multi-Frequency Processor**  
**BIS V-6107-039-C005**  
**Order Code: BIS0186**

**BALLUFF**

---

**Interface**

**Interface** Ethernet TCP/IP  
USB  
IO-Link

---

**Material**

**Housing material** Zinc, Die casting

---

**Mechanical data**

**Application weight** 800.00 g  
**Dimension** 48 x 62 x 172 mm


---

**Remarks**


When installing, the technical standards and regulations of the corresponding countries must be observed.  
Values are under rated conditions unless otherwise specified.  
Current consumption when 4 read/write heads and IO-Link device are connected to the IO-Link port max. 2 A  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


## Connector Drawings

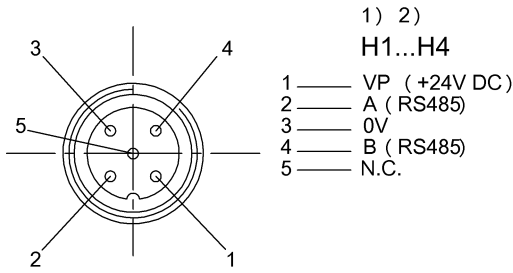


- 1) View towards connector  
 2) Female 5-pin/ Function

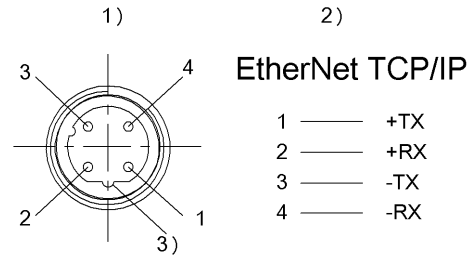


- 1) View towards connector  
 2) Female  
 3) Coding D

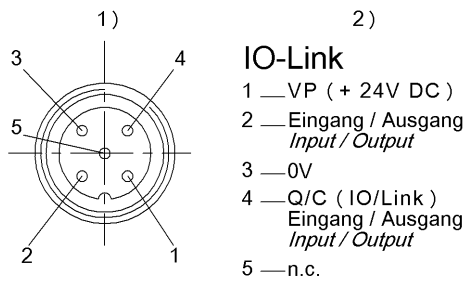

- 1) View towards connector  
 2) Female 5-pin/ Function

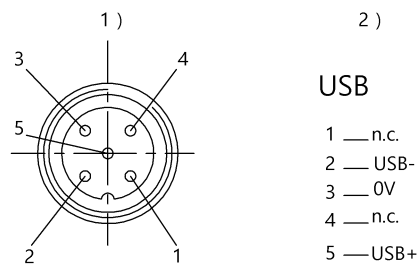

- 1) View towards connector  
 2) Female 5-pin/ Function

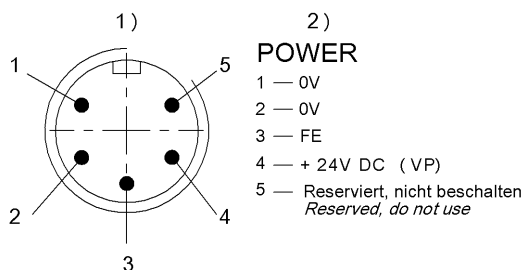

- 1) View towards connector  
 2) Male 5-pin/ Function