

Junction blocks

BPI AM304P-5K-B0-KPXP0-030

Order Code: BPI00EZ

BALLUFF

Remarks

Cable construction acc. to UL-AWM Style 20549/10493


Flame resistance per IEC 60332-1-2

Flame resistance per UL 758/1581 FT2

Oil resistant per DIN EN 60811-404 (VDE 0473-811-404)

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings



I/O ports


PIN 1: +24V

PIN 2: Normally closed

PIN 3: 0V

PIN 4: Normally open

Wiring Diagrams

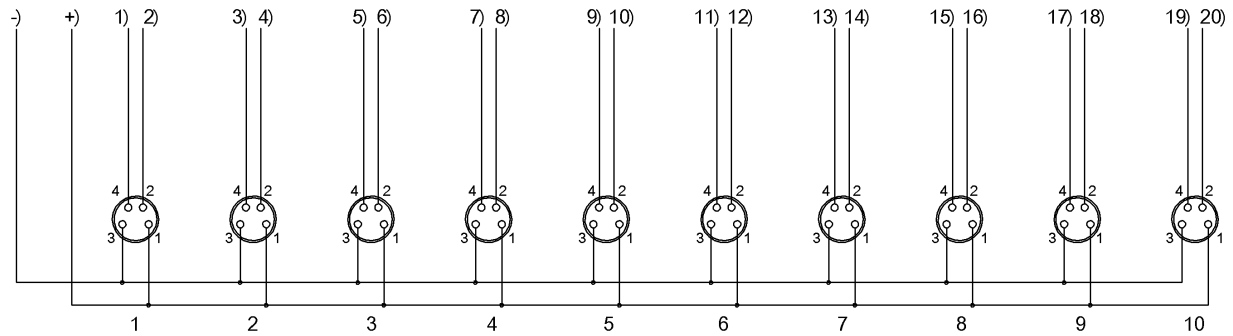

-) blue 0.75 mm²

+) brown 0.75 mm²

1) white

2) gray/pink

3) green

4) red/blue

5) yellow

6) white/green

7) gray

8) brown/green

9) pink

10) white/yellow

11) red

12) yellow/brown

13) black

14) white/gray

15) violet

16) gray/brown

17) white/pink

18) white/blue

19) pink/brown

20) brown/blue