



## Ethernet





CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	60 VAC/VDC
OUTER JACKET MATERIAL/COLOR	TPU/TEAL (HALOGEN-FREE)
CONDUCTOR INSULATION MATERIAL	PE
NUMBER OF CONDUCTORS [AWG]	4x26 AWG, STRANDED, CAT 5E
SHIELDING	ALUM.-POLYESTER FOIL/T-C BRAIDED
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)
PROTECTION CLASS	MEETS IEC IP67

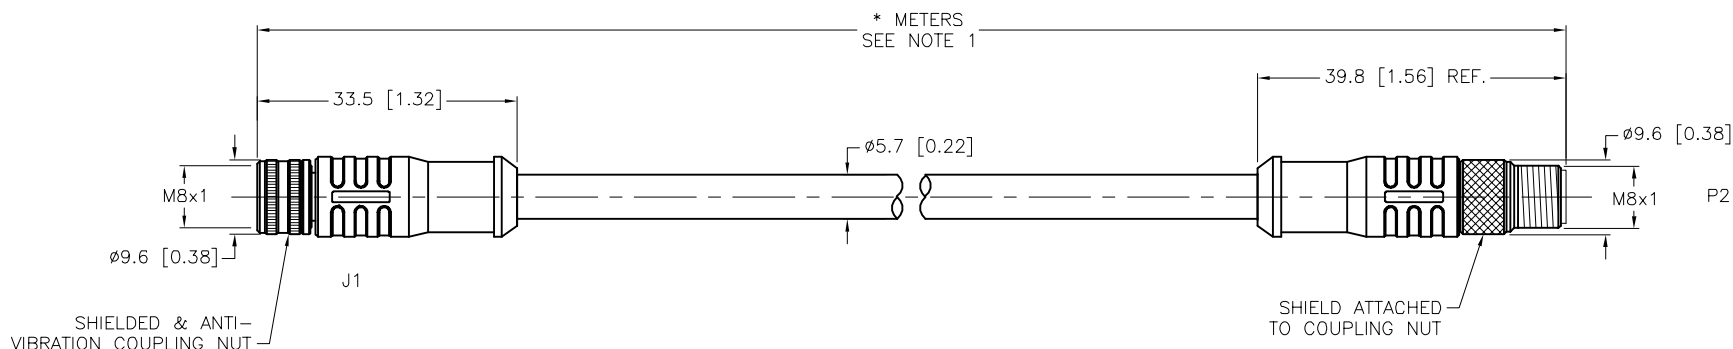

<b>CABLE LENGTH</b>	<b>TOLERANCE*</b>
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
<b>STRIP LENGTH</b>	<b>TOLERANCE*</b>
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
<b>* UNLESS OTHERWISE SPECIFIED</b>	

## 2. MULTIPROTOCOL AND ETHERCAT COMPATIBLE.

**SOURCE DRAWING - FOR REFERENCE ONLY**

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION  	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION	DRFT NF	DATE 11/02/15	DESCRIPTION  PKGS 4M PSGS 4M 4413-*M			
APVD F.M.		SCALE 1=1.0					
FINISH		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]  DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV  C	
				FILE: 777036514		SHEET 1 OF	