

Regulator

IR1200-A/2200-A/3200-A Series

RoHS

Air consumption “0”

Bleed air “0”

Lightweight

Reduced by up to approx. 27%*
[kg]

| IR | Current model | Series |
|------|---------------|----------|
| 0.13 | 0.14 | IR1200-A |
| 0.23 | 0.30 | IR2200-A |
| 0.47 | 0.64 | IR3200-A |

* Compared with the current IR1000/2000/3000

High flow rate

Up to approx. twice*
[L/min (ANR)]


| IR | Current model | Series |
|------|---------------|----------|
| 720 | 320 | IR1200-A |
| 1900 | 940 | IR2200-A |
| 5000 | 4000 | IR3200-A |

* Compared with the current IR1000/2000/3000

Space saving

New structure without fixed throttle does not require a mist separator.

Reduced by 71 mm
(For IR2200-A)

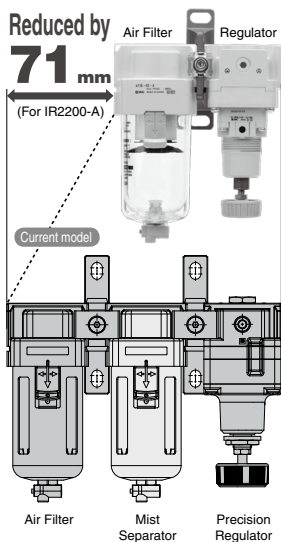

Digital pressure switch standardized



ARJ

AR425
to 935

ARX

AMR

ARM

ARP

IR0-A

IR

IRV

VEV

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA


VBAT

AP100


Reduction in air consumption

● Air consumption is reduced with a new original structure.

With this new original structure, running costs are reduced.

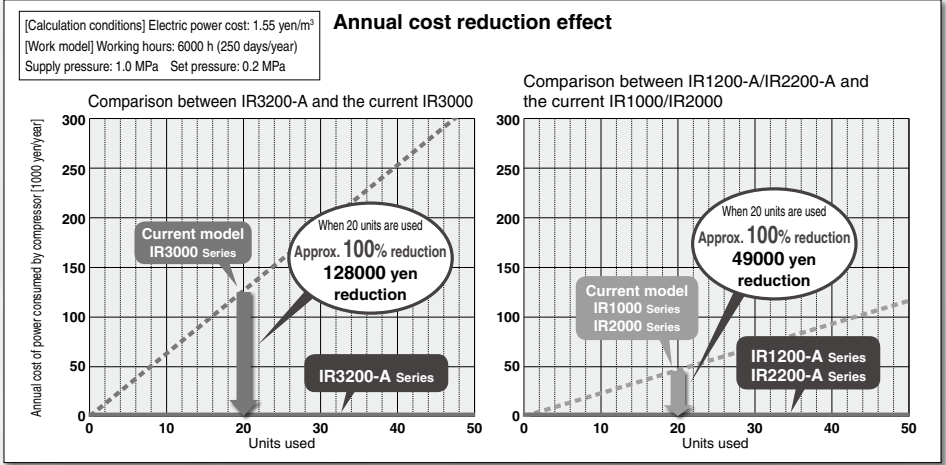

● No fixed throttle in the new design.

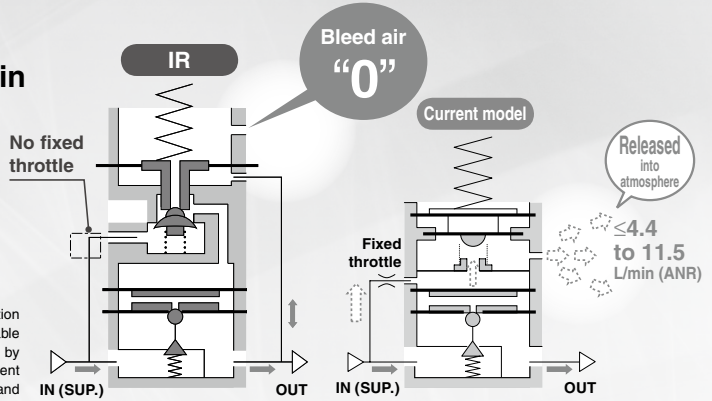


* Poor quality of air may cause operation failure. Select a model that is suitable for the desired air cleanliness by referring to "Air Preparation Equipment Model Selection Guide" (pages 2 and 3) for air quality.

● Flow rate: Up to approx. twice

(Compared to the current SMC product) [L/min (ANR)]

| IR | Current model | Series |
|------|---------------|----------|
| 720 | 320 | IR1200-A |
| 1900 | 940 | IR2200-A |
| 5000 | 4000 | IR3200-A |

Supply pressure: 0.7 MPa

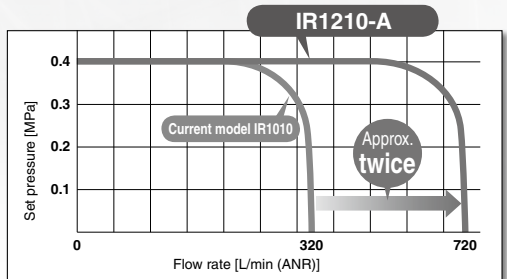

Supply pressure: 0.7 MPa


Weight

Reduced by up to approx. **27%** [kg]

| IR | Current model | Series |
|------|---------------|----------|
| 0.13 | 0.14 | IR1200-A |
| 0.23 | 0.30 | IR2200-A |
| 0.47 | 0.64 | IR3200-A |

Hexagon panel nut mounting

* Interchangeable with the current SMC product

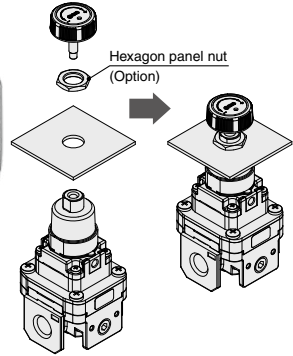


Digital pressure switch standardized



Pressure gauge

New IR can be used between a cylinder and solenoid valve.

(Refer to the Specific Product Precautions on page 788.)

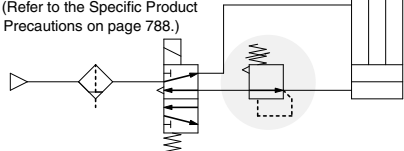




Note) The set pressure may vary depending on the elapsed time and change in ambient temperature after pressure setting. If the setting value varies, adjust the pressure with the knob.

Repeatability: $\pm 1\%$ (Full span)

Mounting is interchangeable with the current SMC model.

Exhaust (EXH) directions can be selected. (IR3200-A series)

Bottom and front exhaust added.



ARJ

AR425 to 935

ARX

AMR

ARM

ARP

IRQ-A

IR

IRV

VEV

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1


VBA

VBAT

AP100


● Application Examples

Constant fluid pressure Note)




- Since there is a large effective area for supply and exhaust pressure, setting can be done quickly.

Balance and drive Note) Accurate balance pressure setting




- Limits pressure fluctuation when driving a cylinder, maintaining excellent static and dynamic balance.

Contact pressure control Note)




- Adapts to the cylinder's piston displacement, maintaining a constant pressure.

Multistage control of pressing force for workpiece Note) (Wrapping machine)

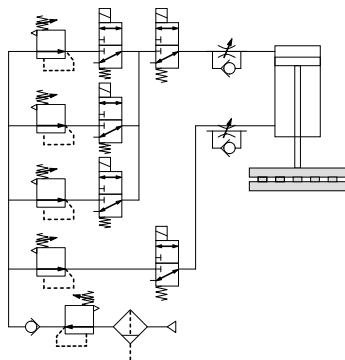


Residual pressure relief Note)

Ex.) Backflow from the tank

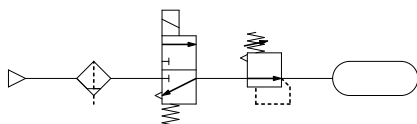

- Residual pressure is exhausted by relief function.
- It can be used between a cylinder and solenoid valve.


Adjustment of blow-line pressure Note)

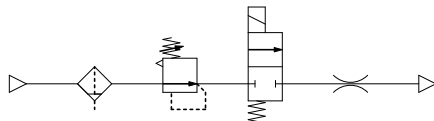

- Outlet pressure is less affected by fluctuation of inlet pressure. New IR offers consistent pressure control.

Note) The set pressure may vary depending on the elapsed time and change in ambient temperature after pressure setting. If the setting value varies, adjust the pressure with the knob.

Series Variations

| Basic Type (Knob) | Series | Model | Set pressure range (MPa) | Port size |
|---|---|-----------------|--------------------------|-----------|
| |  | IR1200-A | 0.02 to 0.2 | 1/8 |
| | | IR1210-A | 0.02 to 0.4 | |
| | | IR1220-A | 0.02 to 0.8 | |
|  | IR2200-A | 0.02 to 0.2 | 1/4 | |
| | IR2210-A | 0.02 to 0.4 | | |
| | IR2220-A | 0.02 to 0.8 | | |
|  | IR3200-A | 0.02 to 0.2 | 1/4, 3/8, 1/2 | |
| | IR3210-A | 0.02 to 0.4 | | |
| | IR3220-A | 0.02 to 0.8 | | |

ARJ

AR425 to 935

ARX

AMR

ARM

ARP

IR□-A

IR

IRV

VEX

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA

VBAT

AP100



Regulator

RoHS

IR1200-A/2200-A/3200-A Series

Symbol



Basic type
(Knob)

Standard Specifications

| Model | Basic type (Knob) | | |
|--|---------------------------|---------------------------|---------------------------|
| | IR12□0-A | IR22□0-A | IR32□0-A |
| Fluid | Air | | |
| Proof pressure | 1.5 MPa | | |
| Max. supply pressure | 1.0 MPa | | |
| Min. supply pressure ^{Note 1)} | Set pressure + 0.05 MPa | | |
| Set pressure range | IR1200-A: 0.02 to 0.2 MPa | IR2200-A: 0.02 to 0.2 MPa | IR3200-A: 0.02 to 0.2 MPa |
| | IR1210-A: 0.02 to 0.4 MPa | IR2210-A: 0.02 to 0.4 MPa | IR3210-A: 0.02 to 0.4 MPa |
| | IR1220-A: 0.02 to 0.8 MPa | IR2220-A: 0.02 to 0.8 MPa | IR3220-A: 0.02 to 0.8 MPa |
| Repeatability ^{Note 2)} | Within ±1% of full span | | |
| Port size | 1/8 | 1/4 | 1/4, 3/8, 1/2 |
| Pressure gauge port | 1/8 (2 locations) | | |
| Ambient and fluid temperature ^{Note 3)} | -5 to 60°C (No freezing) | | |
| Weight (kg) ^{Note 4)} | 0.13 | 0.23 | 0.47 |

Note 1) When there is no flow rate on the outlet.

Note 2) Other characteristics such as aging deterioration and temperature characteristics are not included.

Note 3) 0 to 50°C for the products with the digital pressure switch

Note 4) Without accessories

Accessories (Option)/Part No.

| Description | IR12□0-A | IR22□0-A | IR32□0-A |
|--|---------------------------------|-----------------|-------------|
| Bracket assembly ^{Note 1)} | IR10P-501AS | IR20P-501AS | IR30P-501AS |
| Hexagon panel nut | IR10P-600S | IR20P-600S | IR20P-600S |
| Round type pressure gauge ^{Note 2)} | 0.2 MPa setting | G33-2-□01 | G43-2-□01 |
| | 0.4 MPa setting | G33-4-□01 | G43-4-□01 |
| | 0.8 MPa setting | G33-10-□01 | G43-10-□01 |
| Digital pressure switch ^{Note 3)} | NPN 1 output | ISE30A-□01-N-ML | |
| | PNP 1 output | ISE30A-□01-P-ML | |
| | NPN 1 output/ Voltage output | ISE30A-□01-C-ML | |
| | NPN 1 output/ Current output | ISE30A-□01-D-ML | |

Note 1) This is an assembly of the bracket and resin panel nut.

Note 2) □ in part numbers for a round type pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

A 1.0 MPa pressure gauge is fitted for 0.8 MPa setting. Please contact SMC regarding the supply of pressure gauge with psi unit specifications.

Note 3) □ in part numbers for a digital pressure switch indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. For details on handling digital pressure switch and specifications, refer to the Best Pneumatics No. 8.

Please contact SMC regarding the supply of digital pressure switch with unit conversion function.

Modular Products and Accessories

| Applicable products and accessories | Applicable size | | |
|-------------------------------------|-----------------|-----------------|-----------------|
| | IR1200-A series | IR2200-A series | IR3200-A series |
| Filter | AF20-A | AF30-A | AF40-A |
| Spacer | Y200-A | Y300-A | Y400-A |
| Spacer with bracket | Y200T-A | Y300T-A | Y400T-A |

Refer to pages 427 and 430 for details of the modular applicable products and accessories. The former modular and mounting brackets can be used.

Regulator IR1200-A/2200-A/3200-A Series

How to Order

IR 1 2 0 0 - 01 BG - - A

1
 2
 3
 4
 5
 6
 7



- Option/Semi-standard: Select one each for a to e.
- Option/Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.

Made to Order (Refer to page 786-1)

| Symbol | Specifications/Content |
|--------|---------------------------|
| 10- | Clean series |
| -X1 | Non-grease specifications |
| IRM□- | Manifold specifications |

| | | Symbol | Description | ① Body size | | | |
|---|------------------------------|----------------------------------|---|--|---|---|---|
| | | | | 1 | 2 | 3 | |
| ② | Set pressure range | 0 | 0.02 to 0.2 MPa | ● | ● | ● | |
| | | 1 | 0.02 to 0.4 MPa | ● | ● | ● | |
| | | 2 | 0.02 to 0.8 MPa | ● | ● | ● | |
| | | + | | | | | |
| ③ | Exhaust direction | 0 | Bottom exhaust | ● | ● | ● | |
| | | 1 | Front exhaust | — | — | ● | |
| | | 2 | Rear exhaust | — | — | ● | |
| | | + | | — | — | ● | |
| ④ | Pipe thread type | Nil | Rc | ● | ● | ● | |
| | | N | NPT | ● | ● | ● | |
| | | F | G | ● | ● | ● | |
| | | + | | | | | |
| ⑤ | Port size | 01 | 1/8 | ● | — | — | |
| | | 02 | 1/4 | — | ● | ● | |
| | | 03 | 3/8 | — | — | ● | |
| | | 04 | 1/2 | — | — | ● | |
| | | + | | | | | |
| ⑥ | a | Mounting | Nil | Without mounting option | ● | ● | ● |
| | | | B ^{Note 2)} | With bracket | ● | ● | ● |
| | | | H | With hexagon panel nut (for panel mount) | ● | ● | ● |
| | | | + | | — | — | — |
| ⑥ | b | Pressure gauge | Nil | Without pressure gauge | ● | ● | ● |
| | | | G | Round type pressure gauge | ● | ● | ● |
| | | | EA | NPN open collector 1 output | ● | ● | ● |
| | | | EB | PNP open collector 1 output | ● | ● | ● |
| | | | EC | NPN open collector 1 output + Analog voltage output | ● | ● | ● |
| ⑥ | With digital pressure switch | ED | NPN open collector 1 output + Analog current output | ● | ● | ● | |
| | | + | | — | — | — | |
| ⑦ | c | Flow direction | Nil | Flow direction: Left to right | ● | ● | ● |
| | | | R | Flow direction: Right to left | ● | ● | ● |
| | | | + | | — | — | — |
| ⑦ | d | Knob | Nil | Upward | ● | ● | ● |
| | | | V | Downward | ● | ● | ● |
| | | | + | | — | — | — |
| ⑦ | e | Pressure unit ^{Note 3)} | Nil | Name plate and pressure gauge in imperial units: MPa | ● | ● | ● |
| | | | Z | Name plate and pressure gauge in imperial units: psi | ● | ● | ● |
| | | | ZA | Digital pressure switch: With unit conversion function | ● | ● | ● |

Note 1) Options are shipped together with the product, but not assembled. B and H cannot be selected at the same time. The current bracket cannot be used for this product.

Note 2) Assembly of a bracket and set nuts.

Note 3) See pressure unit table below.

| | Pipe thread type | Name plate in imperial units | Pressure gauge in imperial units | | Sales ^{Note 6)} |
|-----------------------|------------------|------------------------------|----------------------------------|---|--------------------------|
| | | | G | EA, EB, EC, ED | |
| Nil | Rc | MPa | MPa | Fixed SI unit | Japan, Overseas |
| | NPT | | | | |
| | G | | | | |
| Z ^{Note 4)} | Rc | psi | — | — | Only overseas |
| | NPT | | psi | With unit conversion function (Initial value psi) | |
| | G | | — | — | |
| ZA ^{Note 5)} | Rc | MPa | — | With unit conversion function | Only overseas |
| | NPT | | | | |
| | G | | | | |

Note 4) For pipe thread type: NPT

Note 5) For options: EA, EB, EC, ED

Note 6) According to the new Measurement Law, only the SI unit type is provided for use in Japan.

IR1200-A/2200-A/3200-A Series


IR1200-A Series

* The data shown below are representative values, and are not guaranteed.

Flow Rate Characteristics

IR1220-01-A


Supply pressure: 0.7 MPa

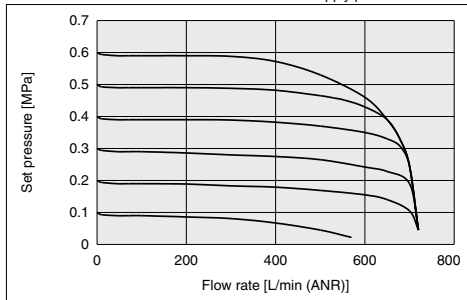

Relief Characteristics

IR1220-01-A


Back pressure: 0.7 MPa

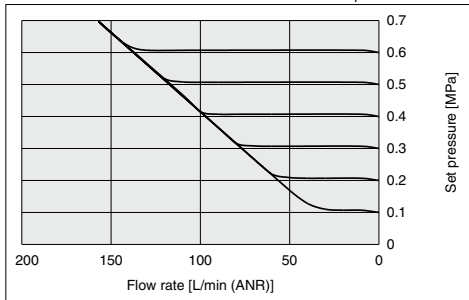

Pressure Characteristics


IR1200-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

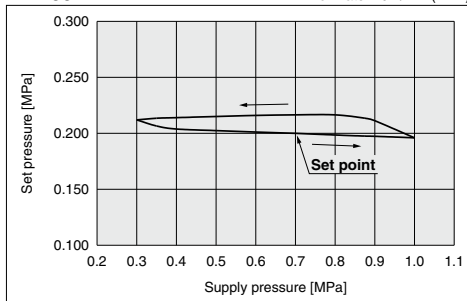


IR1220-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

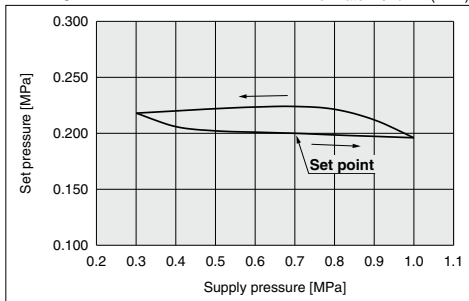

IR1210-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

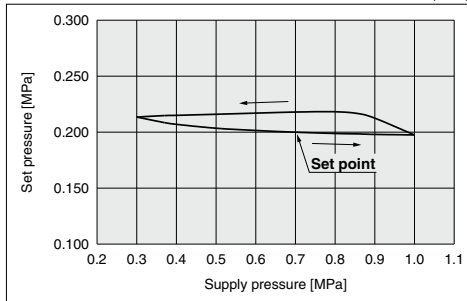

Regulator **IR1200-A/2200-A/3200-A Series**


IR2200-A Series

* The data shown below are representative values, and are not guaranteed.

Flow Rate Characteristics

IR2220-02-A


Supply pressure: 0.7 MPa

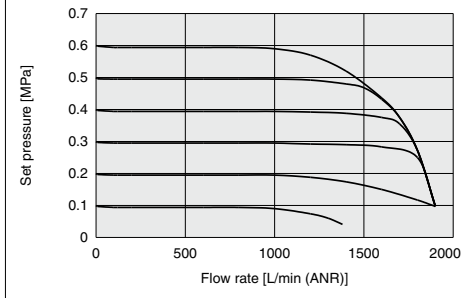

Relief Characteristics

IR2220-02-A


Back pressure: 0.7 MPa

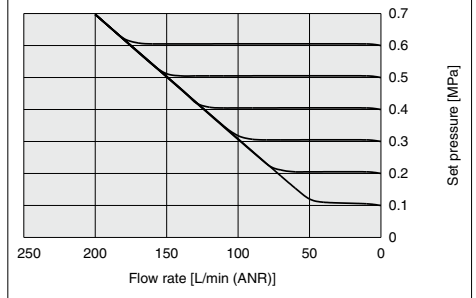

Pressure Characteristics


IR2200-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

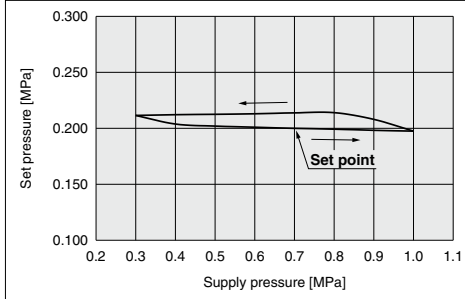


IR2220-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

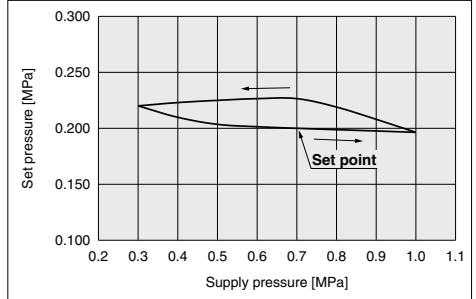

IR2210-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

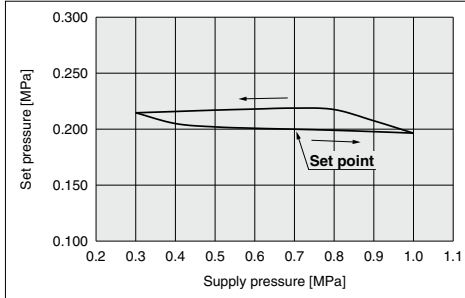

ARJ

AR425
to 935

ARX

AMR

ARM

ARP

IR□-A

IR

IRV

VEX

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA

VBAT

AP100

IR1200-A/2200-A/3200-A Series


IR3200-A Series

* The data shown below are representative values, and are not guaranteed.

Flow Rate Characteristics

IR3220-04-A


Supply pressure: 0.7 MPa

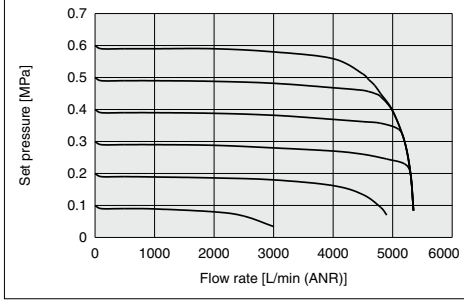

Relief Characteristics

IR3220-04-A


Back pressure: 0.7 MPa

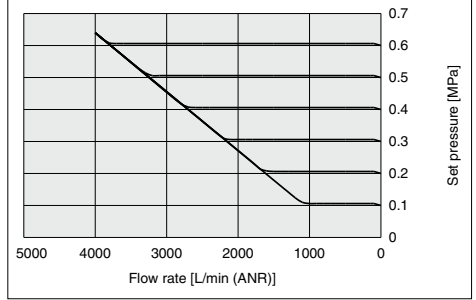

Pressure Characteristics


IR3200-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

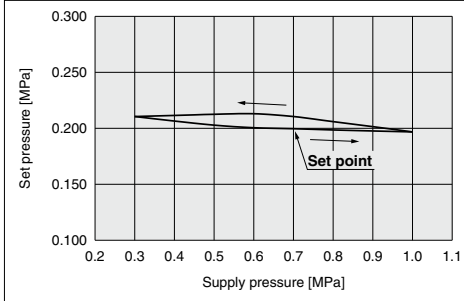


IR3220-A

Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

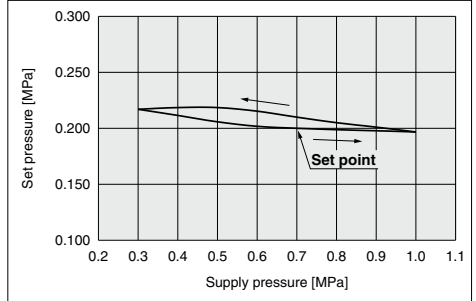

IR3210-A


Supply pressure: 0.3 to 1.0 MPa
Set pressure: 0.2 MPa
Flow rate: 20 L/min (ANR)

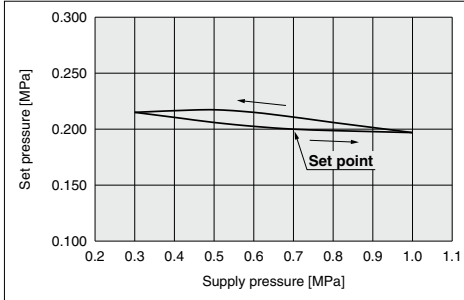

Regulator IR1200-A/2200-A/3200-A Series

Construction

Basic type (Knob): IR22□0-A

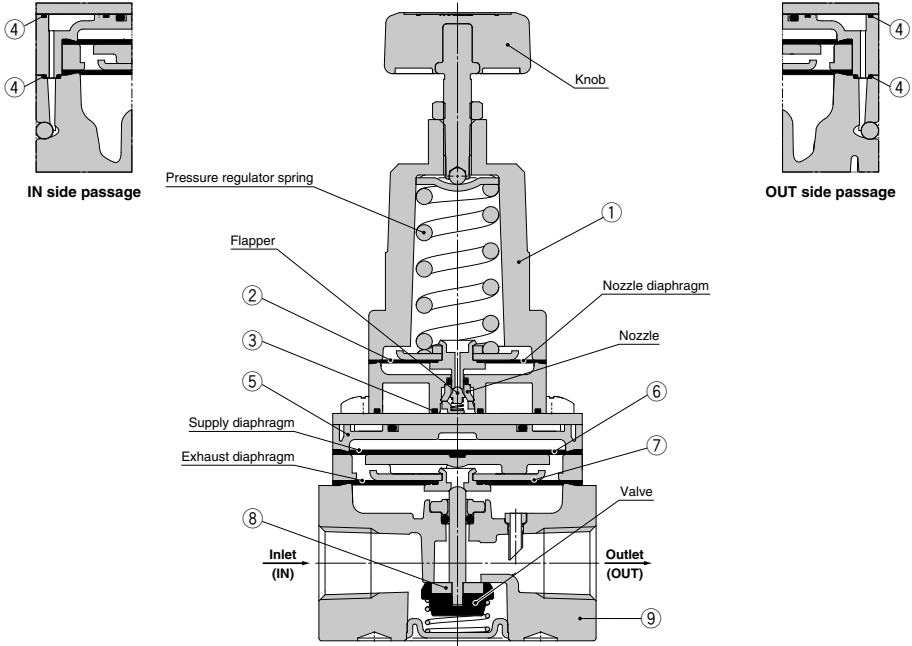

Working principle

When the knob is rotated, the flapper is pushed through the spring, and a gap is generated between the nozzle and flapper. The supply pressure flows to the inlet passes through the path between the nozzle and flapper and acts on the supply diaphragm as nozzle back pressure. The force generated by the diaphragm pushes down the valve, and the supply pressure flows to the outlet. The discharged air pressure acts on the exhaust diaphragm, and counteracts against the force generated by the supply diaphragm. The air pressure acts on the nozzle diaphragm at the same time, and counteracts against the compression force of the spring to adjust the set pressure. When the set pressure increases too much, the nozzle diaphragm is pushed up, and a gap is generated between the flapper and nozzle diaphragm after the flapper is closed. The balance of the supply diaphragm and exhaust diaphragm is lost when the nozzle back pressure flows into the atmosphere. The exhaust valve is open after the valve is closed, and excess pressure on the outlet is released to the air. Due to this pilot mechanism, pressure variations are detected and pressure adjustment is possible.

Component Parts

| No. | Description | Material | | |
|-----|----------------------------|--|----------|---------------------------------------|
| | | IR1200-A | IR2200-A | IR3200-A |
| 1 | Bonnet | Aluminum die-casted | | |
| 2 | Nozzle diaphragm assembly | Aluminum, Weather resistant NBR | | |
| 3 | Seal | HNBR | | |
| 4 | Seal | NBR | | |
| 5 | Diaphragm spacer | Polyacetal | | |
| 6 | Supply diaphragm | Weather resistant NBR | | — |
| 7 | Exhaust diaphragm assembly | Steel, Aluminum, Weather resistant NBR | | Aluminum, Weather resistant NBR, HNBR |
| 8 | Valve assembly | Stainless steel, Aluminum, HNBR | | Aluminum, HNBR |
| 9 | Body | Aluminum die-casted | | |

ARJ

AR425
to 935

ARX

AMR

ARM

ARP

IR□-A

IR

IRV

VEV

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA


VBAT

AP100



IR1200-A/2200-A/3200-A Series

Construction

Basic type (Knob): IR12□0-A




IN side passage





OUT side passage

Basic type (Knob): IR32□0-A




IN side passage


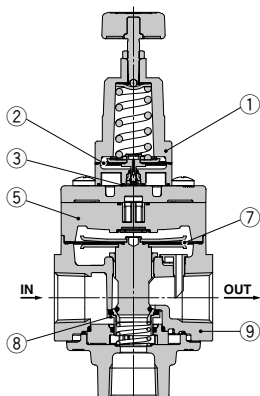


OUT side passage

Basic type (Knob): IR32□ $\frac{1}{2}$ -A



IN side passage

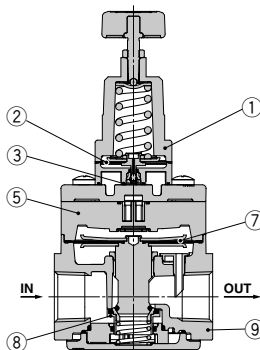


OUT side passage

Regulator *IR1200-A/2200-A/3200-A Series*




Dimensions

Basic type (Knob): IR12□0-01□-A

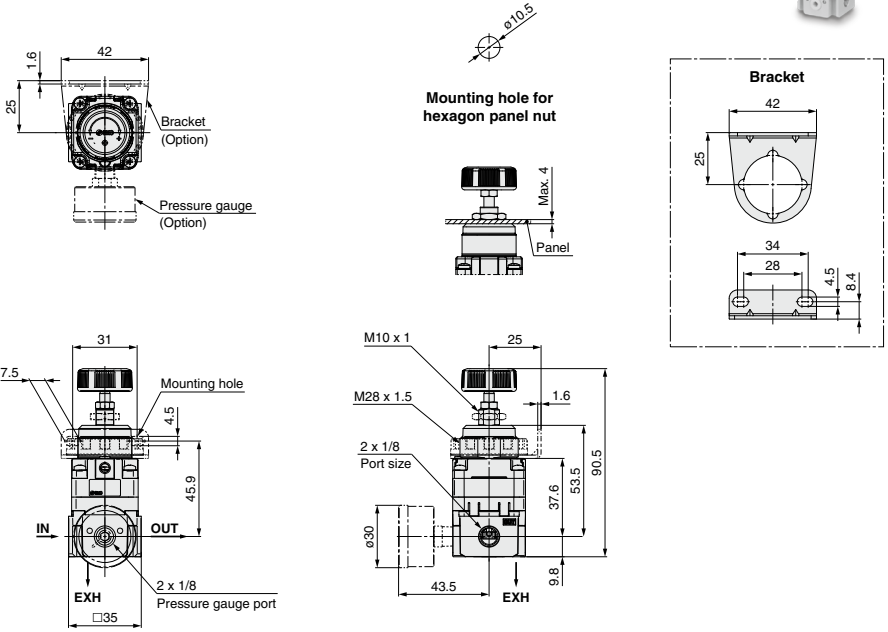

When connecting to the EXH port, contact your SMC sales representative separately.


With digital pressure switch: IR12□0-01□E□-A

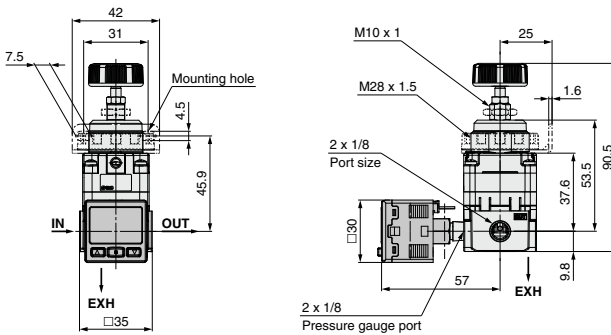





IR1200-A/2200-A/3200-A Series

Dimensions

Basic type (Knob): IR22□0-02□-A





Mounting hole for hexagon panel nut



When connecting to the EXH port, contact your SMC sales representative separately.


With digital pressure switch: IR22□0-02□E□-A

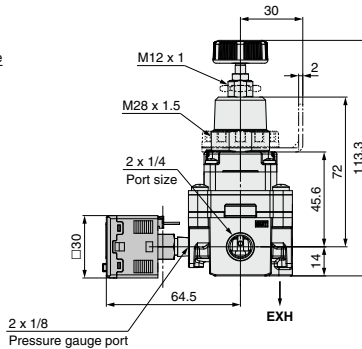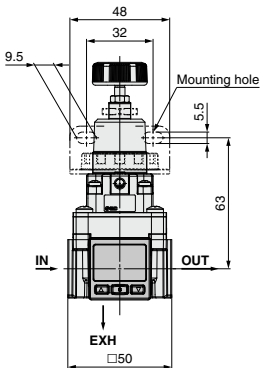


Regulator IR1200-A/2200-A/3200-A Series

Dimensions

Basic type (Knob): IR32□0-0□□-A

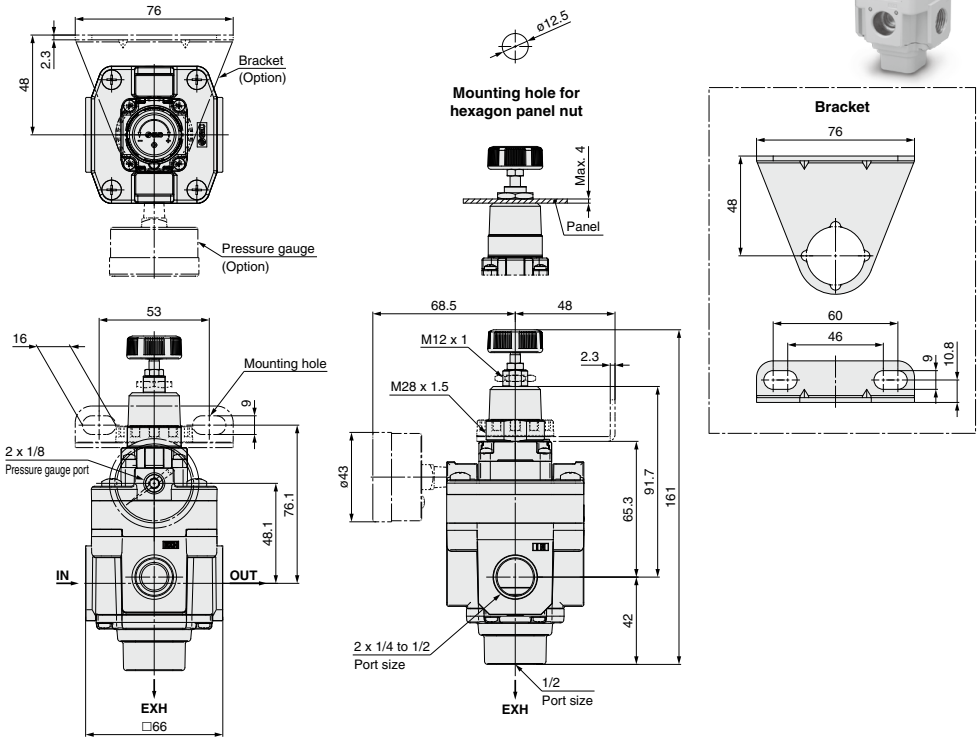

With digital pressure switch: IR32□0-0□□E□-A

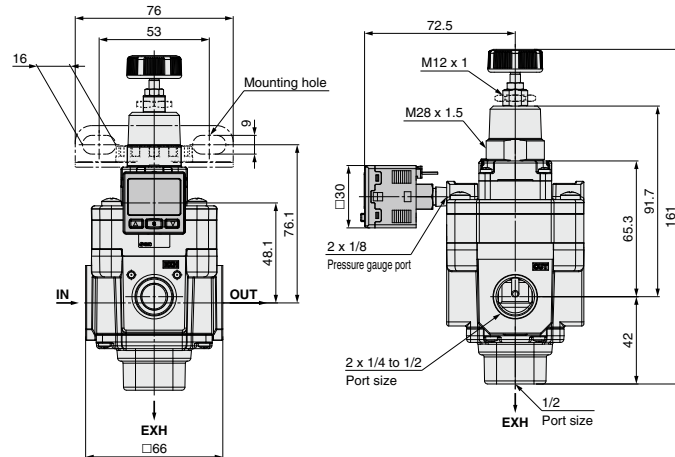

ARJ

AR425
to 935

ARX

AMR

ARM

ARP

IR□-A

IR

IRV

VEX

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA


VBAT

AP100


IR1200-A/2200-A/3200-A Series

Dimensions

Basic type (Knob): IR32□ $\frac{1}{2}$ -0□□-A

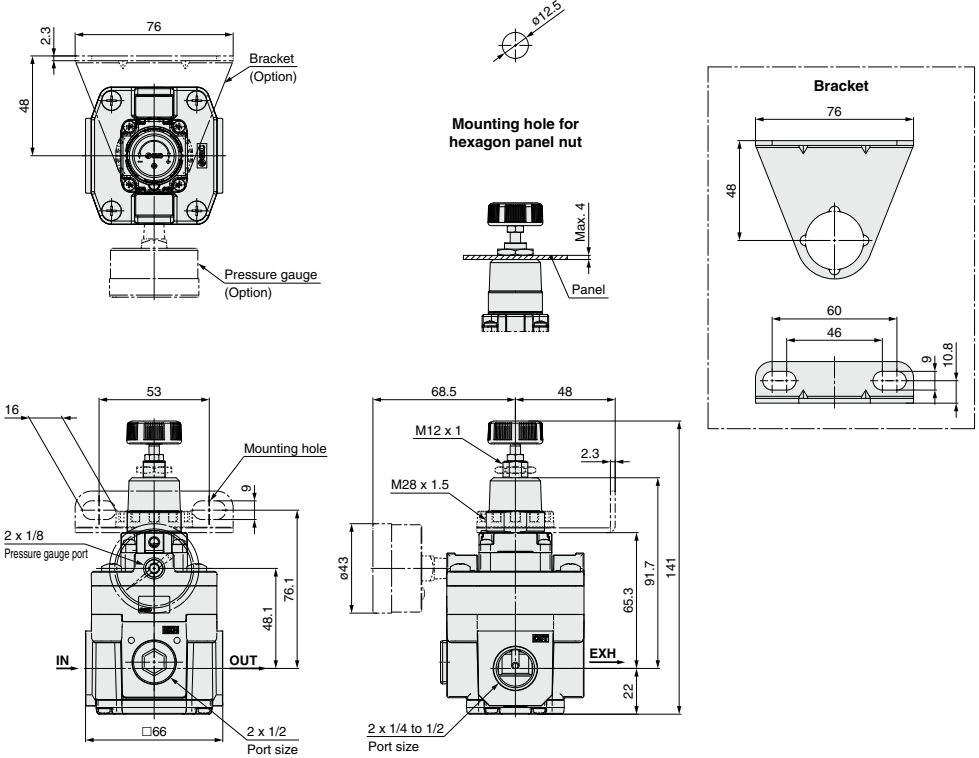

With digital pressure switch: IR32□ $\frac{1}{2}$ -0□□E□-A

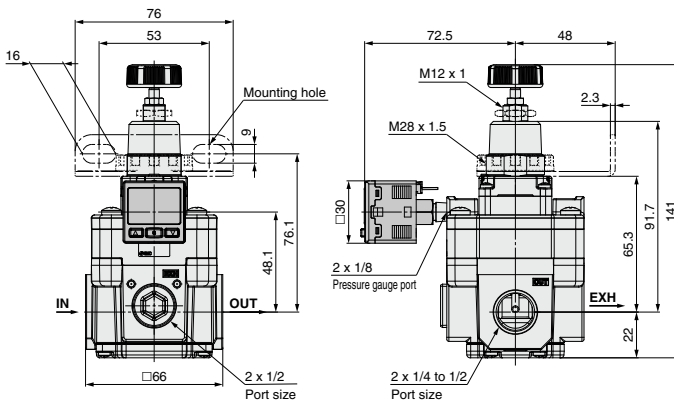

IR1200-A/2200-A/3200-A Series

Made to Order

Please contact SMC for detailed dimensions, specifications, each part number and lead times.



1 Clean Series

10 - IR 2 0 - - A

Clean series

Specifications

| | |
|----------------|--|
| Cleanliness | ISO Class 3 |
| Bleed hole | With M5 fitting (Applicable tubing O.D. ø6) |
| EXH port | IR1200-A series: With M5 fitting (Applicable tubing O.D. ø6) IR2200-A series: With R1/8 fitting (Applicable tubing O.D. ø6) IR3200-A series: 1/2 female thread |
| Pressure gauge | Oil-free + Stud parts nickle plated |
| Grease | Fluorine grease |

2 Non-grease Specifications

IR 2 0 - - A - X1

Non-grease specifications

Note 1) Assembly is performed in a general assembly environment.


Note 2) Parts are not washed.

Note 3) Fluorine grease is used on some of the wetted parts (sliding parts) and non-wetted parts (threaded part on the setting knob).

3 Manifold Specifications (Except IR3200-A series)

2 to 8 station manifold type regulators.

(Please contact SMC regarding 9 or more stations.)



IRM 12 - G - - - A

Blanking plate and quantity

B Blanking plate
1 to n pcs.

Set pressure and quantity

0 0.2 MPa setting 1 to n pcs.
1 0.4 MPa setting 1 to n pcs.
2 0.8 MPa setting 1 to n pcs.

Example 1) 0.4 MPa setting with 6 stations

IRM12-6G-16-A

Example 2) 0.2 MPa setting 2 pcs.

0.4 MPa setting 1 pc. with 5 stations

IRM22-5G-021221-A

Accessory (Pressure gauge)

| | |
|-----|--|
| Nii | None |
| G | IR1200-A series: G33- <input type="checkbox"/> -01 IR2200-A series: G43- <input type="checkbox"/> -01 |

Stations

| | |
|---|------------|
| 2 | 2 stations |
| ⋮ | ⋮ |
| 8 | 8 stations |

Thread type (Thread on the manifold base)

| | |
|-----|-----|
| Nii | Rc |
| N | NPT |
| F | G |

Body size

| | |
|----|-----------------|
| 12 | IR1200-A series |
| 22 | IR2200-A series |

Manifold type regulator

Specifications

| | | |
|----------------------------|--|--|
| Stations | 2 to 8 stations | |
| Port | Common SUP | IR1200-A series: 1/4, IR2200-A series: 1/2 |
| | Individual OUT | IR1200-A series: 1/8, IR2200-A series: 1/4 |
| | Individual EXH (From IR body) | |
| Set pressure | 0.2 MPa, 0.4 MPa and 0.8 MPa settings can be combined. | |
| Accessory (Pressure gauge) | G33- <input type="checkbox"/> -01(IR1200-A series), G43- <input type="checkbox"/> -01(IR2200-A series) | |

Note 1) Regulators to be manifolded are counted starting from stations 1 on the left side with the OUT ports in front.

Note 2) When regulators with a different set pressure are manifolded, viewing OUT ports from front, the low pressure range is installed on the left side and high pressure range is on the right side. In case of the Example 2) above mentioned, stations 1 and 2 are of 0.2 MPa setting, stations 3 and 4 are of 0.4 MPa setting, and station 5 is of 0.8 MPa setting.

Note 3) For the model with pressure gauge (G), the pressure gauge is shipped together, but not assembled.

ARJ

AR425 to 935

ARX

AMR

ARM

ARP

IR--A

IR

IRV

IVX

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA

VBAT

AP100



IR1200-A/2200-A/3200-A Series Specific Product Precautions 1

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 387 to 391 for F.R.L. Precautions.

Piping

⚠ Warning

1. Screw piping together with the recommended proper torque while holding the side with the female threads.


Looseness or faulty sealing will occur if tightening torque is insufficient, while thread damage will result if the torque is excessive.

Furthermore, if the side with the female threads is not held while tightening, excessive force will be applied directly to piping brackets, etc., causing damage or other problems.

Recommended Proper Torque [N·m]


| Connection thread | 1/8 | 1/4 | 3/8 | 1/2 (Note) |
|-------------------|--------|----------|----------|------------|
| Torque | 7 to 9 | 12 to 14 | 22 to 24 | 28 to 30 |

(Note) Tightening force for connecting to the EXH port of IR32□-A is 8 to 10 N·m.



2. Do not allow twisting or bending moment to be applied other than the weight of the equipment.

Provide separate support for external piping, as damage may otherwise occur.



3. Piping materials without flexibility such as steel tube piping are prone to be effected by excess moment load and vibration from the piping side. Use flexible tubing in between to avoid such an effect.

⚠ Caution

1. Preparation before piping


Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.

Piping

⚠ Caution

2. Winding of sealant tape

When screwing piping or fittings into ports, ensure that metal chips from the pipe threads or sealing material do not enter the piping. Also, when the sealant tape is used, leave 1.5 to 2 thread ridges exposed at the end of the threads.



Operating Environment

⚠ Warning

1. Do not use in an atmosphere having corrosive gases, chemicals, sea water, water, water steam, or where there is direct contact with any of these.
2. Do not operate in locations where vibration or impact occurs.
3. In locations which receive direct sunlight, provide a protective cover, etc.
4. In locations near heat sources, block off any radiated heat.
5. In locations where there is contact with spatter from water, oil or solder, etc., implement suitable protective measures.

Air Supply

⚠ Warning

1. Please consult with SMC when using the product in applications other than compressed air.
2. Do not use compressed air which includes chemicals, synthetic oils containing organic solvents, salt or corrosive gases, etc., as this can cause damage or malfunction.
3. If condensate in the drain bowl is not emptied on a regular basis, the bowl will overflow and allow the condensate to enter the outlet side. This will cause a malfunction of pneumatic equipment.

When removing drain is difficult, use of a filter with an auto drain is recommended.

⚠ Caution

1. Condensate or dust, etc. in the supply pressure line can cause malfunctions. In addition to an air filter (SMC AF series, etc.), please use a mist separator (SMC AM, AFM series) depending on the conditions. Refer to "Air Preparation Equipment Model Selection Guide" (pages 2 and 3) for air quality.
2. When a lubricator is used at the supply side of the product, it can cause malfunctions. Do not use a lubricator at the supply side of the product.

If lubrication is required for terminal devices, connect a lubricator on the output side of the regulator.

ARJ

AR425
to 935

ARX

AMR

ARM

ARP

IR□-A

IR

IRV

VEV

SRH

SRP

SRF

ITV

IC

ITVH

ITVX

PVQ

VY1

VBA

VBAT

AP100



IR1200-A/2200-A/3200-A Series Specific Product Precautions 2

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 387 to 391 for F.R.L. Precautions.

Maintenance

⚠ Warning

1. When the product is removed for maintenance, reduce the set pressure to "0" and shut off the supply pressure completely beforehand.
2. When a pressure gauge is to be mounted, remove the plug after reducing the set pressure to "0".
3. When using the regulator between a solenoid valve and an actuator, check the pressure gauge periodically. Sudden pressure fluctuations may shorten the durability of the pressure gauge.
A digital pressure gauge is recommended for such situation or as deemed necessary.

Handling

⚠ Caution

1. When the regulator with pressure gauge is used, do not apply impact to the product by dropping it, etc. during transportation or installation.
This may cause misalignment of the pressure gauge pointer.

Operation

⚠ Caution

1. Do not use a regulator outside the range of its specifications as this can cause failure. (Refer to the specifications.)
2. When mounting is performed, make connections while confirming port indications.
3. When mounting the bracket or tightening the hexagon panel nut on the panel, tighten them to the recommended proper torque.
Looseness or faulty sealing will occur if tightening torque is insufficient, while thread damage will result if the torque is excessive.

Recommended Proper Torque (N·m)

Set nut (for bracket)

| | | |
|---------|----------|----------|
| IR12□-A | IR22□0-A | IR32□□-A |
| 2.0±0.2 | | |

Hexagon panel nut (for knob type only)

| | | |
|----------|----------|----------|
| IR12□0-A | IR22□0-A | IR32□□-A |
| 3.5±0.5 | | |

4. To set the pressure using the knob, turn the knob in the direction that increases pressure and be sure to tighten the lock nut after the pressure is adjusted. When tightening the nut, tighten so that the knob does not move due to friction caused by tightening.

Operation

⚠ Caution

5. If the pressure is set in the direction that decreases pressure, the pressure may drop from the original set pressure. Turning the knob clockwise increases the outlet pressure, and turning it counterclockwise reduces the pressure.
6. When pressure is applied to the inlet of a regulator, make sure that the output is connected to the circuit. Air blow occurs from the outlet and it depends on the operating conditions.
7. The set pressure may vary depending on the elapsed time and change in ambient temperature after pressure setting. If the setting value varies, adjust with the knob.
8. If the directional control valve (solenoid valve, mechanical valve, etc.) is mounted and ON-OFF is repeated for a long time, the set pressure may vary. If the setting value varies, adjust with the knob.
9. There may be pulsation or noise depending on the pressure conditions, piping conditions and ambient environment. In this case, it is possible to improve the problem by changing the pressure conditions and piping conditions.
If the problem is not improved, contact your SMC sales representative.
10. The capacity of the output side is large, and when used for the purpose of a relief function, the exhaust sound will be loud when being relieved. Therefore, operate with a silencer (SMC AN series, etc.) mounted on the exhaust port (EXH port).
When using the IR1200-A and 2200-A series, contact your SMC sales representative.
11. When installing a pressure gauge to the product, do not apply pressure more than the maximum display pressure. This will cause a malfunction.
12. When using a regulator between a solenoid valve and cylinder, caution should be taken regarding the following points.
 - The residual pressure of the cylinder will be exhausted from the regulator's exhaust port. (Depending on the conditions, partial backflow may occur.)
 - When holding pressure at the intermediate position of a closed center solenoid valve, due to reduced pilot pressure the pressure inside the cylinder will not be able to be held because the regulator will perform an exhaust operation. If it is necessary for the pressure inside the cylinder to be held, please consider using in combination with a separate shut-off valve.
 - When releasing pressure at the intermediate position of an exhaust center solenoid valve, depending on the conditions, vacuum pressure may remain inside the cylinder. If the introduction of atmospheric pressure is required, please consider using in combination with a separate atmospheric pressure introduction valve.