



SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
LOCKING SLEEVE MATERIAL (J1)	POM, SNAP LOCK				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	125 VAC/VDC				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	3x24 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

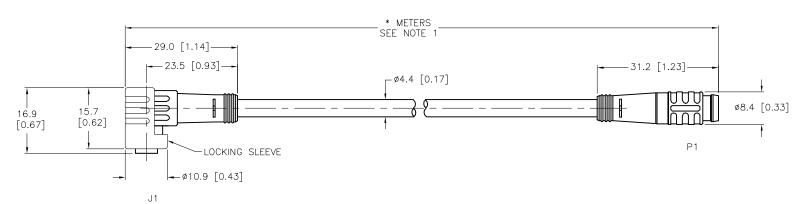



	*			
CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

RELATED DOCUMENTS

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. 3. MATERIAL ALL DIMENSIONS SEE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY FINISH CONTACT TURCK FOR MORE INFORMATION

SEE SPECIFICATIONS

3RD ANGLE

PROJECTION

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

DATE 11/21/06 DESCRIPTION RWC SCALE 1=1.0 APVD

PKW 3Z-*-PSG 3

UNIT OF MEASUREMENT

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT WRITTEN PERMISSION IS

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO. REV FILE: 777008361 SHEET 1 OF 1

В	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.