



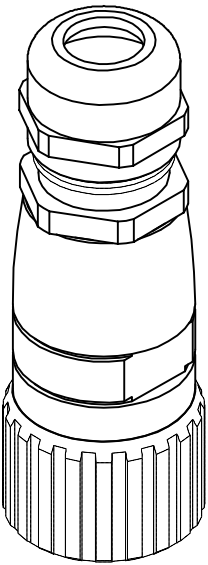

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL-PLATED BRASS
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	12/18 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C to 125°C (-40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE GRIP RANGE	4mm (.157") TO 10mm (.394")

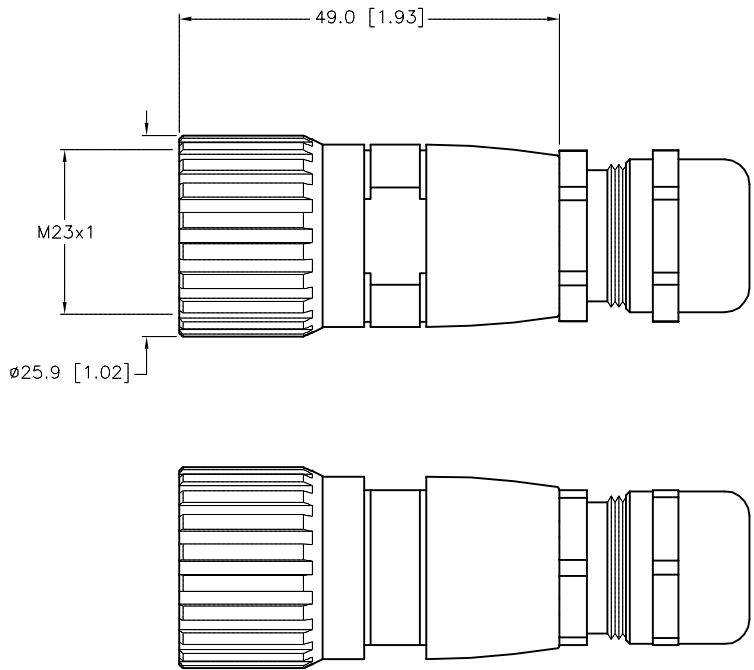

NOTES:

1. USE TOOL PART NUMBER "CK-TOOL" TO AID WITH ASSEMBLY OF FIELD-WIREABLE

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:  1. USE TOOL PART NUMBER "CK-TOOL" TO AID WITH ASSEMBLY OF FIELD-WIREABLE	RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
	1. 2. 3. 4.											
	MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION				DRFT RDS		DATE 02/06/02	
							APVD		SCALE 1 = 1.0			
	FINISH						UNIT OF MEASUREMENT  MILLIMETER [ INCH ]  DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.  U0200	
						FILE: U0200			SHEET 1 OF 1			
D	ADD NOTES			RDS	10/09/20	76214						
REV	DESCRIPTION			BY	DATE	ECO NO.						