


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	5×22 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

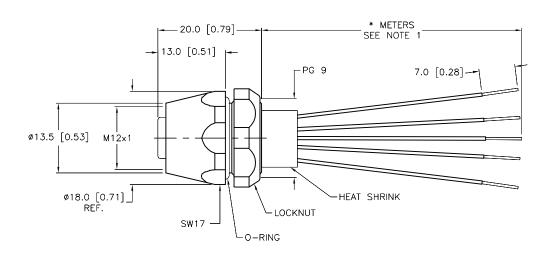

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

## NOTES:

1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

Ε	ADD HEAT SHRINK PER ECO	TV	08/02/16	55921
REV	DESCRIPTION	BY	DATE	ECO NO.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		PCH INC Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
MATERIAL		DRFT RDS	DATE 05/28/03	DESCRIPTION	- <b>.</b>
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=.8	FKV 4.	5-*
DRAWING ARE FO		UNIT OF MEASUREMENT		IDENTIFICATION NO.	l REV
FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.	
SEE SPECIFICATIONS	FOR MORE INFORMATION	IVIII LIIVIL I L	-11 ( III ( III )		
		DO NOT SCALE THIS DRAWING		FILE: 777001576	SHEET 1 OF 1