



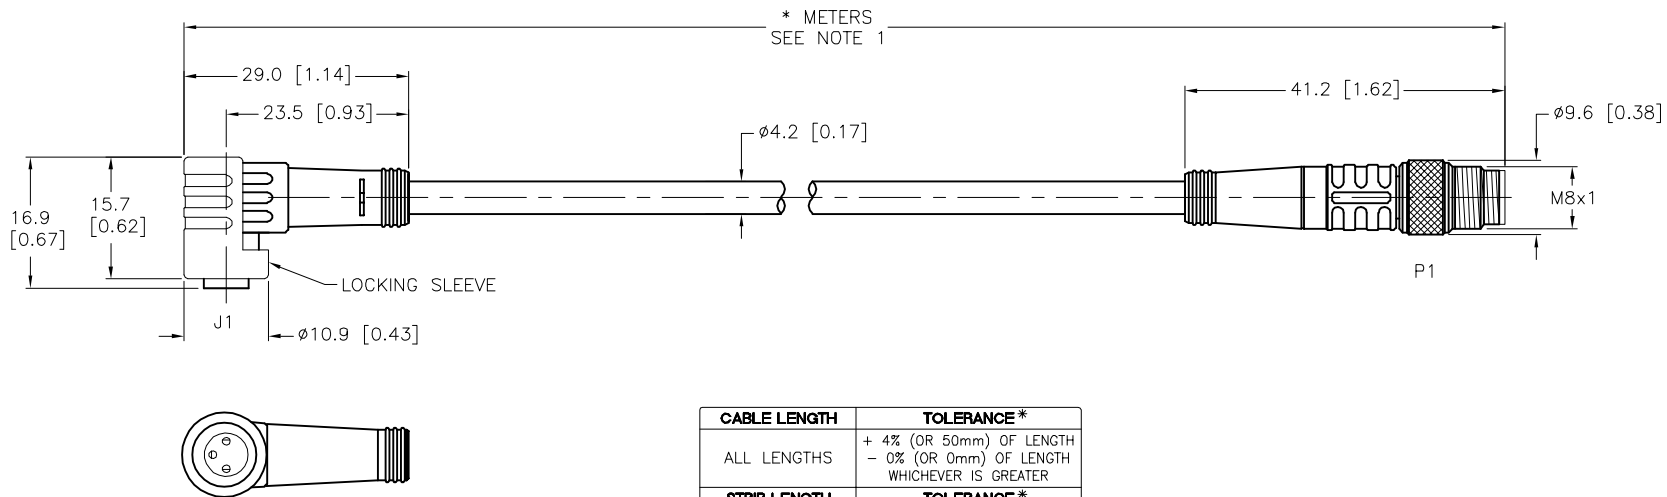




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 3 = BLUE 4 = BLACK</p> 	 <p>1 = BROWN 3 = BLUE 4 = BLACK</p> 	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		LOCKING SLEEVE MATERIAL (J1)	POM, SNAP LOCK
		COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	125 V
		OUTER JACKET MATERIAL/COLOR	TPU/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x24 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
					1. 2. 3. 4.								
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY						
					SEE SPECIFICATIONS								
					FINISH								
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DRFT RWC		DATE 07/28/09			DESCRIPTION PKW 3Z-*--PSG 3M				
		APVD		SCALE 1 = 1.0									
						UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV E			
								DO NOT SCALE THIS DRAWING		FILE: 777024970		SHEET 1 OF 1	