

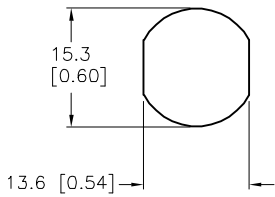
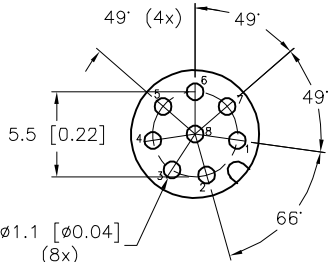
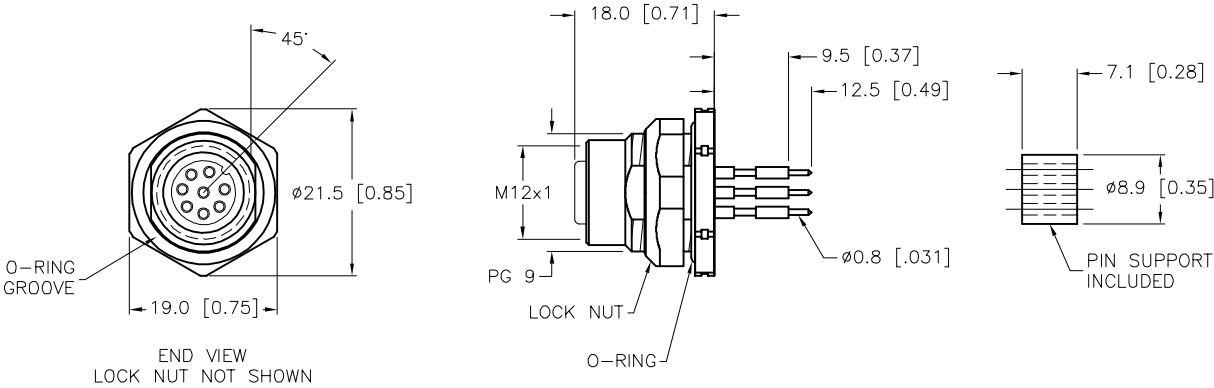




FEMALE END VIEW	TYPICAL PANEL CUTOUT	TYPICAL BOARD LAYOUT	SPECIFICATIONS	
 		 SCALE: 2=1	CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	1.5 A
			RATED VOLTAGE [V]	60 VAC/75 VDC
			NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
			TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
			MAX. PANEL THICKNESS	3.0 [0.12]



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY							
					SEE SPECIFICATIONS									
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		DESCRIPTION  FKFD 8			
					SEE SPECIFICATIONS						IDENTIFICATION NO.  U4501-3		REV  F	
F NOTATE THE KEYWAY IS 45° FROM THE MOUNTING FLAT RDS 04/25/22 77572											DO NOT SCALE THIS DRAWING		FILE: U4501-3	
REV DESCRIPTION					BY DATE ECO NO.									