


SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
LOCKING SLEEVE MATERIAL	POM, SNAP LOCK				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	125 VAC/VDC				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	3x24 AWG				
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

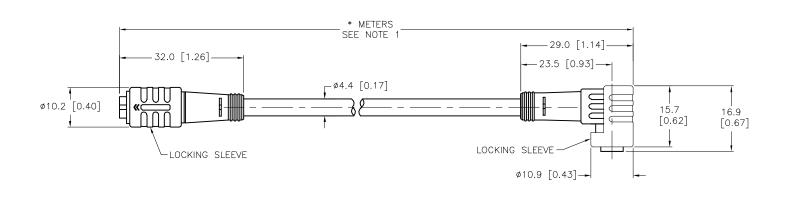

CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

## NOTE PRELIMINARY SPECIFICATIONS

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK			MINNEAPO		55441
2. 3.	$\bigoplus$	INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS		RC	(763)	)-544-   553-7   553-0	
4.	'	PROHIBITED.			` ww	w.turck.ı	ıs
MATERIAL			DATE 02/15/11	DESCRIPTION DKC	37-*-PKW 3	37	
	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	1 KC	3 JZ I KW S	<i>J</i>	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.			REV
FINISH	CONTACT TURCK FOR MORE	MILLIMETE	ER [ INCH ]	is a second seco			P1
	INFORMATION						
		DO NOT SCALE	THIS DRAWING	FILE: 777008232		SHEET	1 OF 1

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

Р1		RDS	02/15/11	
REV	DESCRIPTION	BY	DATE	ECO NO.