




Datasheet

RS PRO DC FAN 120x120x25mm

Stock Number: 230-3034

EN

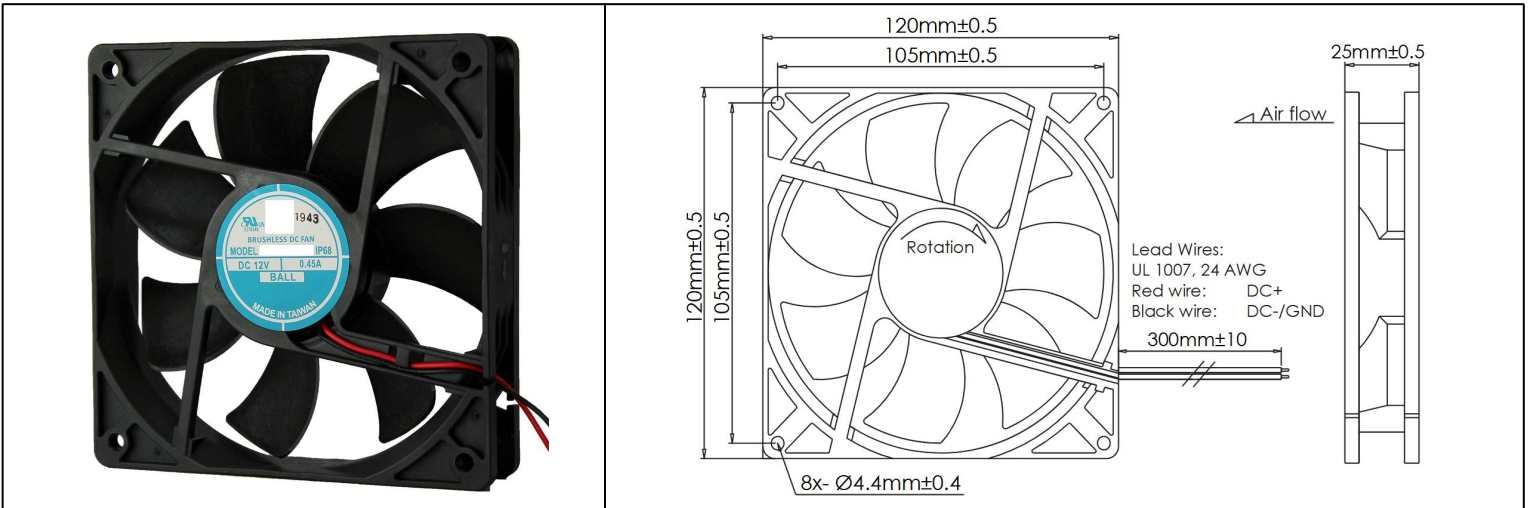

Frame	PBT, UL94 V-0 Plastic	<u>Operating Temperature</u> -15°C ~ +65°C	
Impeller	PBT, UL94 V-0 Plastic	<u>Storage Temperature</u> -25°C ~ +75°C	
Connection	2x Lead Wires, 24 AWG	<u>Life Expectancy</u> 60,000 hours (L10 at 35°C)	
Motor	Brushless DC, Auto Cutoff, Auto Restart, Electronically Protected, IP68	Weight: 152g (0.34 lbs)	
Bearing System	Dual Ball Bearings		
Dielectric Strength	500VAC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VDC		

Model Number	
Rated Voltage	12 VDC ± 10%
Rated Power (Watts)	5.4 ± 15%
Rated Current (A)	0.45 ± 15%
Rated Speed (RPM)	3100 ± 15%
Airflow (CFM)	120 ± 15%
Noise Level (dB)	42
Max. Static Pressure	0.24" H ₂ O ± 15%