| FEMALE END VIEW | MALE END VIEW |
|---|---|
|  |  |
| 1 = BROWN<br>2 = WHITE<br>3 = BLUE<br>4 = BLACK | 1 = BROWN<br>2 = WHITE<br>3 = BLUE<br>4 = BLACK |

| SPECIFICATIONS | |
|---|---|
| CONTACT CARRIER MATERIAL | NYLON or TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 250 V |
| OUTER CABLE JACKET MATERIAL/COLOR | TPE/YELLOW |
| CONDUCTOR INSULATION MATERIAL | PVC |
| NUMBER OF CONDUCTORS [AWG] | 4x18 AWG |
| TEMPERATURE RANGE | −40°C to +105°C (−40°F to +221°F) |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 |

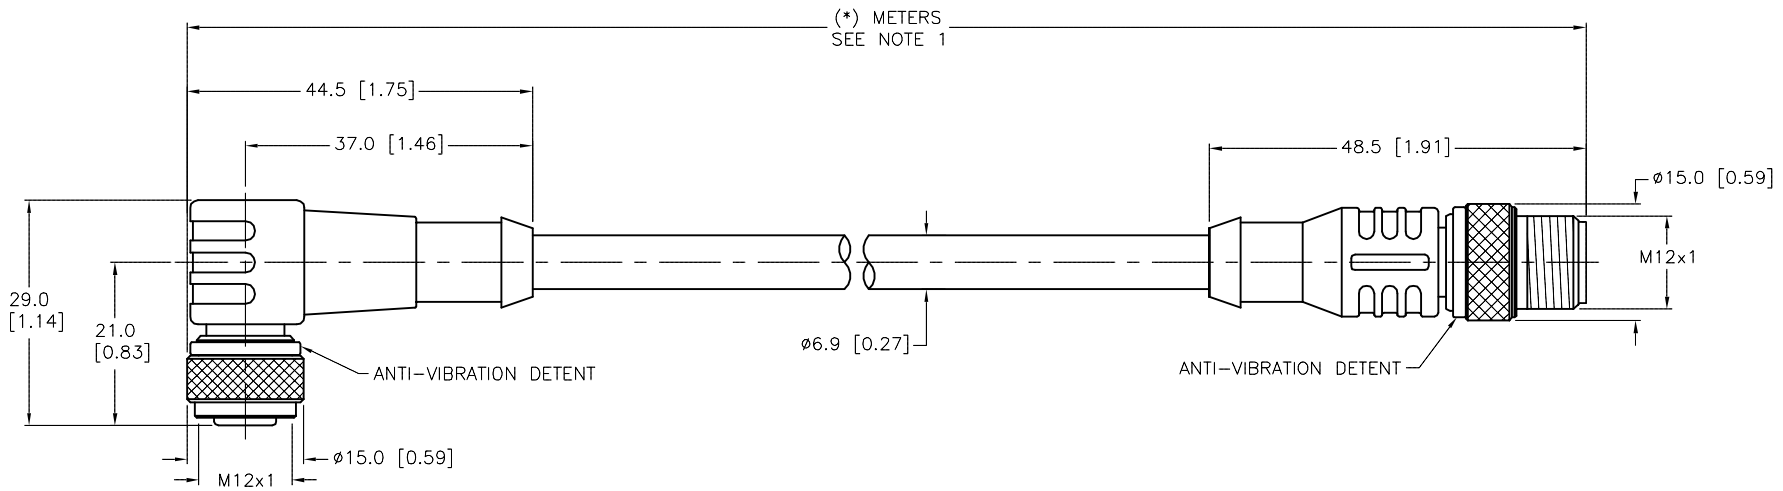


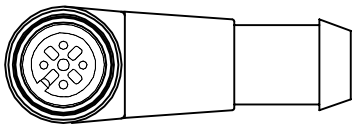

| CABLE LENGTH | TOLERANCE * |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| **STRIP LENGTH** | **TOLERANCE *** |
| 0-7mm | ±0.5mm |
| 8-29mm | ±1.0mm |
| 30-49mm | ±2.0mm |
| 50-69mm | ±3.0mm |
| 70-100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |
| *UNLESS OTHERWISE SPECIFIED | |

**SOURCE DRAWING - FOR REFERENCE ONLY**

NOTES:

1. (*) INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1587" DESIGNATES (ENDUROFLEX) TPE CABLE.

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| E | UPDATED M12 CTA PER ECO | TV | 11/16/16 | 52506 |

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: RDS | DATE: 10/10/03

APVD: | SCALE: 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION: WKC 4.4T-*-RSC 4.4T/S1587

IDENTIFICATION NO.:

REV: E

FILE: 777002623

SHEET 1 OF 1

Approved 11/21/2016, work order #119936 by T.S.