


SPECIFICATIONS						
TPV/BLACK						
TPV/WHITE						
BRASS/GOLD						
STAINLESS STEEL/PASSIVATED						
4.0 A						
250 V						
TPV/WHITE						
POLYESTER ELASTOMER						
4x22 AWG						
-40°C to +105°C (-40°F to +221°F)						
MEETS NEMA 1,3,4,6P and IEC IP68						

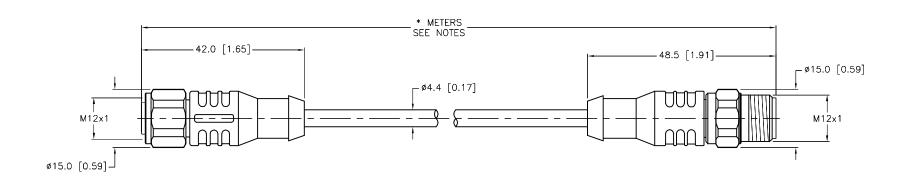

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

NOTES:

REV DESCRIPTION

UPDATE MATERIAL SPECIFICATIONS

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

			RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAW				3000 CAMI MINNEAPOLIS		
			2.		PROPERTY OF TURCK INC. USE OF THIS		PROPERTY OF TURCK INC. USE OF THIS			1-800-544-7769	
ORDER			3. 4.		DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		High Technology	Sensors and Automation Control	(763) 55	3-0708 fax .com	
			MATERIAL		DRFT R	RWC	DATE 03/31/09	DESCRIPTION			
			SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD		SCALE 1=1.0	WD-RKCV 4.4	T-*-RSCV	4.4T	
			SEL SI LOII ICATIONS	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME		ASUREMENT	IDENTIFICATION NO		I pp/	
			FINISH	CONTACT TURCK	MILLIMETE		R [INCH]	IDENTIFICATION NO.		REV	
-	07/21/15	50672	SEE SPECIFICATIONS	FOR MORE INFORMATION	IVIII IVIII I L		31 [11(0)1]				
	DATE	ECO NO.			DO NO	OT SCALE	THIS DRAWING	FILE: 777024228	SI	HEET 1 OF 1	
				-							

SOURCE DRAWING - FOR REFERENCE ONLY