




Datasheet

RS PRO DC FAN 172x150x51mm

Stock Number: 230-3038

EN

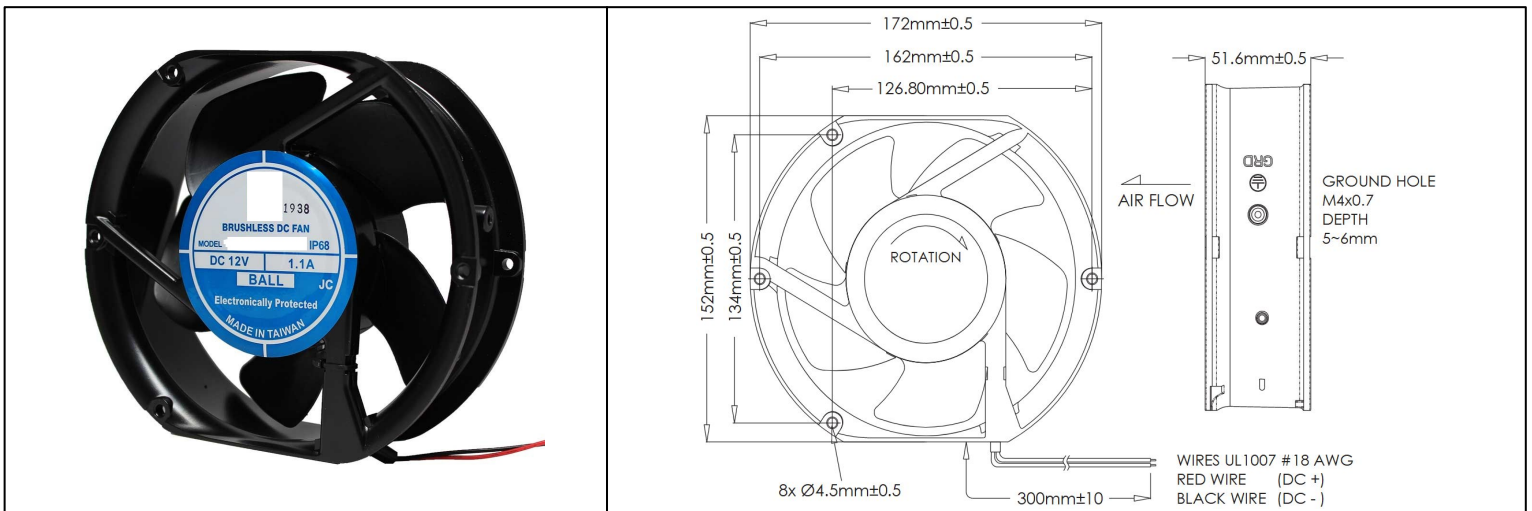

Frame	Die Cast Aluminum	<p><u>Operating Temperature</u> -15°C ~ +65°C</p> <p><u>Storage Temperature</u> -25°C ~ +75°C</p> <p><u>Life Expectancy</u> 90,000 hours (L10 at 35°C)</p> <p>Weight: 0.82Kgs (1.8 lbs)</p>	
Impeller	PBT, UL94 V-0 Plastic		
Connection	2x Lead Wires, 22 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Electronically Protected, IP68		
Bearing System	Dual Ball Bearings		
Dielectric Strength	1500VAC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VDC		

Model Number	
Rated Voltage	24 VDC ± 10%
Rated Power (Watts)	15 ± 15%
Rated Current (A)	0.97 ± 15%
Rated Speed (RPM)	3300 ± 15%
Airflow (CFM)	235 ± 15%
Noise Level (dB)	52
Max. Static Pressure	0.79" H ₂ O ± 15%