

Pin busbar, 16 mm<sup>2</sup> connection: 6x 3-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

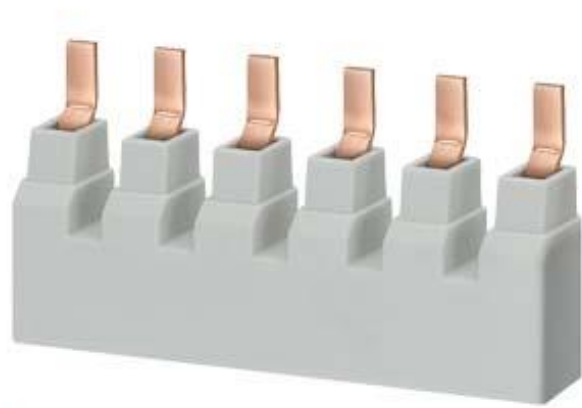


Figure similar

| Model                         |                                   |
|-------------------------------|-----------------------------------|
| Product brand name            | SETRON                            |
| Product designation           | Pin busbar                        |
| Design of the product         | 16 mm <sup>2</sup> , 6x3PH, UL489 |
| General technical data        |                                   |
| Phase number                  | 3                                 |
| Cross-section                 | 16 mm <sup>2</sup>                |
| Product details               |                                   |
| Product feature / insulated   | Yes                               |
| Connections                   |                                   |
| Type of electrical connection | Pin                               |
| Mechanical Design             |                                   |
| Width                         | 15 mm                             |
| Length                        | 310 mm                            |
| Net weight                    | 241.99 g                          |

## Certificates

**General Product Approval**

**Declaration of Conformity**



UR



EG-Konf.

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3665-2HG>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3665-2HG>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3665-2HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3665-2HG)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

