PRODUCT INFORMATION PACKET



Model No: 192015.00 Catalog No: 192015.00

0.25 HP General Purpose, 3 phase, 1800 RPM, 230/460 V, 63D Frame, TEFC

Aluminium TEFC Motors





Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E




Nameplate Specifications

Output HP	0.25 Hp	Output KW	0.19 kW			
Frequency	60 Hz	Voltage	230/460 V			
Current	1.0/0.50 A	Speed	1700 rpm			
Service Factor	1.15	Phase	3			
Efficiency	68 %	Power Factor	62.5			
Duty	Continuous	Insulation Class	F			
Design Code	В	KVA Code	н			
Frame	63	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	No	Ambient Temperature	40 °C			
Drive End Bearing Size	6202	Opp Drive End Bearing Size	6202			
UL	Recognized	CSA	Υ			
CE	Υ	IP Code	55			


Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter		
Poles	4	Rotation	Reversible		
Resistance Main	26.59 Ohms	Mounting	В3		
Motor Orientation	Horizontal	Drive End Bearing	Ball		
Opp Drive End Bearing	Ball	Frame Material	Aluminum		
Shaft Type	IEC	Overall Length	8.54 in		
Frame Length	4.44 in	Shaft Diameter	0.437 in		
Shaft Extension	0.9 in	Assembly/Box Mounting	F3		
Outline Drawing	16986700	Connection Drawing	005465.01		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:14/10/2020

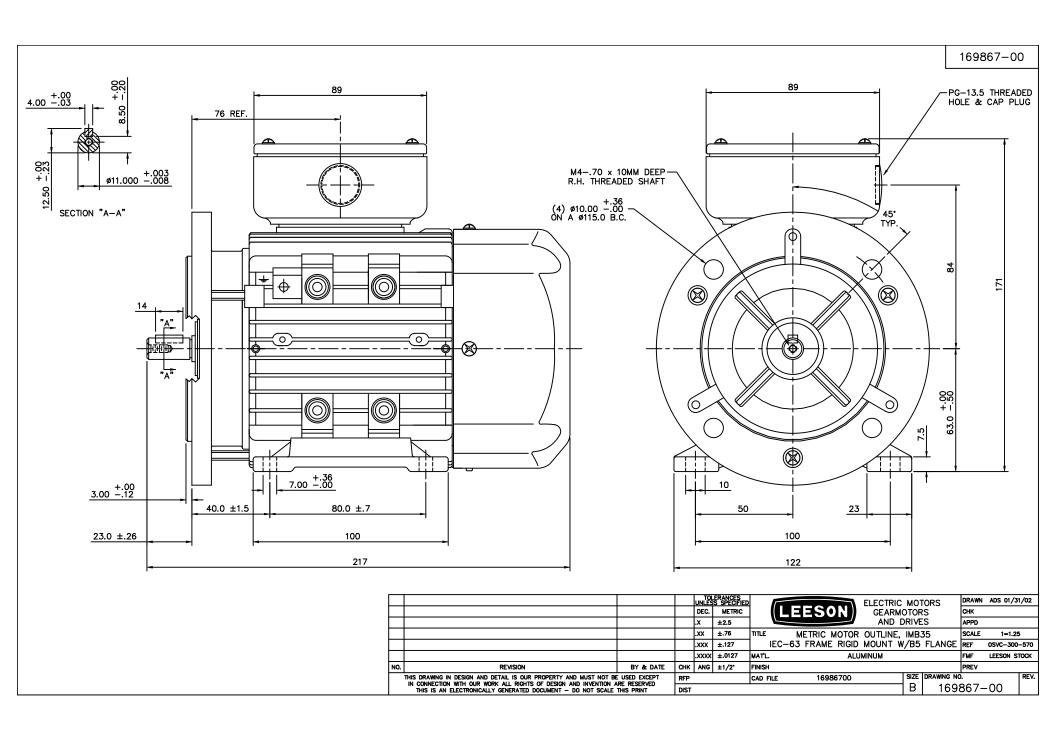

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval-STACK:
/CB
-dictionary/Pscript_WinNT_Compat
-dictionary-

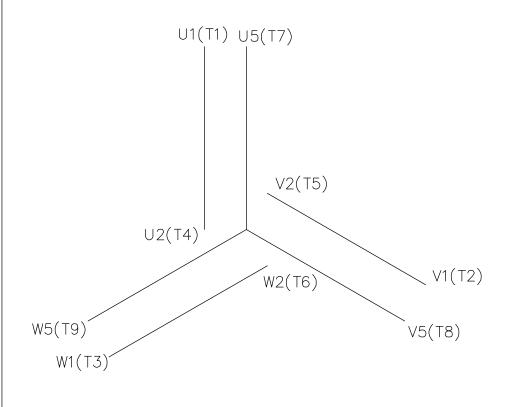

REF.	DECAL	(IEC) 080644
REF.	DECAL	(NEMA) 080446

IEC MARKINGS										
LOW	VOLTA	\GE		HIGH VOLTAGE						
W2 W1 U1 U1 U5 L1 V1	V2 W2 U2 V1 V5 L2 W	(V2) (W1) 1 1 _{W5} L3		U2 U5 V2 V5 W2 W5 W2 U2 V2 U1 V1 L2 W1 L3						
LINE VOLTAGE	L1	L2	L3	JOIN						
TERMINAL	U1	V1	W1	W2	U2	V2				
LOW	U1,U5	V1,V5	W1,W5		U2,V2,W2					
HIGH	U1	V1	W1	U2 , U5	V2,V5	W2,W5				
NEMA MARKINGS										
	VOLTA T4 T5 T6	\GE	T4	HIGH VOLTAGE T4 T7 T5 T8 T6 T9						
(W2)	U2	⟨V2⟩	W	2) (\(\sqrt{\sqrt{2}}\)					
L1 T7 T1	V1 2 T8 T2	W1) L3 T9 T3	<u>y</u> 3 L1	1) (T1 L2	V1 \ T2 L:	3 T3				
LINE VOLTAGE	L1	L2	L3							
TERMINAL	U1	V1	W1	W2	U2	V2				
LOW	T1, T7	T2, T8	T3, T9	9 T4,T5,						
HIGH	T1	T2	T3	T4, T7	T5, T8	T6, T9				
	LECTRI GEAR		DRAWN	MGM 12	2/3/02					

												· ·	,
					TOL UNLES	ERANCES S SPECIFIED		EL EL	LECTRIC MO	TORS	DRAWN	MGM 12/3	3/02
					DEC.	INCHES			GEARMOTO		снк		
					.X	±.1			AND DRIV	ÆS	APPD		
					.xx	±.01	TITLE EXTE	ERNAL WIRII	ng Diagra	M	SCALE	1=1	
					.xxx	±.005	3 PHASE — DL	JAL VOLTAC	GE — W/TE	RM BLOCK	REF	00537703	3
01	NEMA LV CONNECTION WAS INCORRECT RLW 8/4/03			.xxxx	±.0005	MAT'L. IEC/NEMA MARKINGS			FMF				
NO.	REVISION	BY	& DATE	СНК	ANG	±1/2°	FINISH T	HERMAL TRAN	NSFER		PREV		
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED				RFP			CAD FILE OC	0546501	SIZ	DRAWING NO).		REV.
				DIST			4		A	005	465-	-01	01

