


# TAPER-LOCK BUSHINGS

## Dimensions & Rating Table

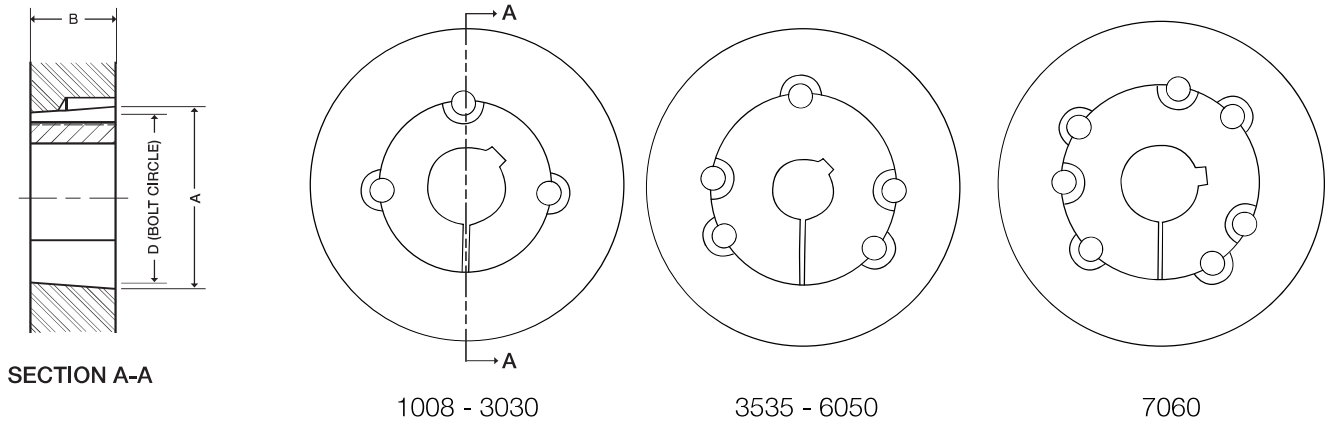

### Taper-Lock Bushings

Bushing Size	Torque Capacity (lb-in)	Bore Range (in)			Dimensions		Bolt Circle (in)	Mounting Screws	
		Min. Bore	Max Bore*		A	B		Qty.	Size
			Standard Keyseat	Shallow Keyseat					
1008	1,200	0.500	0.875	1.000	1.382	0.875	1.328	2	1/4x1/2
1108	1,300	0.500	1.000	1.125	1.507	0.875	1.453	2	1/4x1/2
1210	3,600	0.500	1.250	—	1.874	1.000	1.750	2	3/8x5/8
1215	3,550	0.500	1.250	—	1.874	1.500	1.750	2	3/8x5/8
1310	3,850	0.500	1.375	1.438	2.000	1.000	1.875	2	3/8x5/8
1610	4,300	0.500	1.500	1.688	2.249	1.000	2.125	2	3/8x5/8
1615	4,300	0.500	1.500	1.688	2.249	1.500	2.125	2	3/8x5/8
2012	7,150	0.500	1.875	2.125	2.749	1.250	2.625	2	7/16x7/8
2517	11,600	0.500	2.250	2.688	3.374	1.750	3.250	2	1/2x1
2525	11,300	0.750	2.250	2.500	3.374	2.500	3.250	2	1/2x1
3020	24,000	0.875	2.750	3.250	4.249	2.000	4.000	2	5/8x1-1/4
3030	24,000	0.938	2.750	3.250	4.249	3.000	4.000	2	5/8x1-1/4
3525	44,800	1.188	3.250	3.938	4.996	2.500	4.830	3	1/2x1-1/2
3535	44,800	1.188	3.250	3.938	4.996	3.500	4.830	3	1/2x1-1/2
4030	77,300	1.438	3.625	4.438	5.746	3.000	5.540	3	5/8x1-3/4
4040	77,300	1.438	3.625	4.438	5.746	4.000	5.540	3	5/8x1-3/4
4535	110,000	1.938	4.250	4.938	6.371	3.500	6.130	3	3/4x2
4545	110,000	1.938	4.250	4.938	6.371	4.500	6.130	3	3/4x2
5040	126,000	2.438	4.500	5.000	6.996	4.000	6.720	3	7/8x2-1/4
5050	126,000	2.438	4.500	5.000	6.996	5.000	6.720	3	7/8x2-1/4
6050	282,000	3.000	6.000	—	9.244	5.000	9.000	3	1-1/4x3-1/2
7060	416,000	3.000	7.000	—	10.244	6.000	10.000	4	1-1/4x3-1/2

\*Key is furnished with each bushing having a shallow keyseat.

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
<b>TL1008 BUSHINGS</b>			
TL100812	1/2	1/8 x 1/16	0.3
TL10089/16	9/16	1/8 x 1/16	0.3
TL100858	5/8	3/16 x 3/32	0.2
TL10081116	11/16	3/16 x 3/32	0.2
TL100834	3/4	3/16 x 3/32	0.2
TL10081316	13/16	3/16 x 3/32	0.2
TL100878	7/8	3/16 x 3/32	0.2
TL10081516	15/16	1/4 x 1/16	0.2
TL10081	1	1/4 x 1/16	0.2
<b>TL1108 BUSHINGS</b>			
TL110812	1/2	1/8 x 1/16	0.5
TL1108916	9/16	1/8 x 1/16	0.3
TL1108916	9/16	1/8 x 1/16	0.3
TL110858	5/8	3/16 x 3/32	0.5
TL11081116	11/16	3/16 x 3/32	0.3
TL110834	3/4	3/16 x 3/32	0.5
TL11081316	13/16	3/16 x 3/32	0.3
TL110878	7/8	3/16 x 3/32	0.5
TL11081516	15/16	1/4 x 1/8	0.2
TL11081	1	1/4 x 1/8	0.5
TL11081116	1-1/16	1/4 x 1/16	0.2
TL1108118	1-1/8	1/4 x 1/16	0.5
<b>TL1210 BUSHINGS</b>			
TL121012	1/2	1/8 x 1/16	0.6
TL12109/16	9/16	1/8 x 1/16	0.6
TL121058	5/8	3/16 x 3/32	0.6
TL121011/16	11/16	3/16 x 3/32	0.6
TL121034	3/4	3/16 x 3/32	0.6
TL121013/16	13/16	3/16 x 3/32	0.6
TL121078	7/8	3/16 x 3/32	0.6
TL121015/16	15/16	1/4 x 1/8	0.5
TL12101	1	1/4 x 1/8	0.5
TL12101116	1-1/16	1/4 x 1/8	0.5
TL1210118	1-1/8	1/4 x 1/8	0.5
TL12101316	1-3/16	1/4 x 1/8	0.5
TL1210114	1-1/4	1/4 x 1/8	0.5
<b>TL1215 BUSHINGS</b>			
TL121512	1/2	1/8 x 1/16	0.8
TL12159/16	9/16	1/8 x 1/16	0.8
TL121558	5/8	3/16 x 3/32	0.7
TL121511/16	11/16	3/16 x 3/32	0.7
TL121534	3/4	3/16 x 3/32	0.7
TL121513/16	13/16	3/16 x 3/32	0.7
TL121578	7/8	3/16 x 3/32	0.8
TL121515/16	15/16	1/4 x 1/8	0.6
TL12151	1	1/4 x 1/8	0.6
TL12151116	1-1/16	1/4 x 1/8	0.6
TL1215118	1-1/8	1/4 x 1/8	0.6
TL12151316	1-3/16	1/4 x 1/8	0.6
TL1215114	1-1/4	1/4 x 1/8	0.6

Part Number	Bore	Keyseat	Weight
<b>TL1310 BUSHINGS</b>			
TL131012	1/2	1/8 x 1/16	0.7
TL13109/16	9/16	1/8 x 1/16	0.7
TL131058	5/8	3/16 x 3/32	0.7
TL131011/16	11/16	3/16 x 3/32	0.7
TL131034	3/4	3/16 x 3/32	0.6
TL131013/16	13/16	3/16 x 3/32	0.6
TL131078	7/8	3/16 x 3/32	0.6
TL131015/16	15/16	1/4 x 1/8	0.6
TL13101	1	1/4 x 1/8	0.6
TL13101116	1-1/16	1/4 x 1/8	0.5
TL1310118	1-1/8	1/4 x 1/8	0.5
TL13101316	1-3/16	1/4 x 1/8	0.5
TL1310114	1-1/4	1/4 x 1/8	0.4
TL13101516	1-5/16	5/16 x 5/32	0.4
TL1310138	1-3/8	5/16 x 5/32	0.4
TL13101716	1-7/16	3/8 x 1/8	0.4
<b>TL1610 BUSHINGS</b>			
TL161012	1/2	1/8 x 1/16	0.9
TL16109/16	9/16	1/8 x 1/16	0.9
TL161058	5/8	3/16 x 3/32	0.8
TL161011/16	11/16	3/16 x 3/32	0.8
TL161034	3/4	3/16 x 3/32	0.8
TL161013/16	13/16	3/16 x 3/32	0.8
TL161078	7/8	3/16 x 3/32	0.8
TL161015/16	15/16	1/4 x 1/8	0.7
TL16101	1	1/4 x 1/8	0.7
TL16101116	1-1/16	1/4 x 1/8	0.7
TL1610118	1-1/8	1/4 x 1/8	0.7
TL16101316	1-3/16	1/4 x 1/8	0.7
TL1610114	1-1/4	1/4 x 1/8	0.7
TL16101516	1-5/16	5/16 x 5/32	0.7
TL1610138	1-3/8	5/16 x 5/32	0.7
TL16101716	1-7/16	3/8 x 3/16	0.6
TL1610112	1-1/2	3/8 x 3/16	0.6
TL16101916	1-9/16	3/8 x 1/8	0.5
TL1610158	1-5/8	3/8 x 1/8	0.5
TL161011116	1-11/16	3/8 x 1/8	0.5
<b>TL1615 BUSHINGS</b>			
TL161512	1/2	1/8 x 1/16	1.2
TL16159/16	9/16	1/8 x 1/16	1.3
TL161558	5/8	3/16 x 3/32	1.1
TL161511/16	11/16	3/16 x 3/32	1.1
TL161534	3/4	3/16 x 3/32	1.1
TL161513/16	13/16	3/16 x 3/32	1.2
TL161578	7/8	3/16 x 3/32	1.1
TL161515/16	15/16	1/4 x 1/8	1.0
TL16151	1	1/4 x 1/8	1.0
TL16151116	1-1/16	1/4 x 1/8	1.0
TL1615118	1-1/8	1/4 x 1/8	1.0
TL16151316	1-3/16	1/4 x 1/8	1.0
TL1615114	1-1/4	1/4 x 1/8	1.0
TL16151516	1-5/16	5/16 x 5/32	0.8
TL1615138	1-3/8	5/16 x 5/32	0.8
TL16151716	1-7/16	3/8 x 3/16	0.7
TL1615112	1-1/2	3/8 x 3/16	0.7
TL16151619	1-9/16	3/8 x 1/8	0.7
TL1615158	1-5/8	3/8 x 1/8	0.6
TL161511116	1-11/16	3/8 x 1/8	0.5

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
<b>TL2012 BUSHINGS</b>			
TL201212	1/2	1/8 x 1/16	1.7
TL20129/16	9/16	1/8 x 1/16	1.7
TL201258	5/8	3/16 x 3/32	1.6
TL201211/16	11/16	3/16 x 3/32	1.6
TL201234	3/4	3/16 x 3/32	1.6
TL201213/16	13/16	3/16 x 3/32	1.6
TL201278	7/8	3/16 x 3/32	1.6
TL201215/16	15/16	1/4 x 1/8	1.5
TL20121	1	1/4 x 1/8	1.5
TL20121116	1-1/16	1/4 x 1/8	1.4
TL2012118	1-1/8	1/4 x 1/8	1.5
TL20121316	1-3/16	1/4 x 1/8	1.5
TL2012114	1-1/4	1/4 x 1/8	1.5
TL20121516	1-5/16	5/16 x 5/32	1.4
TL2012138	1-3/8	5/16 x 5/32	1.4
TL20121716	1-7/16	3/8 x 3/16	1.2
TL2012112	1-1/2	3/8 x 3/16	1.2
TL20121916	1-9/16	3/8 x 3/16	1.2
TL2012158	1-5/8	3/8 x 3/16	1.2
TL201211116	1-11/16	3/8 x 3/16	1.2
TL2012134	1-3/4	3/8 x 3/16	1.2
TL201211316	1-13/16	1/2 x 1/4	1.0
TL2012178	1-7/8	1/2 x 1/4	1.0
TL201211516	1-15/16	1/2 x 3/16	1.0
TL2012122	2	1/2 x 3/16	1.0
TL2012218	2-1/8	1/2 x 3/16	0.8
<b>TL2517 BUSHINGS</b>			
TL251712	1/2	1/8 x 1/16	2.0
TL25179/16	9/16	1/8 x 1/16	3.4
TL251758	5/8	3/16 x 3/32	3.4
TL251711/16	11/16	3/16 x 3/32	3.4
TL251734	3/4	3/16 x 3/32	3.3
TL251713/16	13/16	3/16 x 3/32	3.3
TL251778	7/8	3/16 x 3/32	2.0
TL251715/16	15/16	1/4 x 1/8	3.3
TL25171	1	1/4 x 1/8	2.0
TL25171116	1-1/16	1/4 x 1/8	3.2
TL2517118	1-1/8	1/4 x 1/8	3.1
TL25171316	1-3/16	1/4 x 1/8	2.0
TL2517114	1-1/4	1/4 x 1/8	2.0
TL25171516	1-5/16	5/16 x 5/32	2.9
TL2517138	1-3/8	5/16 x 5/32	2.0
TL25171716	1-7/16	3/8 x 3/16	2.0
TL2517112	1-1/2	3/8 x 3/16	2.0
TL25171916	1-9/16	3/8 x 3/16	2.7
TL2517158	1-5/8	3/8 x 3/16	2.0
TL251711116	1-11/16	3/8 x 3/16	2.0
TL2517134	1-3/4	3/8 x 3/16	2.0
TL251711316	1-13/16	1/2 x 1/4	2.4
TL2517178	1-7/8	1/2 x 1/4	2.0
TL251711516	1-15/16	1/2 x 1/4	2.0
TL25172	2	1/2 x 1/4	2.0
TL25172116	2-1/16	1/2 x 1/4	2.3
TL2517218	2-1/8	1/2 x 1/4	2.0

Part Number	Bore	Keyseat	Weight
TL25172316	2-3/16	1/2 x 1/4	2
TL2517214	2-1/4	1/2 x 1/4	2
TL25172516	2-5/16	5/8 x 3/16	1.9
TL2517238	2-3/8	5/8 x 3/16	2
TL25172716	2-7/16	5/8 x 3/16	2
TL2517212	2-1/2	5/8 x 3/16	1.6
TL2517258	2-5/8	5/8 x 3/16	2
TL251721116	2-11/16	5/8 x 3/16	1.4
<b>TL2525 BUSHINGS</b>			
TL252534	3/4	3/16 x 3/32	4.9
TL252578	7/8	3/16 x 3/32	4.8
TL25251	1	1/4 x 1/8	4.7
TL2525118	1-1/8	1/4 x 1/8	4.6
TL25251316	1-3/16	1/4 x 1/8	4.5
TL2525114	1-1/4	1/4 x 1/8	4.4
TL2525138	1-3/8	5/16 x 5/32	4.2
TL25251716	1-7/16	3/8 x 3/16	4.2
TL2525112	1-1/2	3/8 x 3/16	4
TL2525158	1-5/8	3/8 x 3/16	3.9
TL252511116	1-11/16	3/8 x 3/16	3.8
TL2525134	1-3/4	3/8 x 3/16	3.7
TL252511316	1-13/16	1/2 x 1/4	3.5
TL2525178	1-7/8	1/2 x 1/4	3.4
TL252511516	1-15/16	1/2 x 1/4	3.3
TL25252	2	1/2 x 1/4	3.2
TL2525218	2-1/8	1/2 x 1/4	2.9
TL25252316	2-3/16	1/2 x 1/4	2.8
TL2525214	2-1/4	1/2 x 1/4	2.6
TL25252516	2-5/16	5/8 x 3/16	2.4
TL2525238	2-3/8	5/8 x 3/16	2.6
TL25252716	2-7/16	5/8 x 3/16	2.4
TL2525212	2-1/2	5/8 x 3/16	2.2
<b>TL3020 BUSHINGS</b>			
TL302078	7/8	3/16 x 3/32	6.2
TL302015/16	15/16	1/4 x 1/8	6.1
TL30201	1	1/4 x 1/8	6.1
TL3020118	1-1/8	1/4 x 1/8	5.9
TL30201316	1-3/16	1/4 x 1/8	6
TL3020114	1-1/4	1/4 x 1/8	5.9
TL30201516	1-5/16	5/16 x 5/32	5.8
TL3020138	1-3/8	5/16 x 5/32	6.1
TL30201716	1-7/16	3/8 x 3/16	5.7
TL3020112	1-1/2	3/8 x 3/16	6
TL30201916	1-9/16	3/8 x 3/16	5.5
TL3020158	1-5/8	3/8 x 3/16	5.5
TL302011116	1-11/16	3/8 x 3/16	5.4
TL3020134	1-3/4	3/8 x 3/16	5.3
TL302011316	1-13/16	1/2 x 1/4	5.4
TL3020178	1-7/8	1/2 x 1/4	5.1
TL302011516	1-15/16	1/2 x 1/4	5
TL30202	2	1/2 x 1/4	5.3
TL30202116	2-1/16	1/2 x 1/4	4.8
TL3020218	2-1/8	1/2 x 1/4	5
TL30202316	2-3/16	1/2 x 1/4	4.9

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
TL3020214	2-1/4	1/2 x 1/4	4.8
TL30202516	2-5/16	5/8 x 5/16	5.4
TL3020238	2-3/8	5/8 x 5/16	4
TL30202716	2-7/16	5/8 x 5/16	4.4
TL3020212	2-1/2	5/8 x 5/16	4.1
TL3020258	2-5/8	5/8 x 5/16	3.8
TL302021116	2-11/16	5/8 x 5/16	3.7
TL3020234	2-3/4	5/8 x 5/16	5
TL302021316	2-13/16	3/4 x 1/4	3.7
TL3020278	2-7/8	3/4 x 1/4	3.8
TL302021516	2-15/16	3/4 x 1/4	3.4
TL30203	3	3/4 x 1/4	3.4
TL3020318	3-1/8	3/4 x 1/4	3.4
TL30203316	3-3/16	3/4 x 1/4	3.1
TL3020314	3-1/4	3/4 x 1/4	3
<b>TL3030 BUSHINGS</b>			
TL303015/16	15/16	1/4 x 1/8	10
TL30301	1	1/4 x 1/8	9.4
TL3030118	1-1/8	1/4 x 1/8	9.4
TL30301316	1-3/16	1/4 x 1/8	9.2
TL3030114	1-1/4	1/4 x 1/8	9
TL30301516	1-5/16	5/16 x 5/32	8.9
TL3030138	1-3/8	5/16 x 5/32	8.8
TL30301716	1-7/16	3/8 x 3/16	8.6
TL3030112	1-1/2	3/8 x 3/16	8.5
TL30301916	1-9/16	3/8 x 3/16	8.4
TL3030158	1-5/8	3/8 x 3/16	8.2
TL303011116	1-11/16	3/8 x 3/16	8
TL3030134	1-3/4	3/8 x 3/16	7.8
TL303011316	1-13/16	1/2 x 1/4	7.6
TL3030178	1-7/8	1/2 x 1/4	7.5
TL303011516	1-15/16	1/2 x 1/4	7.4
TL30302	2	1/2 x 1/4	6.2
TL30302116	2-1/16	1/2 x 1/4	7.2
TL3030218	2-1/8	1/2 x 1/4	7.1
TL30302316	2-3/16	1/2 x 1/4	6.9
TL3030214	2-1/4	1/2 x 1/4	6.7
TL30302516	2-5/16	5/8 x 5/16	6.6
TL3030238	2-3/8	5/8 x 5/16	6.2
TL30302716	2-7/16	5/8 x 5/16	6.2
TL3030212	2-1/2	5/8 x 5/16	6.1
TL3030258	2-5/8	5/8 x 5/16	6.2
TL303021116	2-11/16	5/8 x 5/16	5.9
TL3030234	2-3/4	5/8 x 5/16	6.2
TL303021316	2-13/16	3/4 x 1/4	5.4
TL3030278	2-7/8	3/4 x 1/4	5.3
TL303021516	2-15/16	3/4 x 1/4	5
TL30303	3	3/4 x 1/4	4.9
TL3030318	3-1/8	3/4 x 1/4	4.7
TL30303316	3-3/16	3/4 x 1/4	4.7
TL3030314	3-1/4	3/4 x 1/4	4.7
<b>TL3525 BUSHINGS</b>			
TL35251316	1-3/16	1/4 x 1/8	16
TL3525114	1-1/4	1/4 x 1/8	14.6

Part Number	Bore	Keyseat	Weight
TL35251516	1-5/16	5/16 x 5/32	14.6
TL3525138	1-3/8	5/16 x 5/32	14.3
TL35251716	1-7/16	3/8 x 3/16	14.1
TL3525112	1-1/2	3/8 x 3/16	14
TL35251916	1-9/16	3/8 x 3/16	14
TL3525158	1-5/8	3/8 x 3/16	13.9
TL352511116	1-11/16	3/8 x 3/16	13.9
TL3525134	1-3/4	3/8 x 3/16	13.4
TL352511316	1-13/16	1/2 x 1/4	13.3
TL3525178	1-7/8	1/2 x 1/4	13.2
TL352511516	1-15/16	1/2 x 1/4	13
TL35252	2	1/2 x 1/4	13
TL35252116	2-1/16	1/2 x 1/4	12.9
TL3525218	2-1/8	1/2 x 1/4	12.6
TL35252316	2-3/16	1/2 x 1/4	12.4
TL3525214	2-1/4	1/2 x 1/4	12.3
TL35252516	2-5/16	5/8 x 5/16	11.8
TL3525238	2-3/8	5/8 x 5/16	12
TL35252716	2-7/16	5/8 x 5/16	11.7
TL3525212	2-1/2	5/8 x 5/16	11.5
TL35252916	2-9/16	5/8 x 5/16	11.3
TL3525258	2-5/8	5/8 x 5/16	11.1
TL352521116	2-11/16	5/8 x 5/16	10.7
TL3525234	2-3/4	5/8 x 5/16	10.4
TL352521316	2-13/16	3/4 x 3/8	10.3
TL3525278	2-7/8	3/4 x 3/8	10.1
TL352521516	2-15/16	3/4 x 3/8	10.5
TL35253	3	3/4 x 3/8	9.5
TL35253116	3-1/16	3/4 x 3/8	9.4
TL3525318	3-1/8	3/4 x 3/8	9.3
TL35253316	3-3/16	3/4 x 3/8	8.6
TL3525314	3-1/4	3/4 x 3/8	8.8
TL35253516	3/5/16	7/8 x 1/4	8.7
TL3525338	3/3/8	7/8 x 1/4	8.5
TL35253716	3-7/16	7/8 x 1/4	8.2
TL3525312	3-1/2	7/8 x 1/4	8
TL35253916	3-9/16	7/8 x 1/4	8
TL3525358	3-5/8	7/8 x 1/4	7.9
TL352531316	3-13/16	7/8 x 1/4	7.9
TL352531116	3-11/16	7/8 x 1/4	7.9
TL3525334	3-3/4	7/8 x 1/4	7.9
TL3525378	3-7/8	1 x 1/4	7.9
TL352531516	3-15/16	1 x 1/4	7.9
<b>TL3535 BUSHINGS</b>			
TL35351316	1-3/16	1/4 x 1/8	9.3
TL3535114	1-1/4	1/4 x 1/8	14.9
TL3535138	1-3/8	5/16 x 5/32	15.4
TL35351716	1-7/16	3/8 x 3/16	15.4
TL3535112	1-1/2	3/8 x 3/16	14.6
TL3535158	1-5/8	3/8 x 3/16	14.2
TL353511116	1-11/16	3/8 x 3/16	14.1
TL3535134	1-3/4	3/8 x 3/16	14.1
TL3535178	1-7/8	1/2 x 1/4	13.6
TL353511516	1-15/16	1/2 x 1/4	13.4

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
TL35352	2	1/2 x 1/4	13.3
TL3535218	2-1/8	1/2 x 1/4	12.8
TL35352316	2-3/16	1/2 x 1/4	12.8
TL3535214	2-1/4	1/2 x 1/4	12.4
TL35352516	2-5/16	5/8 x 5/16	12.4
TL3535238	2-3/8	5/8 x 5/16	12
TL35352716	2-7/16	5/8 x 5/16	12
TL3535212	2-1/2	5/8 x 5/16	11.7
TL3535258	2-5/8	5/8 x 5/16	11.1
TL353521116	2-11/16	5/8 x 5/16	10.9
TL3535234	2-3/4	5/8 x 5/16	10.7
TL3535278	2-7/8	3/4 x 3/8	10
TL353521516	2-15/16	3/4 x 3/8	10
TL35353	3	3/4 x 3/8	9.7
TL3535318	3-1/8	3/4 x 3/8	9.2
TL35353316	3-3/16	3/4 x 3/8	8.8
TL3535314	3-1/4	3/4 x 3/8	8.6
TL35353516	3-5/16	7/8 x 1/4	9
TL3535338	3-3/8	7/8 x 1/4	8.6
TL35353716	3-7/16	7/8 x 1/4	8
TL3535312	3-1/2	7/8 x 1/4	8.1
TL3535358	35/8	7/8 x 1/4	7.3
TL353531116	3-11/16	7/8 x 1/4	7
TL3535334	3-3/4	7/8 x 1/4	6.7
TL3535378	3-7/8	1 x 1/4	6
TL353531516	3-15/16	1 x 1/4	5.8
<b>TL4030 BUSHINGS</b>			
TL40301716	1-7/16	3/8 x 3/16	24
TL4030112	1-1/2	3/8 x 3/16	22
TL40301916	1-9/16	3/8 x 3/16	21.9
TL4030158	1-5/8	3/8 x 3/16	21.8
TL403011116	1-11/16	3/8 x 3/16	21.5
TL4030134	1-3/4	3/8 x 3/16	21.2
TL403011316	1-13/16	1/2 x 1/4	21
TL4030178	1-7/8	1/2 x 1/4	20.9
TL403011516	1-15/16	1/2 x 1/4	20.7
TL40302	2	1/2 x 1/4	20.6
TL40302116	2-1/16	1/2 x 1/4	20.6
TL4030218	2-1/8	1/2 x 1/4	20.7
TL40302316	2-3/16	1/2 x 1/4	20.4
TL4030214	2-1/4	1/2 x 1/4	20.1
TL40302516	2-5/16	5/8 x 5/16	20
TL4030238	2-3/8	5/8 x 5/16	19.5
TL40302716	2-7/16	5/8 x 5/16	19.3
TL4030212	2-1/2	5/8 x 5/16	19.2
TL40302916	2-9/16	5/8 x 5/16	19.1
TL4030258	2-5/8	5/8 x 5/16	19
TL403021116	2-11/16	5/8 x 5/16	18.4
TL4030234	2-3/4	5/8 x 5/16	17.7
TL403021316	2-13/16	3/4 x 3/8	17.5
TL4030278	2-7/8	3/4 x 3/8	17.2
TL403021516	2-15/16	3/4 x 3/8	17.2
TL40303	3	3/4 x 3/8	17
TL40303116	3-1/16	3/4 x 3/8	16.8
TL4030318	3-1/8	3/4 x 3/8	16.5

Part Number	Bore	Keyseat	Weight
TL40303316	3-3/16	3/4 x 3/8	15.9
TL4030314	3-1/4	3/4 x 3/8	15.4
TL40303516	3-5/16	3/4 x 3/8	14.9
TL4030338	3-3/8	7/8 x 7/16	14.6
TL40303716	3-7/16	7/8 x 7/16	14.1
TL4030312	3-1/2	7/8 x 7/16	13.7
TL40303916	3-9/16	7/8 x 7/16	13.4
TL4030358	3-5/8	7/8 x 7/16	13.1
TL403031116	3-11/16	7/8 x 1/4	13
TL4030334	3-3/4	7/8 x 1/4	12.7
TL4030378	3-7/8	1 x 1/4	12.9
TL403031516	3-15/16	1 x 1/4	12.6
TL40304	4	1 x 1/4	13
TL4030418	4-1/8	1 x 1/4	12.8
TL40304316	4-3/16	1 x 1/4	12.6
TL4030414	4-1/4	1 x 1/4	12.4
TL4030438	4-3/8	1 x 1/4	12.2
TL40304716	4-7/16	1 x 1/4	12
<b>TL4040 BUSHINGS</b>			
TL40401716	1-7/16	3/8 x 3/16	22.6
TL4040112	1-1/2	3/8 x 3/16	22.9
TL4040158	1-5/8	3/8 x 3/16	22.1
TL404011116	1-11/16	3/8 x 3/16	22.9
TL4040134	1-3/4	3/8 x 3/16	21.8
TL4040178	1-7/8	1/2 x 1/4	21.4
TL404011516	1-15/16	1/2 x 1/4	22.9
TL40402	2	1/2 x 1/4	20.7
TL4040218	2-1/8	1/2 x 1/4	20.6
TL40402316	2-3/16	1/2 x 1/4	20.2
TL4040214	2-1/4	1/2 x 1/4	20.2
TL4040238	2-3/8	5/8 x 5/16	19.6
TL40402716	2-7/16	5/8 x 5/16	19.3
TL4040212	2-1/2	5/8 x 5/16	15
TL4040258	2-5/8	5/8 x 5/16	18.7
TL404021116	2-11/16	5/8 x 5/16	18.3
TL4040234	2-3/4	5/8 x 5/16	18.2
TL4040278	2-7/8	3/4 x 3/8	15
TL404021516	2-15/16	3/4 x 3/8	15
TL40403	3	3/4 x 3/8	16.8
TL4040318	3-1/8	3/4 x 3/8	16.2
TL40403316	3-3/16	3/4 x 3/8	15.8
TL4040314	3-1/4	3/4 x 3/8	15.5
TL4040338	3-3/8	7/8 x 7/16	17
TL40403716	3-7/16	7/8 x 7/16	14.4
TL4040312	3-1/2	7/8 x 7/16	17
TL4040358	3-5/8	7/8 x 7/16	12.5
TL404031116	3-11/16	7/8 x 1/4	13.5
TL4040334	3-3/4	7/8 x 1/4	13.5
TL4040378	3-7/8	1 x 1/4	15
TL404031516	3-15/16	1 x 1/4	12.5
TL40404	4	1 x 1/4	12.1
TL4040418	4-1/8	1 x 1/4	11.2
TL40404316	4-3/16	1 x 1/4	10.7
TL4040414	4-1/4	1 x 1/4	10.3
TL4040438	4-3/8	1 x 1/4	9.5

# TAPER-LOCK BUSHINGS

## Bore and Keyseat Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
TL40404716	4-7/16	1 x 1/4	8.9
<b>TL4535 BUSHINGS</b>			
TL453511516	1-15/16	1/2 x 1/4	31
TL45352	2	1/2 x 1/4	29.7
TL45352116	2-1/16	1/2 x 1/4	29.5
TL4535218	2-1/8	1/2 x 1/4	29.3
TL45352316	2-3/16	1/2 x 1/4	29
TL4535214	2-1/4	1/2 x 1/4	28.8
TL45352516	2-5/16	5/8 x 5/16	28.6
TL4535238	2-3/8	5/8 x 5/16	28.4
TL45352716	2-7/16	5/8 x 5/16	28
TL4535212	2-1/2	5/8 x 5/16	26.7
TL45352916	2-9/16	5/8 x 5/16	26.3
TL4535258	2-5/8	5/8 x 5/16	25.9
TL453521116	2-11/16	5/8 x 5/16	25.4
TL4535234	2-3/4	5/8 x 5/16	25
TL453521316	2-13/16	3/4 x 3/8	24.9
TL4535278	2-7/8	3/4 x 3/8	24.8
TL453521516	2-15/16	3/4 x 3/8	24.1
TL45353	3	3/4 x 3/8	24.2
TL45353116	3-1/16	3/4 x 3/8	24.2
TL4535318	3-1/8	3/4 x 3/8	24.1
TL45353316	3-3/16	3/4 x 3/8	23.8
TL4535314	3-1/4	3/4 x 3/8	23.1
TL45353516	3-5/16	7/8 x 7/16	22.7
TL4535338	3-3/8	7/8 x 7/16	22.4
TL45353716	3-7/16	7/8 x 7/16	21.5
TL4535312	3-1/2	7/8 x 7/16	21.3
TL45353916	3-9/16	7/8 x 7/16	21.2
TL4535358	3-5/8	7/8 x 7/16	21
TL453531316	3-11/16	7/8 x 7/16	20.7
TL453531116	3-11/16	7/8 x 7/16	20.3
TL4535334	3-3/4	7/8 x 7/16	19.9
TL4535378	3-7/8	1 x 1/2	19.3
TL453531516	3-15/16	1 x 1/2	18.9
TL45354	4	1 x 1/2	18.7
TL4535418	4-1/8	1 x 1/2	18.6
TL45354316	4-3/16	1 x 1/2	18.5
TL4535414	4-1/4	1 x 1/2	17.8
TL4535438	4-3/8	1 x 1/4	16.8
TL45354716	4-7/16	1 x 1/4	15.4
TL4535412	4-1/2	1 x 1/4	15.3
TL4535434	4-3/4	11/4 x 1/4	15.2
TL4535478	4-7/8	11/4 x 1/4	15.1
TL453541516	4-15/16	11/4 x 1/4	14.9
<b>TL4545 BUSHINGS</b>			
TL454511516	1-15/16	1/2 x 1/4	29.9
TL45452	2	1/2 x 1/4	29.8
TL45452316	2-3/16	1/2 x 1/4	29.1
TL4545238	2-3/8	5/8 x 5/16	27.2
TL45452716	2-7/16	5/8 x 5/16	27.1
TL4545258	2-5/8	5/8 x 5/16	26.7
TL4545234	2-3/4	5/8 x 5/16	26.5
TL4545278	2-7/8	3/4 x 3/8	20.3
TL454521516	2-15/16	3/4 x 3/8	25.3

Part Number	Bore	Keyseat	Weight
TL45453	3	3/4 x 3/8	20
TL4545318	3-1/8	3/4 x 3/8	19.7
TL45453316	3-3/16	3/4 x 3/8	19.6
TL4545314	3-1/4	3/4 x 3/8	19.4
TL4545338	3-3/8	7/8 x 7/16	20
TL45453716	3-7/16	7/8 x 7/16	19.9
TL4545312	3-1/2	7/8 x 7/16	19.7
TL4545358	3-5/8	7/8 x 7/16	20.2
TL4545334	3-3/4	7/8 x 7/16	19
TL4545378	3-7/8	1 x 1/2	23.8
TL454531516	3-15/16	1 x 1/2	20
TL45454	4	1 x 1/2	23.4
TL4545418	4-1/8	1 x 1/2	23.1
TL45454316	4-3/16	1 x 1/2	22.9
TL4545414	4-1/4	1 x 1/2	22.7
TL4545438	4-3/8	1 x 1/4	22.3
TL45454716	4-7/16	1 x 1/4	22.1
TL4545412	4-1/2	1 x 1/4	21.9
TL4545434	4-3/4	1-1/4 x 1/4	21
TL4545478	4-7/8	1-1/4 x 1/4	20.6
TL454541516	4-15/16	1-1/4 x 1/4	20.4
<b>TL5040 BUSHINGS</b>			
TL50402716	2-7/16	5/8 x 5/16	39.5
TL5040212	2-1/2	5/8 x 5/16	38.4
TL50402916	2-9/16	5/8 x 5/16	37.8
TL5040258	2-5/8	5/8 x 5/16	37.1
TL504021116	2-11/16	5/8 x 5/16	36.9
TL5040234	2-3/4	5/8 x 5/16	36.6
TL504021316	2-13/16	3/4 x 3/8	36.5
TL5040278	2-7/8	3/4 x 3/8	36.4
TL504021516	2-15/16	3/4 x 3/8	36.2
TL50403	3	3/4 x 3/8	35.6
TL50403116	3-1/16	3/4 x 3/8	35.1
TL5040318	3-1/8	3/4 x 3/8	34.8
TL50403316	3-3/16	3/4 x 3/8	33.9
TL5040314	3-1/4	3/4 x 3/8	33.2
TL50403516	3-5/16	7/8 x 7/16	33
TL5040338	3-3/8	7/8 x 7/16	32.7
TL50403716	3-7/16	7/8 x 7/16	32
TL5040312	3-1/2	7/8 x 7/16	31.7
TL50403916	3-9/16	7/8 x 7/16	31.4
TL5040358	3-5/8	7/8 x 7/16	31.1
TL504031316	3-13/16	7/8 x 7/16	30.8
TL504031116	3-11/16	7/8 x 7/16	30.4
TL5040334	3-3/4	7/8 x 7/16	29.7
TL5040378	3-7/8	1 x 1/2	39
TL504031516	3-15/16	1 x 1/2	28.7
TL50404	4	1 x 1/2	27.8
TL5040418	4-1/8	1 x 1/2	27.5
TL50404316	4-3/16	1 x 1/2	27.2
TL5040414	4-1/4	1 x 1/2	27
TL5040438	4-3/8	1 x 1/2	26
TL50404716	4-7/16	1 x 1/2	25.1
TL5040412	4-1/2	1 x 1/2	23.6
TL5040434	4-3/4	1-1/4 x 1/4	22.9

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Inch Bores

Part Number	Bore	Keyseat	Weight
TL5040478	4-7/8	1-1/4 x 1/4	22.2
TL504041516	4-15/16	1-1/4 x 1/4	20.6
TL50405	5	1-1/4 x 1/4	20.5
<b>TL5050 BUSHINGS</b>			
TL50502716	2-7/16	5/8 x 5/16	39
TL505021116	2-11/16	5/8 x 5/16	37.4
TL505021516	2-15/16	3/4 x 3/8	36
TL5050338	3-3/8	7/8 x 7/16	33
TL50503716	3-7/16	7/8 x 7/16	32.6
TL5050358	3-5/8	7/8 x 7/16	31.2
TL5050378	3-7/8	1 x 1/2	28
TL505031516	3-15/16	1 x 1/2	28.6
TL50504	4	1 x 1/2	22.2
TL5050414	4-1/4	1 x 1/2	26
TL5050438	4-3/8	1 x 1/2	25
TL50504716	4-7/16	1 x 1/2	26
TL5050412	4-1/2	1 x 1/2	26
TL5050478	4-7/8	1-1/4 x 7/16	22.3
TL505041516	4-15/16	1-1/4 x 7/16	21.4
TL50505	5	1-1/4 x 7/16	36
<b>TL6050 BUSHINGS</b>			
TL60503	3	3/4 x 3/8	65
TL6050314	3-1/4	3/4 x 3/8	65
TL60503716	3-7/16	7/8 x 7/16	65
TL60504	4	1 x 1/2	65
TL60504716	4-7/16	1 x 1/2	64.2
TL605041516	4-15/16	1-1/4 x 5/8	52
TL60505716	5-7/16	1-1/4 x 5/8	46
TL605051516	5-15/16	1-1/2 x 3/4	47.2
TL60506	6	1-1/2 x 3/4	52
<b>TL7060 BUSHINGS</b>			
TL70603	3	3/4 x 3/8	95
TL7060314	3-1/4	3/4 x 3/8	95
TL70603716	3-7/16	7/8 x 7/16	95
TL706041516	4-15/16	1-1/4 x 5/8	91.9
TL70605716	5-7/16	1-1/4 x 5/8	84.5
TL706051516	5-15/16	1-1/2 x 3/4	78.2
TL70606	6	1-1/2 x 3/4	76.6
TL70606716	6-7/16	1-1/2 x 3/4	69
TL7060612	6-1/2	1-1/2 x 3/4	68.6
TL706061516	6-15/16	1-3/4 x 7/8	61
TL70607	7	1-3/4 x 7/8	60.6

# TAPER-LOCK BUSHINGS

## Bushing Bore & Keyway Information

### Metric Bores


Part Number	Bore	Keyseat	Weight
<b>TL1008 BUSHINGS</b>			
TL100814MM	14MM	5 X 5	0.3
TL100816MM	16MM	5 X 5	0.2
TL100818MM	18MM	6 X 6	0.2
TL100819MM	19MM	6 X 6	0.2
TL100820MM	20MM	6 X 6	0.2
TL100822MM	22MM	6 X 6	0.2
TL100824MM	24MM	8 X 7	0.2
<b>TL1108 BUSHINGS</b>			
TL110816MM	16MM	5 X 5	0.3
TL110818MM	18MM	6 X 6	0.3
TL110819MM	19MM	6 X 6	0.3
TL110820MM	20MM	6 X 6	0.3
TL110822MM	22MM	6 X 6	0.2
TL110824MM	24MM	8 X 7	0.3
TL110825MM	25MM	8 X 7	0.2
<b>TL1210 BUSHINGS</b>			
TL121014MM	14MM	5 X 5	0.6
TL121016MM	16MM	6 X 6	0.6
TL121018MM	18MM	6 X 6	0.6
TL121019MM	19MM	6 X 6	0.5
TL121020MM	20MM	6 X 6	0.5
TL121024MM	24MM	8 X 7	0.5
TL121025MM	25MM	8 X 7	0.6
TL121028MM	28MM	8 X 7	0.4
TL121030MM	30MM	8 X 7	0.4
<b>TL1610 BUSHINGS</b>			
TL161019MM	19MM	6 X 6	0.8
TL161020MM	20MM	6 X 6	0.7
TL161022MM	22MM	6 X 6	0.7
TL161024MM	24MM	8 X 7	0.8
TL161025MM	25MM	8 X 7	0.7
TL161028MM	28MM	8 X 7	0.7
TL161030MM	30MM	8 X 7	0.7
TL161032MM	32MM	10 X 8	0.6
TL161035MM	35MM	10 X 8	0.6
TL161038MM	38MM	10 X 8	0.5
TL161040MM	40MM	12 X 8	0.4
<b>TL2012 BUSHINGS</b>			
TL201214MM	14MM	5 X 5	1.7
TL201216MM	16MM	5 X 5	1.7
TL201218MM	18MM	6 X 6	1.6
TL201219MM	19MM	6 X 6	1.6
TL201220MM	20MM	6 X 6	1.6
TL201222MM	22MM	6 X 6	1.6
TL201224MM	24MM	8 X 7	1.5
TL201225MM	25MM	8 X 7	1.5
TL201228MM	28MM	8 X 7	1.5
TL201230MM	30MM	8 X 7	1.4
TL201232MM	32MM	10 X 8	1.5
TL201235MM	35MM	10 X 8	1.3
TL201238MM	38MM	10 X 8	1.3
TL201240MM	40MM	12 X 8	1.2
TL201242MM	42MM	12 X 8	1.5
TL201245MM	45MM	14 X 9	1.2

Part Number	Bore	Keyseat	Weight
<b>TL2517 BUSHINGS</b>			
TL251714MM	14MM	5 X 5	3.6
TL251716MM	16MM	5 X 5	3.6
TL251718MM	18MM	6 X 6	3.5
TL251720MM	20MM	6 X 6	3.4
TL251722MM	22MM	6 X 6	3.3
TL251724MM	24MM	8 X 7	3.3
TL251725MM	25MM	8 X 7	3.2
TL251728MM	28MM	8 X 7	3.1
TL251730MM	30MM	8 X 7	3.1
TL251732MM	32MM	10 X 8	3.0
TL251735MM	35MM	10 X 8	2.9
TL251738MM	38MM	10 X 8	2.9
TL251740MM	40MM	12 X 8	2.7
TL251742MM	42MM	12 X 8	2.0
TL251745MM	45MM	14 X 9	2.5
TL251748MM	48MM	14 X 9	2.0
TL251750MM	50MM	14 X 9	2.3
TL251755MM	55MM	16 X 10	2.0
TL251760MM	60MM	18 X 11	1.6
<b>TL3020 BUSHINGS</b>			
TL302024MM	24MM	8 X 7	6.1
TL302025MM	25MM	8 X 7	6.3
TL302028MM	28MM	8 X 7	6.0
TL302040MM	40MM	12 X 8	5.5
TL302045MM	45MM	14 X 9	5.3
TL302048MM	48MM	14 X 9	5.1
TL302050MM	50MM	14 X 9	5.0
TL302055MM	55MM	16 X 10	4.7
TL302060MM	60MM	18 X 11	4.4
TL302065MM	65MM	18 X 11	4.0




# TAPER-LOCK BUSHINGS

## Taper-Lock Bushing Installation & Removal

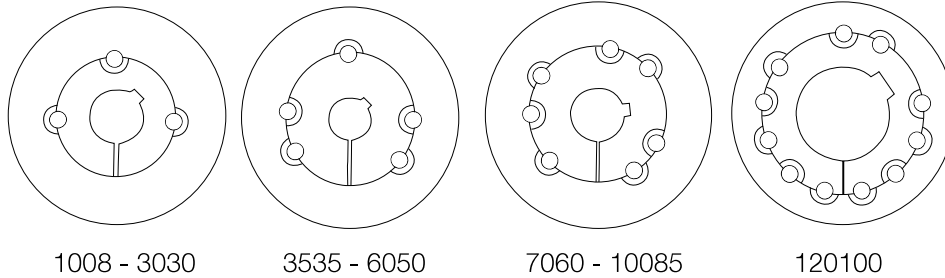


### To Install Taper-Lock™ Bushings:

1. Clean shaft, bore and outside of bushing, and bore of hub (taking bushings from hub if already assembled). Remove any oil, grease and dirt.
2. Place hub onto shaft. Slip bushing onto shaft and into hub. Oil threads and points of setscrews or threads and under heads of capscrews. DO NOT lubricate the hub bore or the outside of the bushing. Place screws loosely in holes that are threaded on hub side (shown as  on diagram above).
3. Locate assembly in desired position and tighten screws slightly to seat bushing in hub.
4. Tighten screws alternately and evenly to the fastener torque. Do not overtorque. Using a hammer and drift, hammer against large end of bushing. Hammer first beside the screw farthest from the bushing split and then hammer on the bushing on the opposite side of the screw. Avoid hammering close to the OD of the bushing to prevent damage.

Working towards the split, hammer on the bushing on each side of the setscrews. Then hammer on each side of the bushing split. Make sure that the surfaces on both sides of the split are even. Screws can now be tightened to fastener torque. Repeat sequence, hammering and retightening until the specified fastener torque no longer turns the screws after hammering.

### To Remove

1. Remove all screws. Oil threads and points of set screws or threads and under heads of cap screws.
2. Insert screws into holes that are threaded on the bushing side (shown as  on diagram). In sizes where washers are found under the screw heads, be sure to use the washers. Note that one screw in each hub is left over and is not used in the loosening operation.
3. Tighten screws alternately until bushing is loosened in hub. If bushing does not loosen, tap on face of hub.

**WARNING: Use NO lubricants on the bushing body or hub bore**

### Bushing Installation

Bushing Size	Bolts		Fastener Torque	
	Qty.	Size	lb-ft	lb-in
1008-1108	2	1/4-20 Setscrew	4.6	55
1210-1215-1310-1610-1615	2	3/8-16 Setscrew	15	175
2012	2	7/16-14 Setscrew	23	280
2517-2525	2	1/2-13 Setscrew	36	430
3020-3030	2	5/8-11 Setscrew	67	800
3525-3535	3	1/2-13 Setscrew	83	1000
4030-4040	3	5/8-11 Capscrew	142	1700
4535-4545	3	3/4-10 Capscrew	204	2450
5040-5050	3	7/8-9 Capscrew	258	3100
6050	3	1-1/4-7 Capscrew	650	7820
7060-8065	4	1-1/4-7 Capscrew	650	7820
10085	4	1-1/2-6 Capscrew	1140	13680
120100	6	1-1/2-6 Capscrew	1140	13680

Caution: Excessive bolt torque can cause hub and/or bushing breakage.

Note: To insure proper bushing/hub performance, full bushing contact on the shaft is recommended.