



## GFNT2-HGW

SmartlockPro GFCI Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Wallplate Included, Power Indication, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

### Technical Information

AC Horsepower Ratings

**At Rated Voltage:** 1 HP

Electrical Specifications

**Amperage:** 20 A

**Grounding:** Self-Grounding

**Pole:** 2

**Short Circuit Current Rating:** 10kA

**Voltage:** 125 VAC

**Wire:** 3

Environmental Specifications

**Flammability:** Rated V-0 per UL 94

**Operating Temperature:** -35C to +66C

Material Specifications

**Body Material:** Polycarbonate

**Face Material:** PBT

**Ground Clips:** Brass

**Grounding Screw:** Plated Steel

**Line Contacts:** Brass

**Strap Material:** Galvanized Steel

**Terminal Clamp:** Brass

**Terminal Screws:** Plated Steel

Mechanical Specifications

**Product ID:** Ratings are permanently marked on device

**Terminal Accom.:** 14-10 AWG solid or stranded

**Terminal ID:** Brass-Hot, Green-Ground, Silver-Neutral

**Termination:** Back and Side Wire

Product Features

**Brand:** SmartlockPro

**Color:** White

**Device Type:** Duplex Receptacle Outlet

**Feature:** Wallplate Included, Power Indication

**Function:** GFCI

**Grade:** Extra Heavy-Duty Hospital Grade

**NEMA:** 5-20R

Standards and Certifications

**ANSI:** C-73

**Applicable Standards:** UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

**Certification/Listing:** UL, CSA, NOM-ANCE

**NEMA:** WD-1 & WD-6

Warranty

**Warranty:** 2-Year Limited

**UPC Code:** 078477725061

**Country Of Origin:** China


**NEMA:**  
5-20R



### Patents\*

CA2341552	MX308495
CA2358721	MX315596
CA2425810	US7697252
CA2427366	US7737809
CA2515035	US8004804
MX234458	US8547126
MX251584	US8587914
MX269232	US8599522
MX276411	US9053886
MX276626	US9077091
MX302458	

\*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

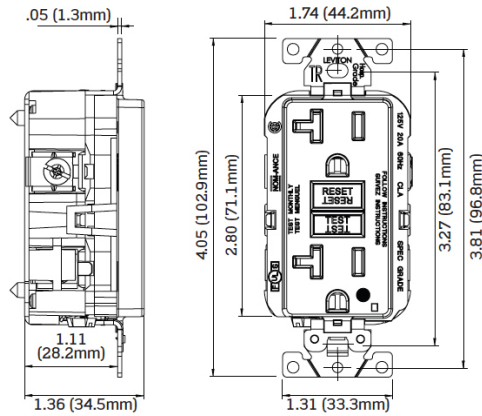

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/> JOB NUMBER: <input type="text"/>	CATALOG NUMBERS: <input type="text"/> <input type="text"/>
--	--

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747  
 Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):  
 +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
 FAX: +1-800-824-3005 · www.leviton.com/canada

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-  
 1797 · www.leviton.com.mx

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

