

## D-SUB sleeve housings - CUC-DST-GZNI-S/DSSC9 - 1419722

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: straight, size of housing: 1, color: Bare metallic

### Your advantages

- Easy to mount thanks to pre-assembled locking screws
- Antimagnetic metal sleeve housing
- Well-suited for harsh industrial conditions thanks to its metal design
- Particularly suitable for D-SUB connectors with special contacts thanks to large interior

### Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626188010

### Technical data

#### Mechanical characteristics

External cable diameter	3 mm ... 9.5 mm (Without bending protection)
Cable outlet	straight
Color	Bare metallic
Mounting type	Screw locking
Screw thread	4-40 UNC
Degree of protection	IP20
Type	D-SUB 9
Size of housing	1
No. of cable outlets	1

#### Ambient conditions

Ambient temperature (operation)	-35 °C ... 100 °C
---------------------------------	-------------------

# D-SUB sleeve housings - CUC-DST-GZNI-S/DSSC9 - 1419722

## Technical data

### Material data

Flammability rating according to UL 94	V0
Housing material	Zinc die-cast
Housing surface material	Nickel-plated
Depth	17.2 mm
Height	12.5 mm

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

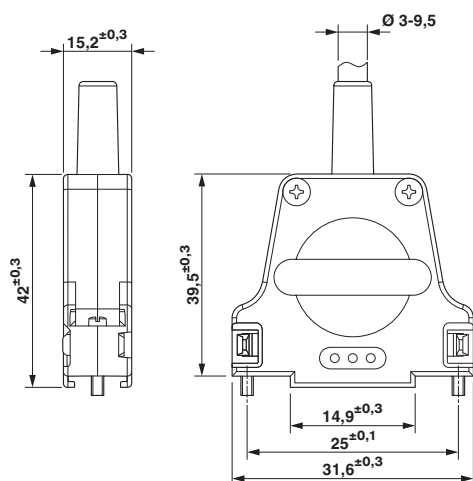

Schematic diagram

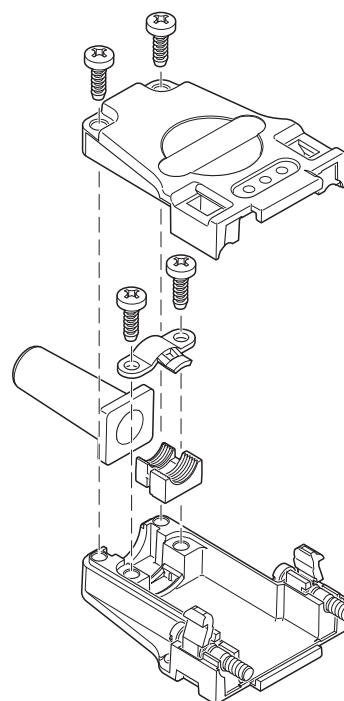

D-SUB sleeve housings

## Approvals

Approvals

Approvals

EAC

## D-SUB sleeve housings - CUC-DST-GZNI-S/DSSC9 - 1419722

### Approvals

Ex Approvals

---

#### Approval details

EAC		B.01742
-----	---	---------



---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>