

# DATASHEET - EASY-E4-UC-8RE1



**I/O expansion, For use with easyE4, 12/24 V DC, 24 V AC, Inputs expansion (number) digital: 4, screw terminal**

**EATON**  
Powering Business Worldwide™

**Part no.** **EASY-E4-UC-8RE1**  
**Catalog No.** **197217**  
  
**EL-Nummer (Norway)** **4500550**

## Delivery program

Product range	Control relays easyE4
Subrange	easyE4 digital input/output enhancements
Basic function	easyE4 extensions
Description	Input/output extension for easyE4 control relay Expandable with the easyE4 series of digital input/output expansions with easy-E4-CONNECT1 connector (Item Y7-197225) Rated operating voltage 12V DC, 24V DC or 24V AC Digital inputs: 4 Digital outputs: 4 relays Screw terminals
<b>Inputs</b>	
Inputs expansion (number)	digital: 4
<b>Additional features</b>	
Display	with diagnostic LED
Software	EASYSOFT-SWLIC/easySoft 7
Supply voltage	12/24 V DC 24 V AC
For use with	easyE4

## Technical data

General		
Standards		EN 61000-6-2 EN 61000-6-3 IEC 60068-2-6 IEC 60068-2-27 IEC 60068-2-30 IEC 61131-2 EN 61010 EN 50178
Approvals		cULus
Approvals		DNV GL
shipping classification		
Dimensions (W x H x D)	mm	35.5 x 90 x 58
Weight	kg	0.125
Mounting		Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories)
Connection type		Screw terminal

## Terminal capacities

Screw terminals			
Solid	mm <sup>2</sup>	0.2/4 (AWG 22 - 12)	
Flexible with ferrule	mm <sup>2</sup>	0.2 - 2.5	
Standard screwdriver	mm	3.5 x 0.8	
Max. tightening torque	Nm	0.6	
Push-in terminals			
Solid	mm <sup>2</sup>	0.2/4 (AWG 22 - 12)	

## Climatic environmental conditions

Operating ambient temperature	°C	-25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2
Condensation		Take appropriate measures to prevent condensation
Storage	°C	-40 - +70
relative humidity	%	in accordance with IEC 60068-2-30, IEC 60068-2-78 5 - 95
Air pressure (operation)	hPa	795 - 1080

## Ambient conditions, mechanical

Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Vibrations	Hz		In accordance with IEC 60068-2-6 constant amplitude 0.15 mm: 10 - 57 constant acceleration 2 g: 57 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms	Impacts	18	
Drop to IEC/EN 60068-2-31	Drop height	mm	50
Free fall, packaged (IEC/EN 60068-2-32)		m	0.3
Mounting position			Vertical or horizontal

## Electromagnetic compatibility (EMC)

Overvoltage category/pollution degree			III/2
Electrostatic discharge (ESD)			
applied standard			according to IEC EN 61000-4-2
Air discharge	kV	8	
Contact discharge	kV	6	
Electromagnetic fields (RFI) to IEC EN 61000-4-3	V/m	0.8 - 1.0 GHz: 10 1.4 - 2 GHz: 3 2.0 - 2.7 GHz: 1	
Radio interference suppression		EN 61000-6-3 Class B	
Burst	kV	according to IEC/EN 61000-4-4 Supply cables: 2 Signal cables: 2	
power pulses (Surge)		according to IEC/EN 61000-4-5 1 kV (supply cables, symmetrical) 2 kV (supply cables, asymmetrical)	
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10	

## Insulation resistance

Clearance in air and creepage distances		nach EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201
Insulation resistance		in accordance with EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201

## Power supply

Rated operational voltage	U <sub>e</sub>	V	12/24 DC (-15/+20%) 24 AC (-15/+10%)
Permissible range	U <sub>e</sub>		10.2 - 28.8 V DC 20.4 - 26.4 V AC
Residual ripple		%	≤ 5
Siemens MPI, (optional)			yes
Frequency		Hz	50/60 (± 5%)
Input current			max. 150 mA at 12 V DC max. 80 mA at 24 V DC
Voltage dips		ms	≤ 20 ms at 24 V AC 10 ms at 24 V DC 1 ms at 12 V DC
Fuse		A	≥ 1A (T)
Heat dissipation at 24 V DC		W	2

## Digital inputs 12 V DC

Number			4
Potential isolation			from power supply: no between inputs: no from the outputs: yes to base unit: yes to expansion devices: yes
Rated operational voltage	U <sub>e</sub>	V DC	12
Input voltage		V DC	Status 0: ≤ 5 (I1 - I4) Condition 1: ≥ 8 (I1 - I4)
Input current at signal 1		mA	1.75 mA (I1 - I4)
Deceleration time		ms	type 0.2 (0 -> 1) type 0.15 (1 -> 0)
Cable length		m	100 (unshielded)

## Digital inputs 24 V DC

Number			4
Potential isolation			from power supply: no between inputs: no from the outputs: yes to base unit: yes to expansion devices: yes

Rated operational voltage	$U_e$	V DC	24
Input voltage		V DC	Signal 0: $\leq 5$ (I1 - I4) Signal 1: $\geq 15$ (I1 - I4)
Input current at signal 1		mA	3.3 (I1 - I4)
Deceleration time		ms	type 0.1 (0 -> 1) type 0.2 (1 -> 0)
Cable length		m	100 (unshielded)

### Digital inputs 24 V AC

Number			4
Potential isolation			from power supply: no between inputs: no from the outputs: yes to base unit: yes to expansion devices: yes
Rated operational voltage	$U_e$	V AC	24
Input voltage (AC = sinusoidal)	$U_e$	V	Status 0: $\leq 5$ (I1 - I8) Condition 1: $\geq 14$ (I1 - I4)
Rated frequency		Hz	50/60
Input current at signal 1		mA	I1 - I4: 3.5 (at 24 VAC/DC)
Deceleration time		ms	type 25/21 (0 -> 1/1 -> 0, 50/60Hz)
Cable length		m	40 (unshielded)

### Relay outputs

Number			4
Outputs in groups of			1
Parallel switching of outputs for increased output			Not permitted
Protection of an output relay			B16 circuit breaker or 8 A (T) fuse
Potential isolation			Safe isolation according to EN 50178: 300 V AC Basic isolation: 600 V AC from power supply: yes From the inputs: yes between outputs: yes to expansion devices: yes
Contacts			
Conventional thermal current (10 A UL)		A	5
Recommended for load: 12 V AC/DC		mA	> 500
Rated impulse withstand voltage $U_{imp}$ of contact coil		kV	6
Rated operational voltage	$U_e$	V AC	240
Rated insulation voltage	$U_i$	V AC	240
Safe isolation according to EN 50178		V AC	300 between coil and contact 300 between two contacts
Making capacity			
AC-15, 250 V AC, 3 A (600 ops./h)		Operations	300000
DC-13, L/R $\leq 150$ ms, 24 V DC, 1 A (500 S/h)		Operations	200000
Breaking capacity			
AC-15, 250 V AC, 3 A (600 Ops./h)		Operations	300000
DC-13, L/R $\leq 150$ ms, 24 V DC, 1 A (500 S/h)		Operations	200000
Filament bulb load			
1000 W at 230/240 V AC		Operations	25000
500 W at 115/120 V AC		Operations	25000
Fluorescent lamp load			
Fluorescent lamp load 10 x 58 W at 230/240 V AC			
With upstream electrical device		Operations	25000
Uncompensated		Operations	25000
Fluorescent lamp load 1 x 58 W at 230/240 V AC, conventional, compensated		Operations	25000
Switching frequency			
Mechanical operations		$\times 10^6$	10
Switching frequency		Hz	10
Resistive load/lamp load		Hz	2
Inductive load		Hz	0.5
UL/CSA			

Uninterrupted current at 240 V AC	A	5
Uninterrupted current at 24 V DC	A	5
AC		
Control Circuit Rating Codes (utilization category)		B 300 Light Pilot Duty
Max. rated operational voltage	V AC	300
max. thermal continuous current cos φ = 1 at B 300	A	5
max. make/break cos φ ≠ capacity 1 at B 300	VA	3600/360
DC		
Control Circuit Rating Codes (utilization category)		R 300 Light Pilot Duty
Max. rated operational voltage	V DC	300
Max. thermal uninterrupted current at R 300	A	1
Max. make/break capacity at R 300	VA	28/28

## Design verification as per IEC/EN 61439

Technical data for design verification	P <sub>vs</sub>	W	2
Static heat dissipation, non-current-dependent		°C	-25
Operating ambient temperature min.		°C	55
Operating ambient temperature max.			
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0

PLC's (EG000024) / Logic module (EC001417)	V	20.4 - 28.8
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / Logic module (ecl@ss10.0.1-27-24-22-16 [AKE539014])	V	20.4 - 28.8
Supply voltage AC 50 Hz	V	10.2 - 28.8
Supply voltage AC 60 Hz	V	AC/DC
Supply voltage DC	A	5
Voltage type of supply voltage		0
Switching current		0
Number of analogue inputs		0
Number of analogue outputs		0

Number of digital inputs	4
Number of digital outputs	4
With relay output	Yes
Number of HW-interfaces industrial Ethernet	0
Number of interfaces PROFINET	0
Number of HW-interfaces RS-232	0
Number of HW-interfaces RS-422	0
Number of HW-interfaces RS-485	0
Number of HW-interfaces serial TTY	0
Number of HW-interfaces USB	0
Number of HW-interfaces parallel	0
Number of HW-interfaces Wireless	0
Number of HW-interfaces other	2
With optical interface	No
Supporting protocol for TCP/IP	No
Supporting protocol for PROFIBUS	No
Supporting protocol for CAN	No
Supporting protocol for INTERBUS	No
Supporting protocol for ASI	No
Supporting protocol for KNX	No
Supporting protocol for MODBUS	No
Supporting protocol for Data-Highway	No
Supporting protocol for DeviceNet	No
Supporting protocol for SUCONET	No
Supporting protocol for LON	No
Supporting protocol for PROFINET IO	No
Supporting protocol for PROFINET CBA	No
Supporting protocol for SERCOS	No
Supporting protocol for Foundation Fieldbus	No
Supporting protocol for EtherNet/IP	No
Supporting protocol for AS-Interface Safety at Work	No
Supporting protocol for DeviceNet Safety	No
Supporting protocol for INTERBUS-Safety	No
Supporting protocol for PROFIsafe	No
Supporting protocol for SafetyBUS p	No
Supporting protocol for other bus systems	No
Radio standard Bluetooth	No
Radio standard WLAN 802.11	No
Radio standard GPRS	No
Radio standard GSM	No
Radio standard UMTS	No
IO link master	No
Redundancy	No
With display	No
Degree of protection (IP)	IP20
Basic device	No
Expandable	Yes
Expansion device	Yes
With timer	No
Rail mounting possible	Yes
Wall mounting/direct mounting	Yes
Front build in possible	Yes
Rack-assembly possible	No
Suitable for safety functions	No
Category according to EN 954-1	


SIL according to IEC 61508		None
Performance level acc. EN ISO 13849-1		None
Appendant operation agent (Ex ia)		No
Appendant operation agent (Ex ib)		No
Explosion safety category for gas		None
Explosion safety category for dust		None
Width	mm	35.5
Height	mm	90
Depth	mm	58

## Approvals

Degree of Protection

IEC: IP20, UL/CSA Type: -

## Dimensions

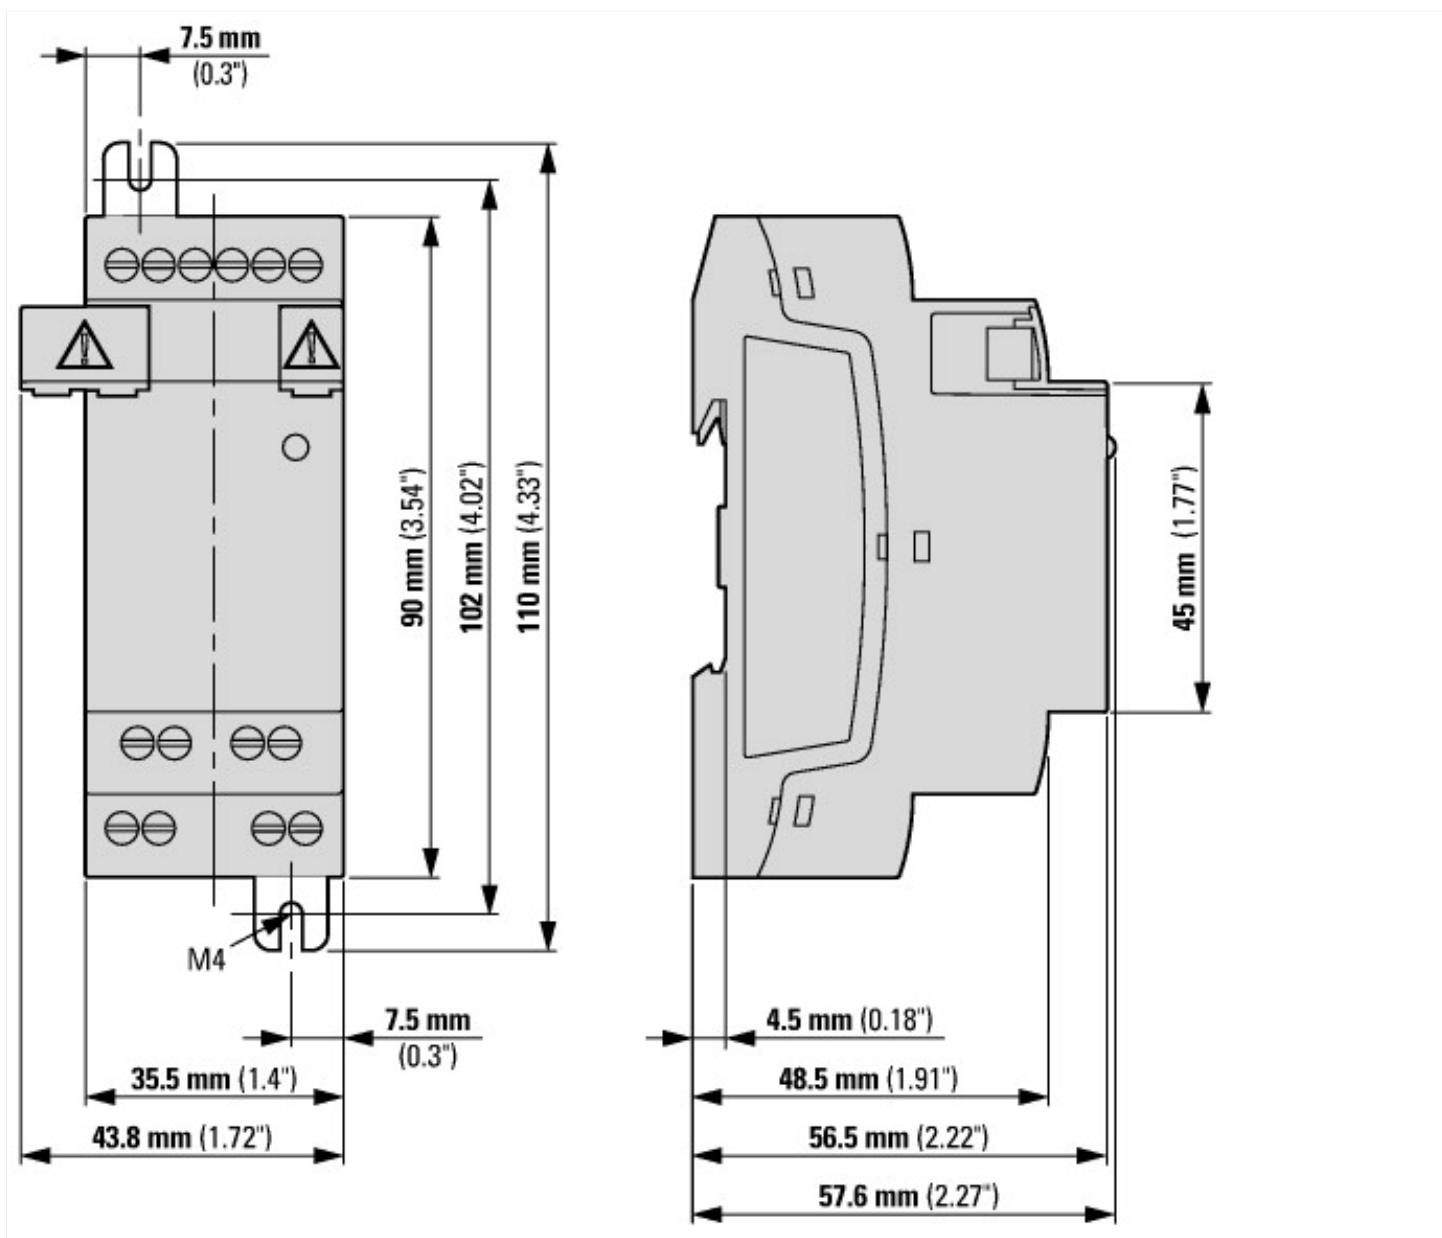

## Assets (links)

### Declaration of CE Conformity

00003207

### Instruction Leaflets

IL050021Z2019\_02

### Manuals

MN050009\_DE (German)

MN050009\_EN (English)

MN050009\_IT (Italian)

## Additional product information (links)

**assembly instructions easyE4 IL050021ZU**assembly instructions easyE4 IL050021ZU [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL050021ZU2019\\_02.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050021ZU2019_02.pdf)**easyE4 (MN050009) manual**easyE4 – Handbuch (MN050009) - Deutsch [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_DE.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf)easyE4 (MN050009) manual - English [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_EN.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf)Manuale easy E4 (MN050009) - italiano [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_IT.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_IT.pdf)instrukcja easyE4 (MN050009) - polski [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_PL.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_PL.pdf)Produktübersicht (WEB) <http://www.eaton.eu/easyE4>