



I/O expansion, For use with easyE4, 24 V DC, Inputs expansion (number) analog: 4, screw terminal

**Part no.** EASY-E4-DC-6AE1  
**Catalog No.** 197223  
**EL-Number (Norway)** 4500554

### Delivery program

Product range		Control relays easyE4
Subrange		easyE4 analog input/output enhancements
Basic function		easyE4 extensions
Description		Input/output extension for easyE4 control relay Expandable with the easyE4 series of digital input/output expansions with easy-E4-CONNECT1 connector (Item Y7-197225) Rated operating voltage 24V DC Analog inputs: 4 Analog outputs: 2 Screw terminals
<b>Inputs</b>		
Inputs expansion (number)		Analog: 4
Analog		4
<b>Additional features</b>		
Display		with diagnostic LED
Software		EASYSOFT-SWLIC/easySoft 7
Supply voltage		24 V DC
For use with		easyE4

### Technical data

#### General

Standards		EN 61000-6-2 EN 61000-6-3 IEC 60068-2-6 IEC 60068-2-27 IEC 60068-2-30 IEC 61131-2 EN 61010 EN 50178
Dimensions (W x H x D)	mm	35.5 x 90 x 58
Weight	kg	0.088
Mounting		Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories)
Connection type		Screw terminal

#### Terminal capacities

Screw terminals		
Solid	mm <sup>2</sup>	0.2/4 (AWG 22 - 12)
Flexible with ferrule	mm <sup>2</sup>	0.2 - 2.5
Standard screwdriver	mm	3.5 x 0.8
Max. tightening torque	Nm	0.6
Push-in terminals		
Solid	mm <sup>2</sup>	0.2/4 (AWG 22 - 12)

#### Climatic environmental conditions

Operating ambient temperature	°C	-25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2
Condensation		Take appropriate measures to prevent condensation
Storage	θ °C	-40 - +70
relative humidity	%	in accordance with IEC 60068-2-30, IEC 60068-2-78 5 - 95
Air pressure (operation)	hPa	795 - 1080

#### Ambient conditions, mechanical

Protection type (IEC/EN 60529, EN50178, VBG 4)		IP20
Vibrations	Hz	In accordance with IEC 60068-2-6

			constant amplitude 0.15 mm: 10 - 57 constant acceleration 2 g: 57 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms		Impacts	18
Drop to IEC/EN 60068-2-31	Drop height	mm	50
Free fall, packaged (IEC/EN 60068-2-32)		m	0.3
Mounting position			Vertical or horizontal

### Electromagnetic compatibility (EMC)

Overvoltage category/pollution degree			III/2
Electrostatic discharge (ESD)			
applied standard			according to IEC EN 61000-4-2
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI) to IEC EN 61000-4-3		V/m	0.8 - 1.0 GHz: 10 1.4 - 2 GHz: 3 2.0 - 2.7 GHz: 1
Radio interference suppression			EN 61000-6-3 Class B
Burst		kV	according to IEC/EN 61000-4-4 Supply cables: 2 Signal cables: 2
power pulses (Surge)			according to IEC/EN 61000-4-5 0.5 kV (supply cables, symmetrical) 1 kV (supply cables, asymmetrical)
Immunity to line-conducted interference to (IEC/EN 61000-4-6)		V	10

### Insulation resistance

Clearance in air and creepage distances			nach EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201
Insulation resistance			in accordance with EN 50178, EN 61010-2-201, UL61010-2-201, CSA-C22.2 NO. 61010-2-201

### Power supply

Rated operational voltage	$U_e$	V	24 DC (-15/+20%)
Permissible range	$U_e$		20.4 - 28.8 V DC
Residual ripple		%	≤ 5
Siemens MPI, (optional)			yes
Input current			max. 100 mA at $U_e$
Voltage dips		ms	≤ 10
Fuse		A	≥ 1A (T)
Heat dissipation at 24 V DC		W	2.5

### Analog inputs

Number			4
Potential isolation			from power supply: no to the in/outputs: no to expansion devices: yes
Input type			Voltage or current, selectable per input
Signal range			0-10 V DC 0 - 20 mA 4 - 20 mA
Resolution			12 Bit (value 0 - 4095)
Cable length		m	≤ 10, screened

### Analog outputs

Number			2
Potential isolation			from power supply: no to the in/outputs: no to the expansion units: yes
Output type			Voltage or current, selectable per input
Signal range			0-10 V DC 0 - 20 mA 4 - 20 mA
Resolution			12 Bit (value 0 - 4095)
Accuracy			
-25 °C - 55 °C		%	1
Cable length		m	≤ 10, shielded

### Design verification as per IEC/EN 61439

Technical data for design verification			
--	--	--	--

Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	2
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0

PLC's (EG000024) / Logic module (EC001417)

Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / Logic module (ecl@ss10.0.1-27-24-22-16 [AKE539014])


Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	20.4 - 28.8
Voltage type of supply voltage		DC
Switching current	A	0.5
Number of analogue inputs		4
Number of analogue outputs		2
Number of digital inputs		0
Number of digital outputs		0
With relay output		No
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces other		2
With optical interface		No
Supporting protocol for TCP/IP		No

Supporting protocol for PROFIBUS			No
Supporting protocol for CAN			No
Supporting protocol for INTERBUS			No
Supporting protocol for ASI			No
Supporting protocol for KNX			No
Supporting protocol for MODBUS			No
Supporting protocol for Data-Highway			No
Supporting protocol for DeviceNet			No
Supporting protocol for SUCONET			No
Supporting protocol for LON			No
Supporting protocol for PROFINET IO			No
Supporting protocol for PROFINET CBA			No
Supporting protocol for SERCOS			No
Supporting protocol for Foundation Fieldbus			No
Supporting protocol for EtherNet/IP			No
Supporting protocol for AS-Interface Safety at Work			No
Supporting protocol for DeviceNet Safety			No
Supporting protocol for INTERBUS-Safety			No
Supporting protocol for PROFIsafe			No
Supporting protocol for SafetyBUS p			No
Supporting protocol for other bus systems			No
Radio standard Bluetooth			No
Radio standard WLAN 802.11			No
Radio standard GPRS			No
Radio standard GSM			No
Radio standard UMTS			No
IO link master			No
Redundancy			No
With display			No
Degree of protection (IP)			IP20
Basic device			No
Expandable			Yes
Expansion device			Yes
With timer			No
Rail mounting possible			Yes
Wall mounting/direct mounting			Yes
Front build in possible			Yes
Rack-assembly possible			No
Suitable for safety functions			No
Category according to EN 954-1			
SIL according to IEC 61508			None
Performance level acc. EN ISO 13849-1			None
Appendant operation agent (Ex ia)			No
Appendant operation agent (Ex ib)			No
Explosion safety category for gas			None
Explosion safety category for dust			None
Width		mm	35.5
Height		mm	90
Depth		mm	58

## Approvals

Degree of Protection			IEC: IP20, UL/CSA Type: -
----------------------	--	--	---------------------------

## Dimensions

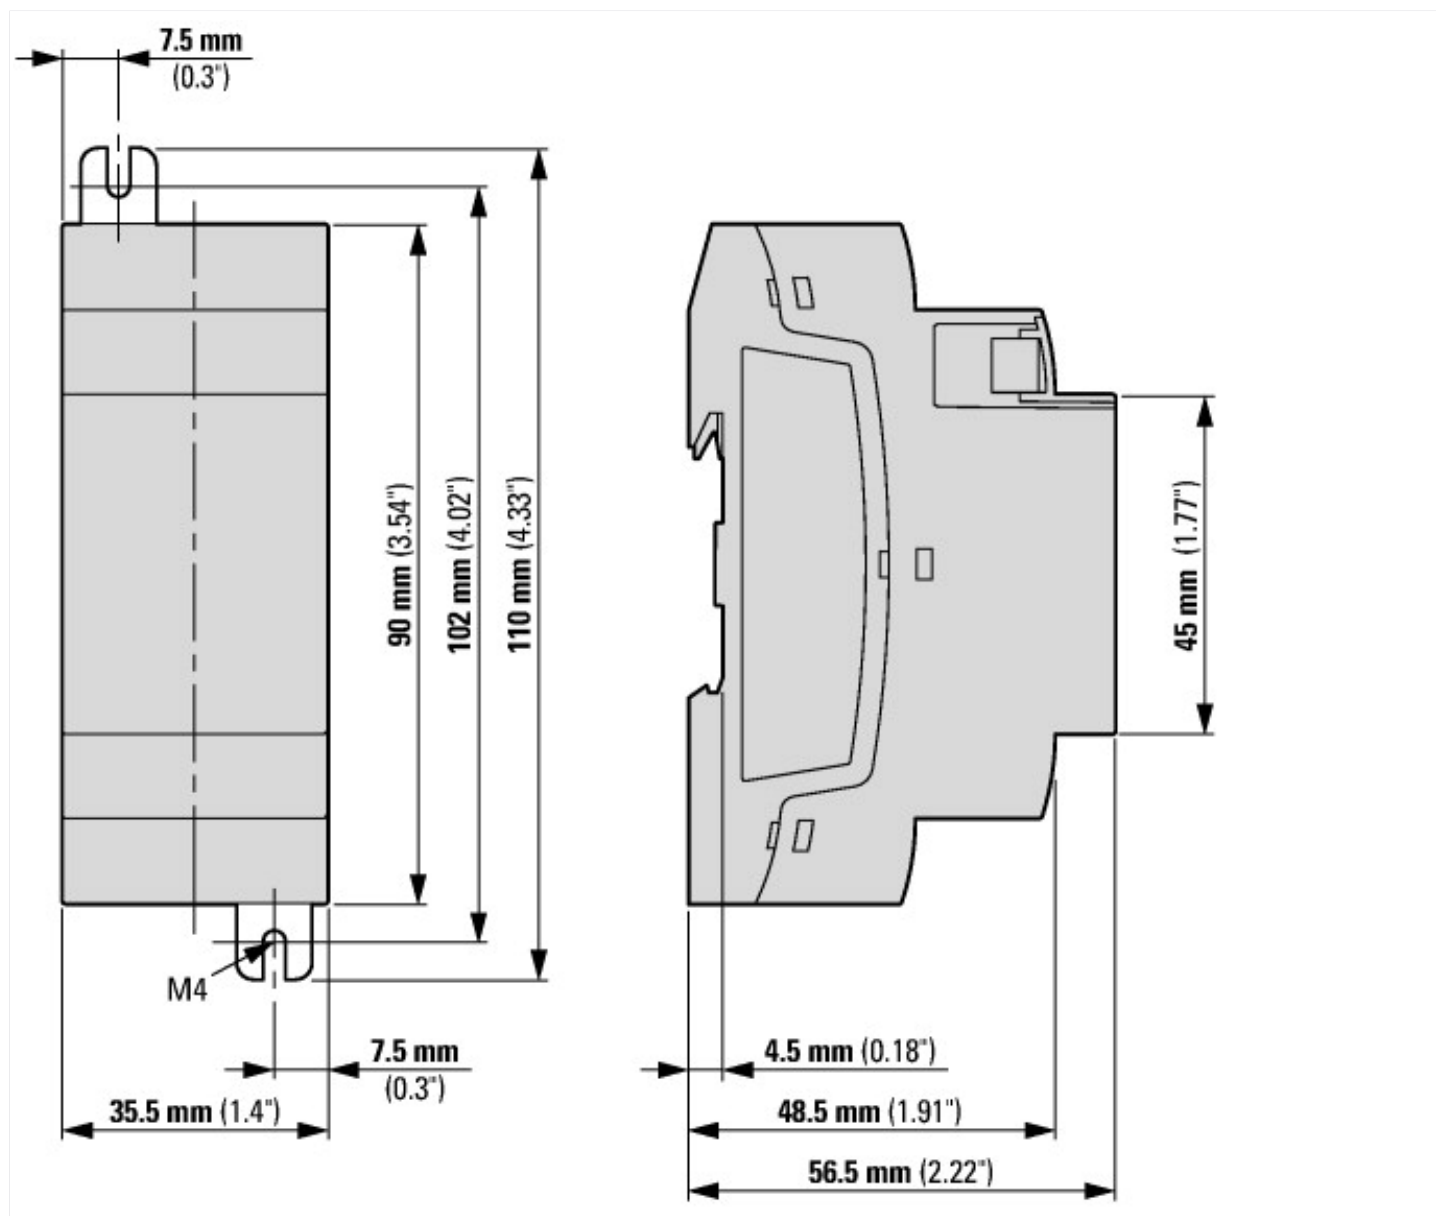

## Assets (links)

### Declaration of CE Conformity

00003205

### Instruction Leaflets

IL050021Z2019\_02

### Manuals

MN050009\_DE (German)

MN050009\_EN (English)

MN050009\_IT (Italian)

MN050009\_PL (Polish)

## Additional product information (links)

### assembly instructions easyE4 IL050021ZU

assembly instructions easyE4 IL050021ZU [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL050021ZU2019\\_02.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL050021ZU2019_02.pdf)

### easyE4 (MN050009) manual

easyE4 – Handbuch (MN050009) - Deutsch [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_DE.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_DE.pdf)

easyE4 (MN050009) manual - English [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_EN.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_EN.pdf)

Manuale easy E4 (MN050009) - italiano [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_IT.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_IT.pdf)

instrukcja easyE4 (MN050009) - polski [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN050009\\_PL.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050009_PL.pdf)

Produktübersicht (WEB) <http://www.eaton.eu/easyE4>