

# 10 Series

## Electromechanical Totalizer



A 6 figure general purpose, rugged, electromechanical counter, either panel or base mounted, with manual knob reset, key reset, or thumb wheel reset. Frame and housing provides rigid support for accurate alignment and trouble-free use. Distinctive numerals enhance visibility under adverse viewing conditions.

### Key Features

- Panel or base mount
- Rigid support for accurate alignment
- Enhanced visibility
- Manual knob, key or thumb wheel reset
- Options for:
  - Lead lengths
  - Terminations
  - Mounting
  - 1071-024S - additional key for model 1026

### Applications


- Molding Machines
- Punch Press
- Printing presses
- Test Labs
- Secondary Machines

## Common Specifications

<b>Figures</b>	6 figures, white on black, 0.19" [5mm] high
<b>Reset</b>	Knob, lock and key, or thumb wheel
<b>Speed</b>	1,000 counts/minute (min. 30ms - on, 30ms - off)
<b>Voltage</b>	115VAC (+/- 10%, but not to exceed 10 volts)
<b>Power</b>	7.8 watts (nominal)
<b>Mounting</b>	Base or panel
<b>Terminations</b>	(2)#22 AWG 105°C wire leads, 8" [203mm] long
<b>Operating Life</b>	> 5,000,000
<b>Temp. Range</b>	-15°F to +140°F [-26°C to +60°C]
<b>Approvals</b>	UL Recognized, CE Compliant, ROHS
<b>Weight</b>	18 to 22 oz. [510 to 624g]




## Dimensions

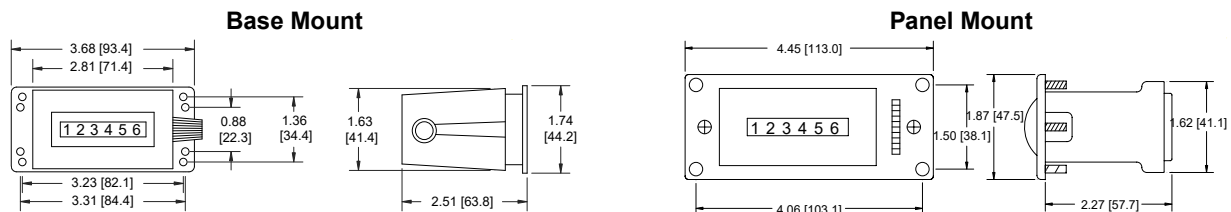

Mounting holes: 0.15" [3.8mm] Dia.

Screws provided: 6-32 x 0.6 [15.2mm]  
Panel cutout: 3.85" x 1.75" [97.8 x 44.5mm]

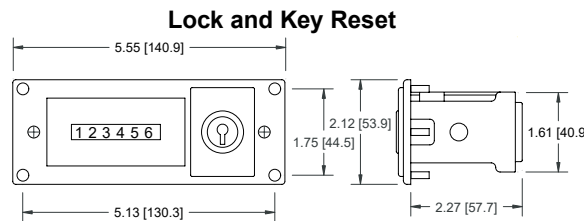

Screws provided: 6-32 x 0.6 [15.2mm]  
Panel cutout: 4.88" x 1.75" [124.0 x 44.5mm]

## Part Numbers:

<b>2-1006</b>	115VAC, base mount, knob reset
<b>P2-1006</b>	115VAC, panel mount, thumb wheel reset
<b>P32-1026</b>	115VAC, panel mount, lock and key reset

