

Digital monitoring relay 3-phase supply voltage Autom. phase sequence correction Phase failure 3 x 160 to 690 V 50 to 60 Hz AC Undervoltage and overvoltage 160-690 V Hysteresis 1-20 V OFF delay 0-20 s Asymmetry 0-20% 1 CO for phase correction 1 CO for line supply faults spring-type connection system



Figure similar

Product brand name	SIRIUS
Product designation	Network monitoring relay with digital setting
Design of the product	5 functions
Product type designation	3UG4

General technical data	
Product function	Phase monitoring relay
Display version LED	No
Design of the display	LCD
Insulation voltage	
<ul style="list-style-type: none"> <li>for overvoltage category III according to IEC 60664</li> <li>— with degree of pollution 3 rated value</li> </ul>	690 V
Degree of pollution	3
Type of voltage	
<ul style="list-style-type: none"> <li>for monitoring</li> <li>of the control supply voltage</li> </ul>	AC AC
Surge voltage resistance rated value	6 kV

<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms
<b>Vibration resistance</b>	
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-6</li> </ul>	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>Mechanical service life (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• typical</li> </ul>	10 000 000
<b>Electrical endurance (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• at AC-15 at 230 V typical</li> </ul>	100 000
<b>Thermal current of the switching element with contacts maximum</b>	5 A
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	K
<b>Reference code acc. to DIN EN 81346-2</b>	K
<b>Reference code acc. to DIN EN 61346-2</b>	K
<b>Relative repeat accuracy</b>	1 %

### Product Function

<b>Product function</b>	
<ul style="list-style-type: none"> <li>• undervoltage detection</li> <li>• Overvoltage detection</li> <li>• phase sequence recognition</li> <li>• Phase failure detection</li> <li>• Phase unbalance</li> <li>• Overvoltage detection 3 phase</li> <li>• undervoltage detection 3 phases</li> <li>• Voltage window recognition 3 phase</li> <li>• Adjustable open/closed-circuit current principle</li> <li>• Auto-reset</li> </ul>	 Yes Yes Yes Yes Yes Yes Yes Yes No Yes

### Control circuit/ Control

<b>Control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>	 160 ... 690 V 160 ... 690 V
<b>Operating range factor control supply voltage rated value at AC at 50 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> <li>• Full-scale value</li> </ul>	 1 1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> <li>• Full-scale value</li> </ul>	 1 1

### Measuring circuit

<b>Adjustable response delay time</b>	
---------------------------------------	--

• with lower or upper limit violation	0.1 ... 20 s
<b>Accuracy of digital display</b>	+/-1 digit
<b>Precision</b>	
<b>Relative metering precision</b>	5 %
<b>Auxiliary circuit</b>	
<b>Number of NC contacts</b>	
• delayed switching	0
<b>Number of NO contacts</b>	
• delayed switching	0
<b>Number of CO contacts</b>	
• delayed switching	2
<b>Operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Main circuit</b>	
<b>Number of poles for main current circuit</b>	3
<b>Outputs</b>	
<b>Ampacity of the output relay at AC-15</b>	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A
<b>Ampacity of the output relay at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>Operating current at 17 V minimum</b>	5 mA
<b>Continuous current of the DIAZED fuse link of the output relay</b>	4 A
<b>Electromagnetic compatibility</b>	
<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>Galvanic isolation</b>	
• between entrance and outlet	Yes
• between the outputs	Yes
• between the voltage supply and other circuits	Yes
<b>Connections/ Terminals</b>	

<b>Product function</b>	
<ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	Yes
<b>Type of electrical connection</b>	spring-loaded terminals
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	2 x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded without core end processing</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>at AWG conductors solid</li> </ul>	2x (24 ... 16)
<ul style="list-style-type: none"> <li>at AWG conductors stranded</li> </ul>	2x (24 ... 16)
<b>Connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	0.25 ... 1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	0.25 ... 1.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>finely stranded without core end processing</li> </ul>	0.25 ... 1.5 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	24 ... 16
<ul style="list-style-type: none"> <li>stranded</li> </ul>	24 ... 16

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	snap-on mounting
<b>Height</b>	94 mm
<b>Width</b>	22.5 mm
<b>Depth</b>	91 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm 0 mm
<ul style="list-style-type: none"> <li>for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm 0 mm
<ul style="list-style-type: none"> <li>for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm

— at the side

0 mm








## Ambient conditions

### Installation altitude at height above sea level

- maximum

2 000 m

## Certificates/ approvals

General Product Approval		EMC	Declaration of Conformity		
 CCC	 UL	 EAC	 RCM	 EG-Konf.	<a href="#">Miscellaneous</a>
Test Certificates		Marine / Shipping	other	Railway	
<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Special Test Certificate</a>	 LRS	 DNVGL.COM/AF	<a href="#">Confirmation</a>	<a href="#">Vibration and Shock</a>

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/ic10](http://www.siemens.com/ic10)

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4617-2CR20>

### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4617-2CR20>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4617-2CR20>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4617-2CR20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4617-2CR20&lang=en)

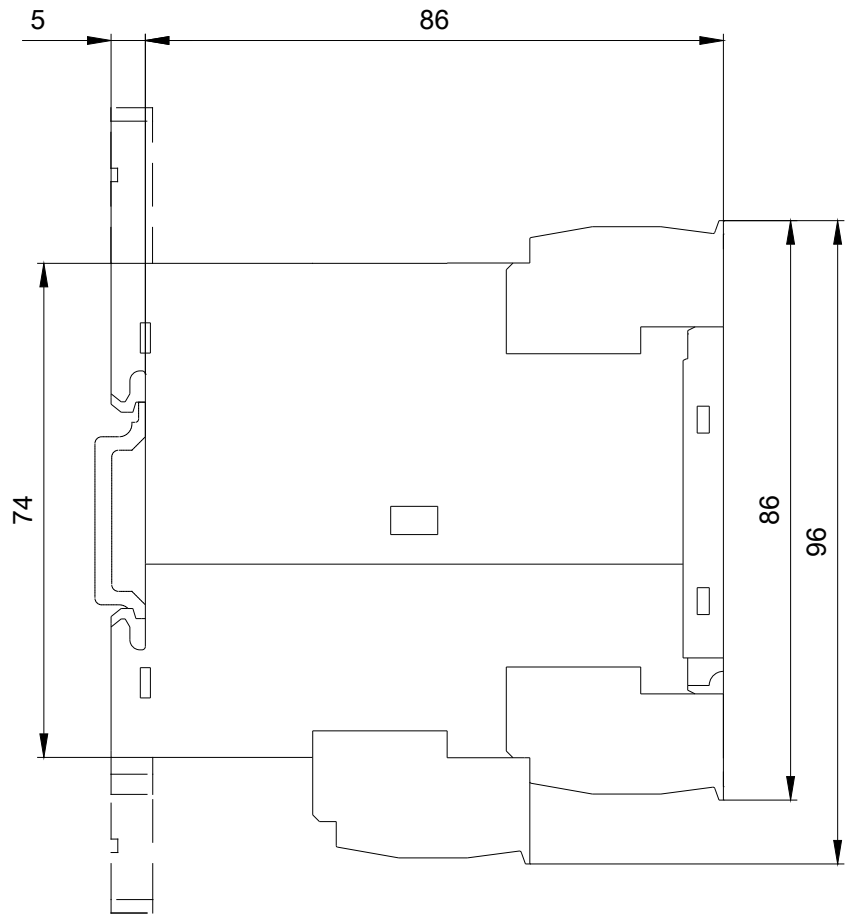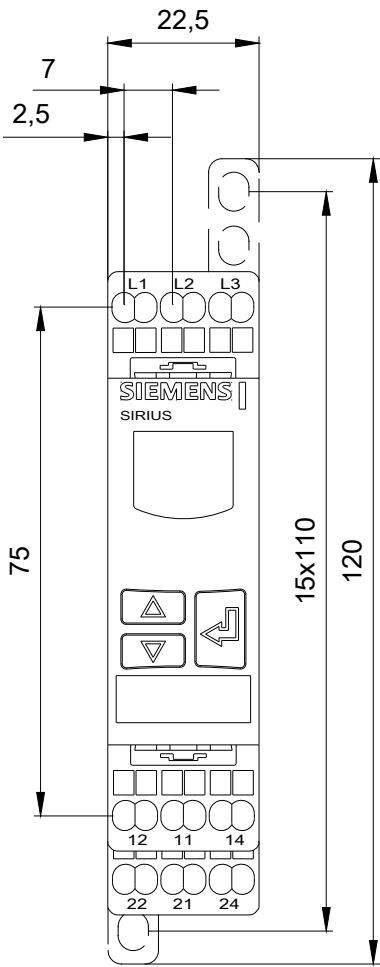

last modified:

03/06/2020