

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0436500515](#)
Status: **Active**
Overview: [Micro-Fit Connector System](#)
Description: Micro-Fit 3.0 Vertical Header, 3.00mm Pitch, Single Row, 5 Circuits, with PCB Polarizing Peg, Tin, Glow-Wire Capable, Black

Documents:


3D Model	Test Summary TS-43045-001-001 (PDF)
Drawing (PDF)	Test Summary TS-43045-002-001 (PDF)
3D Model (PDF)	Test Summary TS-46235-001-001 (PDF)
Product Specification PS-43650 (PDF)	Datasheet (PDF)
Packaging Specification PK-70873-0811-001 (PDF)	RoHS Certificate of Compliance (PDF)
Test Summary 430450004-TS-000 (PDF)	Product Literature (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	43650
Application	Power, Wire-to-Board
Comments	<p>High Temperature Square Pin Offset Through Hole Mounting Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. High Temperature Square Pin Offset Through Hole Mounting Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard</p>

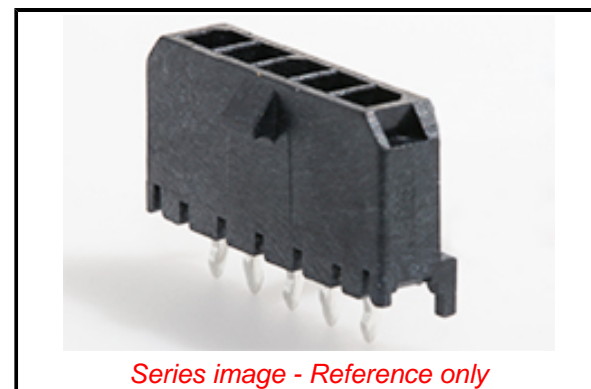

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ECHA_01_2020 (16 January 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[43650 Series](#)

Mates With

Micro-Fit 3.0 Receptacle Housing [43645](#)

Micro-Fit 3.0 TPA Receptacle Housing [171850](#)
Micro-Fit TPA Cable Assembly [145132](#)

IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""""

Overview
Product Name Micro-Fit Connector System
UPC Micro-Fit 3.0
800755008401

Physical

Breakaway No
Circuits (Loaded) 5
Circuits (maximum) 5
Color - Resin Black
Durability (mating cycles max) 30
Flammability 94V-0
Glow-Wire Capable Yes
Mated Height 17.27mm
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 0.870g
Number of Rows 1
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Tray
Pitch - Mating Interface 3.00mm
Plating min - Mating 2.540µm
Plating min - Termination 2.540µm
Polarized to PCB Yes
Shrouded Fully
Stackable No
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole - Kinked Pin

Electrical

Current - Maximum per Contact 8.5A
Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 030
Lead-freeProcess Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Packaging Specification PK-70873-0811-001
Product Specification PS-43650
Sales Drawing SD-43650-006
Symbol/Footprint Data SYM-43650-0515
Test Summary 430450004-TS-000, TS-43045-001-001,
TS-43045-002-001, TS-46235-001-001

This document was generated on 02/23/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION