


Product availability: Stock - Normally stocked in distribution facility

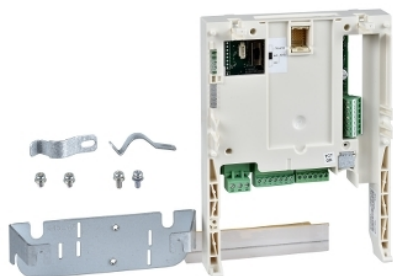

Main

Product or component type	Logic I/O card
Range compatibility	Altivar Lift Altivar 71Q Altivar 61 Altivar 71 Altivar 61Q
Supply	Internal supply for reference potentiometer, 10.5 V DC 10...11 V) , <0.01 A 1...10 kOhm overload and short-circuit protection Internal supply, 24 V DC 21...27 V) , <0.2 A overload and short-circuit protection
Discrete output number	5
Discrete output type	R3A, R3B, R3C) configurable relay logic LO1, LO2) assignable logic 1.5...2.5 ms level 1 PLC
Discrete output logic	LO1, LO2) negative LO1, LO2) positive
Discrete input number	4
Discrete input type	LI7...LI10) programmable level 1 PLC 3.5 kOhm 1.5...2.5 ms
Discrete input logic	Negative LI7...LI10), >= 16 V, <= 10 V Positive LI7...LI10), <= 5 V, >= 11 V

Complementary

Electrical durability	100000 cycles configurable relay logic
Discrete output voltage	24 V DC 12...30 V) assignable logic
Maximum output current	0.2 A, assignable logic
Minimum switching current	3 mA 24 V DC configurable relay logic
Maximum switching current	Configurable relay logic 2 A 250 V AC inductive, cos phi = 0.4 7 ms Configurable relay logic 2 A 30 V DC inductive, cos phi = 0.4 7 ms Configurable relay logic 5 A 250 V AC resistive, cos phi = 1 Configurable relay logic 5 A 30 V DC resistive, cos phi = 1
PTC probe input	TH1+, TH1- trip resistance 3 kOhm TH1+, TH1- reset resistance 1.8 Ohm TH1+, TH1- short circuit protection < 0.05 Ohm TH1+, TH1- for 6 PTC probe <= 1.5 Ohm
Discrete input voltage	24 V DC <= 30 V)programmable
Electrical connection	Terminal, 1.5 mm ² / AWG 16, 2.21 lbf.in (0.25 N.m)
Net weight	0.66 lb(US) (0.3 kg)

Ordering and shipping details

Category	22135 - ATV61-71 ACCESSORIES
Discount Schedule	CP4C
GTIN	00785901807018
Package weight(Lbs)	0.39 kg (0.86 lb(US))
Returnability	Yes
Country of origin	ID

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------