



Product availability: Stock - Normally stocked in distribution facility



### Main

|                           |                                |
|---------------------------|--------------------------------|
| Product or component type | Industrial Control Transformer |
| Power Rating              | 50 VA                          |
| Primary Voltage           | 240/480 V                      |
| Secondary Voltage         | 240 V                          |
| Type                      | T                              |

### Complementary

|                                |                       |
|--------------------------------|-----------------------|
| Number of Phases               | 1 phase               |
| Power Rating                   | 50 VA                 |
| Primary to Secondary Voltage   | 240/480 V 240 V       |
| Temperature rise               | 55 °C                 |
| Electrical connection          | Screw clamp terminals |
| Height                         | 65.53 mm (2.58 in)    |
| Width                          | 76.20 mm (3 in)       |
| Depth                          | 78.49 mm (3.09 in)    |
| Material                       | Copper winding        |
| Fingersafe Cover Compatibility | FSC1                  |

### Environment

|                        |  |
|------------------------|--|
| Product certifications | CSA file LR37055 guide 184-N-90<br>UL listed file E61239<br>CE |
| Enclosure Type         | Not rated (open device)  |
| Insulation temperature | 221 °F (105 °C)  |

### Ordering and shipping details

|                     |                                  |
|---------------------|----------------------------------|
| Category            | 16200 - 9070 T (NOT TF) 50-200VA |
| Discount Schedule   | CP8                              |
| GTIN                | 00785901905745                   |
| Package weight(Lbs) | 1.16 kg (2.56 lb(US))            |
| Returnability       | Yes                              |
| Country of origin   | MX                               |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Compliant <a href="#">EU RoHS Declaration</a>   |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | No need of specific recycling operations  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Approximate Dimensions

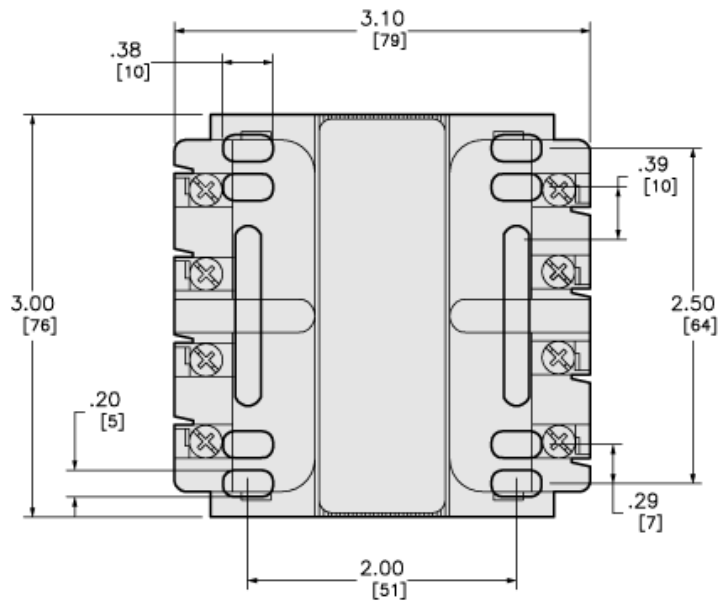

in.  
[mm]

