

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0014600231](#)
Status: **Active**
Overview: [SL Modular Connectors](#)
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version A, Non-polarized, Wire Size 24 AWG, 3.81µm Tin/Lead (SnPb), 23 Circuits

Documents:

3D Model	Product Specification PS-70400-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-0001-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	70400
Comments	Terminals Preloaded, Terminals Preloaded
Component Type	Housing
Glow-Wire Capable	No
Overview	SL Modular Connectors
Product Name	SL
UPC	800753766556

Physical


Circuits (Loaded)	23
Color - Resin	Black
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	24
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Material Info

Engineering Number	70400-0022
--------------------	------------

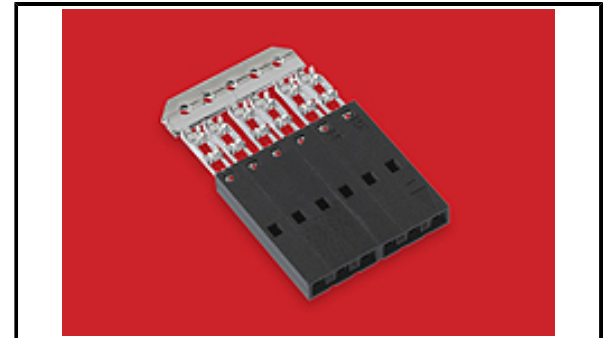

Series image - Reference only

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

Search Parts in this Series

[70400 Series](#)

Mates With

Single Row Headers and Housings, [8624](#) , [70203](#) , [42375](#) , [42377](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below.

Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

IDT - Semi-automatic [11200949](#)

- Bench-Top

Terminator

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-70873-0001-001

PS-70400-001

SDA-70400-0001-0024

Ribbon Cable Tool Kit, Press Not Included	<u>622016600</u>
Hawk Ribbon Cable Terminator without Break-off	<u>623003000</u>
Hawk Semi-Automatic Discrete Wire Terminator	<u>623003100</u>
Hawk Semi-Automatic Discrete Wire Terminator for Rebuilt CE Approved*	<u>623004900</u>
Hawk Flat Flex Cable Terminator with Break-off	<u>623005200</u>
Hawk Ribbon Cable Terminator with Break-off	<u>623005300</u>

This document was generated on 02/14/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION