

# Product data sheet

## Characteristics

# XZCC12MCM40B

male, M12, 4-pin, elbowed connector - cable gland Pg 7

Product availability: Stock - Normally stocked in distribution facility



## Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Elbowed male connector M12, 4 pins
Collar material	Metal
Status LED	Without
Cable connection	Screw terminal 0.00 in <sup>2</sup> (0.75 mm <sup>2</sup> ) 0.12...0.24 in (3...6 mm)

## Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	125 V AC 150 V DC
Line Rated Current	3 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 μOhm
Product weight	0.06 lb(US) (0.025 kg)




## Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...185 °F (-40...85 °C)

## Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	00785901690986
Package weight(Lbs)	0.03 kg (0.06 lb(US))
Returnability	Yes
Country of origin	HU


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>

Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

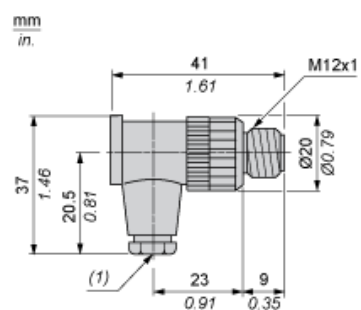

---

## Connections and Schemes

---

