


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/10/15	Jimmy	Rev.01 Changed To Rev.A
B	LEN1480564~567	2014/08/20	Vicky	Update Logo



Conn.

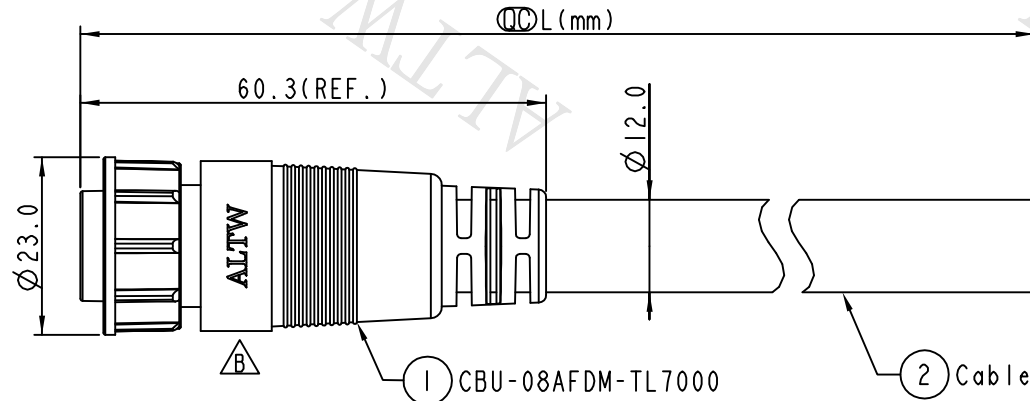

CBU-08AFDM-TL7AXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters


8	Drain	24AWG	地線
7	Green	24AWG	綠
6	White/Green	24AWG	白/綠
5	Orange	24AWG	橘
4	White/Orange	24AWG	白/橘
3	Blue	16AWG	藍
2	Brown	16AWG	棕
1	Green/Yellow	16AWG	綠/黃
Conn.	Wire Color		
	Pin Out		

Twist  
對線

Twist  
對線

Note:

- \*  $\text{CC}$  Important Dimension To Check
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Lock Nut: Nylon+GF, Black
- \* O-Ring: EPDM, Black
- \* Cable: UL2464 (24AWG\*2P+D+A1/My)+16AWG\*3C+F+P, Black, PVC Jacket, UV Resistant, OD=12.0
- \* Cable Length Tolerance:
  - 01M: ±40mm
  - 02M~05M: ±60mm
  - 06M~10M: ±100mm
  - 11M~30M: ±200mm
  - 31M~99M: ±500mm

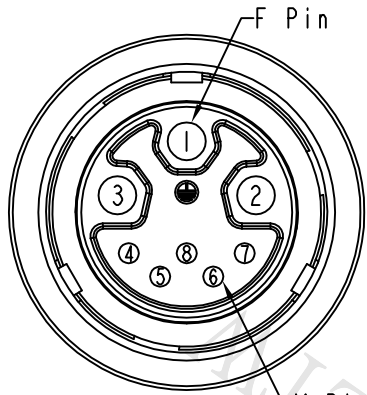

Conn.  
Pin Assignments  
Front View

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE HyBrid Cable, Middle, 3Key 3FPin(10A)+5MPin(2A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.1	$\text{CC}$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2014-08-20
DWG NO CBU-08AFDM-TL7AXX	CHECKED BY Sam	DATE 2014-08-20
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-08-20

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.