

# Klübersynth GEM 4 N

Synthetic high-performance gear and multipurpose oil  
with KlüberComp Lube Technology



---

## Your benefits at a glance

- High scuffing protection
  - Excellent wear protection for gears and rolling bearings
  - Good shear stability for reliable lubricant film formation
  - High micropitting resistance
  - Excellent ageing and oxidation resistance
  - Wide service temperature range due to good viscosity-temperature behaviour
  - Low foaming tendency
  - Energy savings due to optimised friction behaviour
  - Good elastomer compatibility
  - Approvals by numerous gear OEMs
- 

## Your requirements — our solution

Klübersynth GEM 4 N is a synthetic high-performance gear and multipurpose oil based on polyalphaolefin satisfying the growing requirements and increasing power density of modern gears. Klübersynth GEM 4 N includes KlüberComp Lube Technology\*, i.e. it is based on especially high-grade raw materials and advanced additives, enabling maximum performance in the lubrication of all gear components.

Klübersynth GEM 4 N clearly exceeds CLP requirements according to DIN 51517-3. Corresponding gears can be switched to Klübersynth GEM 4 N without prior consultation with the gear manufacturer provided the general application notes are observed.

Klüberoil GEM 4 N offers high scuffing load capacity. Gears are sufficiently protected against scuffing even at extremely high peak loads, vibrations or oscillations. The excellent wear protection of both gears and rolling bearings ensures that the service life calculated for the lubricated components is achieved, leading to lower maintenance and repair costs. The oil's high micropitting resistance of GFT  $\geq 10$  according to FVA 54/7 offers sufficient protection to gears that are subject to high loads and would normally be susceptible to this type of damage.

Klübersynth GEM 4 N offers a much longer service life than mineral oils due to the excellent ageing and oxidation resistance of the selected raw materials; thus service intervals can be extended and maintenance costs reduced. The product's low foaming tendency and anti-corrosive properties enable problem-free gear operation. Freudenberg seals made of 72 NBR 902, 75 FKM 585, 75 FKM 260466 and 75 FKM 170055 are resistant to Klübersynth GEM 4 N. Leakage and oil contamination are prevented.

The excellent viscosity-temperature behaviour supports the formation of a sufficient lubricant film across a wide service temperature range, even at elevated and high temperatures. Therefore, a single viscosity grade can cover both low and high temperatures in many applications.

The optimised friction behaviour enabled by the carefully selected base oils reduces power loss and improves gear efficiency.

Klübersynth GEM 4 N is approved by Bosch Rexroth, SEW Eurodrive, Getriebbau Nord, Lenze, Moventas, Bonfiglioli, Stöber Antriebstechnik, ZAE Antriebssysteme, David Brown, FLSmidth MAAG Gears, ACCIONA ENERGY, etc.

By using Klübersynth GEM 4 N you can benefit from a number of advantages that will help you save costs easily and efficiently. We look forward to hearing from you.

\* For further information, please see our flyer: KlüberComp Lube Technology – Gear oils meeting the highest requirements

## Application

Klübersynth GEM 4 N was specially developed for the lubrication of spur, bevel, hypoid and planetary gears that are subject to high loads. Such gears are frequently used in the wind, steel, mining and sugar industries. It is also used for the lubrication of standard worm gears as defined in DIN 3996.

Klübersynth GEM 4 N can also be used for the lubrication of plain and rolling bearings, all kinds of toothed couplings, chains, guideways, joints, spindles and pumps, especially in applications where the equipment is exposed to elevated temperatures or pronounced temperature fluctuations.

# Klübersynth GEM 4 N

Synthetic high-performance gear and multipurpose oil  
with KlüberComp Lube Technology

## Application notes

Klübersynth GEM 4 N can be applied by means of immersion, immersion circulation or injection.

The use of drip-feed oilers, brushes, oil cans or suitable automatic lubricating systems is also possible. When using automatic lubricating systems, please note the manufacturer's instructions regarding the maximum permissible viscosity. The low-viscosity varieties are also used for oil mist lubrication.

Klübersynth GEM 4 N is miscible with mineral oils. However, for the Klübersynth GEM 4 N oil to deliver its full performance, any residues of a previously used mineral oil should not exceed 5 % in quantity.

For use at permanent temperatures of 80 °C max., seals made of NBR may be used. For higher temperatures, seals made of FKM should be chosen. It should be noted that elastomers from one or several manufacturers can behave differently; therefore tests should be performed.

For checking the contact pattern during running-in, the inspection paint Klübertop P 39-362 Spray (Art. No. 081295) can be used.

## Viscosity selection

When determining the oil viscosity for gear lubrication, the gear manufacturer's instructions take priority. Only for applications where manufacturer's instructions are not available, the suitable viscosity can be determined as laid down in the worksheet "Hints for Practice - selection of oil viscosity for gears". To determine the correct oil viscosity for bearings, please observe the bearing manufacturer's instructions.


Due to the better viscosity-temperature behaviour of Klübersynth GEM 4 compared to mineral oils, the actual viscosity of Klübersynth GEM 4 N during operation differs and can be determined by means of the enclosed diagram.

## Material safety data sheets

Material safety data sheets can be requested via our website [www.klueber.com](http://www.klueber.com). You may also obtain them through your contact person at Klüber Lubrication.



## Viscosity-temperature diagram

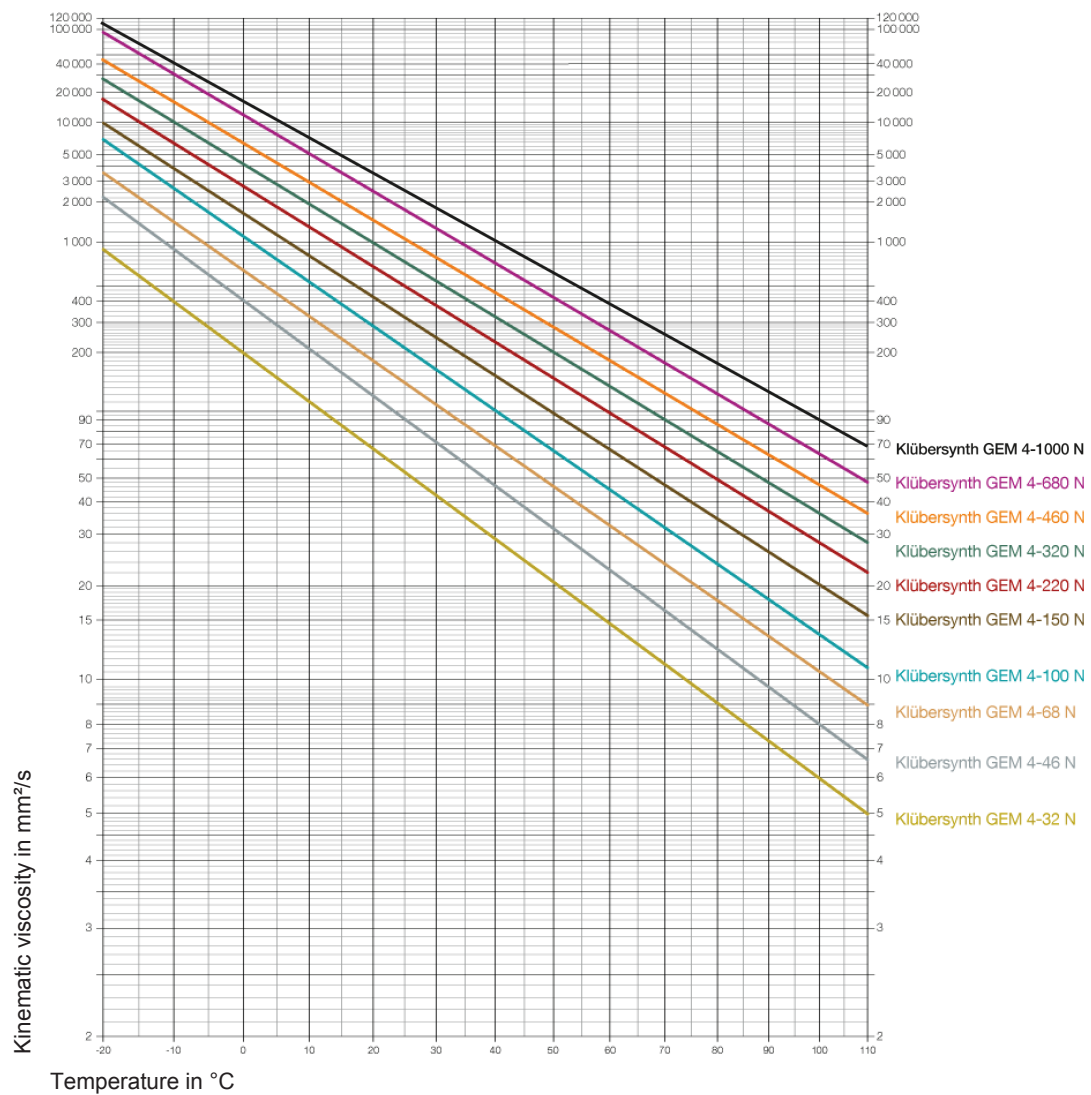

# Klübersynth GEM 4 N

Synthetic high-performance gear and multipurpose oil  
with KlüberComp Lube Technology

Pack sizes	Klübersynth GEM 4- 32 N	Klübersynth GEM 4- 46 N	Klübersynth GEM 4- 68 N
Canister 20 l	+	+	+
Drum 200 l	+	+	+

Product data	Klübersynth GEM 4- 32 N	Klübersynth GEM 4- 46 N	Klübersynth GEM 4- 68 N
Article number	012229	012230	012231
Marking acc. to DIN 51502	CLP HC 32	CLP HC 46	CLP HC 68
Classification acc. to ISO 12925-1	CKC 32	CKC 46	CKC 68
Lower service temperature	-50 °C / -58 °F	-40 °C / -40 °F	-40 °C / -40 °F
Upper service temperature	140 °C / 284 °F	140 °C / 284 °F	140 °C / 284 °F
Density, based on DIN 51757) at 15 °C	840 kg/m <sup>3</sup>	approx. 840 kg/m <sup>3</sup>	850 kg/m <sup>3</sup>
Foam test, ASTM-D 892, ISO 6247, sequence I/24 °C	<= 100/10 ml	<= 100/10 ml	<= 100/10 ml
Foam test, ASTM-D 892, ISO 6247, sequence II/ 93.5 °C	<= 100/10 ml	<= 100/10 ml	<= 100/10 ml
Foam test, ASTM D 892, ISO 6247, sequence III/24°C	<= 100/10 ml	<= 100/10 ml	<= 100/10 ml
Flash point, DIN EN ISO 2592, Cleveland, open-cup apparatus	>= 200 °C	>= 200 °C	>= 200 °C
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 40 °C	approx. 32 mm <sup>2</sup> /s	approx. 46 mm <sup>2</sup> /s	approx. 68 mm <sup>2</sup> /s
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 100 °C	approx. 6 mm <sup>2</sup> /s	approx. 8 mm <sup>2</sup> /s	approx. 11 mm <sup>2</sup> /s
ISO viscosity grade, DIN ISO 3448	32	46	68
Viscosity index, DIN ISO 2909	>= 135	>= 140	>= 140
Copper corrosion, DIN EN ISO 2160, 3 h/100 °C	1 - 100 corrosion degree	1 - 100 corrosion degree	1 - 100 corrosion degree
Anticorrosive properties on steel, DIN ISO 7120, method A, steel, 24 h/60 °C	no rust corrosion degree	no rust corrosion degree	no rust corrosion degree
Pour point, DIN ISO 3016	<= -50 °C	<= -40 °C	<= -40 °C
Ageing properties, ASTM D 2893, increase in viscosity	<= 6 %	<= 6 %	<= 6 %
FZG scuffing test, DIN ISO 14635-1, A/8.3/90, scuffing load stage	>= 14	>= 14	>= 14
FZG scuffing test, based on DIN ISO 14635-1, A/16.6/90, scuffing load stage	>= 12	>= 12	>= 12
FAG FE8 rolling bearing test, DIN 51819-3, D 7,5/80-80, wear of rolling element	<= 30 mg	<= 30 mg	<= 30 mg
FAG FE8 rolling bearing test, DIN 51819-3, D 7,5/80-80, wear of cage	<= 200 mg	<= 200 mg	<= 200 mg
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	24 months	24 months	24 months





## Klübersynth GEM 4 N

Synthetic high-performance gear and multipurpose oil  
with KlüberComp Lube Technology



---

### Klüber Lubrication – your global specialist

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

**Klüber Lubrication München SE & Co. KG /  
Geisenhausenerstraße 7 / 81379 München / Germany /  
phone +49 89 7876-0 / fax +49 89 7876-333.**

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.



a company of the Freudenberg Group