


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3715: REMOVE "UL TYPE CM", NEW FORMAT	11/18/08	D.FRISIELLO
F	ECN 3835: ADDED .5 M LENGTH AND NEW FORMAT	2/10/09	D.FRISIELLO
G	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED FORMAT & PACKAGING	12/8/11	D.FRISIELLO
H	ECN 6451: UPDATED LOGOS, NOTES, AND EXPOSED CONN. DIM.	10/10/12	D. DESJARDIN

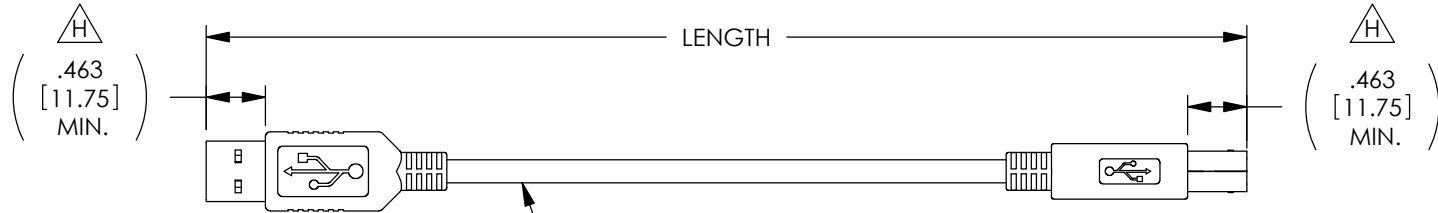


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAID SHIELD.
LSZH OUTER JACKET, BLACK

PIN 1
DIELECTRIC AREA
"P1"
SERIES "A" USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING



PIN 1
"P2"
SERIES "B" USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

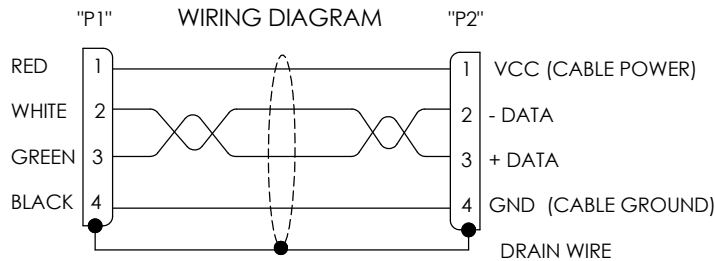

MODEL NUMBER	LENGTH METERS [FEET]
CSUZAB-03M	0.3 [.98]
CSUZAB-05M	0.5 [1.64]
CSUZAB-075M	0.75 [2.46]
CSUZAB-1M	1.0 [3.28]
CSUZAB-2M	2.0 [6.56]
CSUZAB-3M	3.0 [9.84]
CSUZAB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY C.MCCORMICK	11/24/2003		
	CHECKED BY D.PARHAM	11/24/2003		
	APPROVED BY B.MAZEJKA	11/24/2003		
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY USB	
			PRODUCT DESCRIPTION CABLE, USB TYPE A/B, LSZH	
			SIZE A	FSCM NO. 43321
			DWG. NO. CSUZAB	REV. H
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: CSUZAB.SLDDRW	SHEET 1 OF 1