



Data sheet for three-phase Squirrel-Cage-Motors
Totally Enclosed Fan Cooled (TEFC)

MLFB-Ordering data: 1LE2321-2AB11-4AA3

Motor type: SD100 - NEMA Premium Efficiency

Client order no.:
Order no.:
Offer no.:
Remarks:

Item no.:
Consignment no.:
Project:

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					LRC	Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque	T _A /T _N	T _k /T _N
						4/4	3/4	1/2	0	4/4		3/4	1/2	4/4	3/4	1/2	[lb-ft]	LRT [%]	BDT [%]	
460	Y	60	7.50	5.50	1,765	9.70	7.90	6.40	5.00	63.0	91.7	91.7	90.7	78.9	72.3	60.5	22.0	273	455	
230	YY	60	7.50	5.50	1,765	19.40	15.89	12.80	10.00	126.0	91.7	91.7	90.7	78.9	72.3	60.5	22.0	273	455	

Frame Type 213T	Type of constr.: (A) Foot mounted - End shield	Ins. Cl.: F	Motor Prot.: (A) Without Protection	NEMA Des.: B	S.F.: 1.15
Mtr WT: 175 lbs	Mounting: (3) F-1, Standard Floor Mount, T. Box LHS	Temp. Rise Cl.: B	Amb. Temp.: +40 to -20 °C @1000 m	kVA: H	IP55

Mechanical data

WK2		
Rotor Moment of Inertia:	1	Lb-ft ²
Ext Load Inertia Capability:	39.0	Lb-ft ²
Safe Stall Time		
Hot:	25.0	s
Cold:	42.0	s

Typical Noise Data		
A-weighted Sound		
Sound Pressure:	69.0	dB(A)
Sound Power:	57.0	dB(A)

Octave Band Center Frequencies Hertz							
	250	500	1000	2000	4000	8000	Hz
SPL@3 feet	37.0	44.0	54.0	53.0	44.0	35.0	dB(A)

Bearings		
	DE	NDE
Bearing size:	6208 Z C3 S0	6208 Z C3 S0
Bearing Type:	Ball Bearing	Ball Bearing
AFBMA:	40BC02JP30	40BC02JP30

Grease		
Capacity:	0.30	oz
Type:	Exxon Mobile EM	
Thickener:	Polyurea	

Frame	
Frame material:	cast iron
Coating (paint finish):	Standard Paint
Color, paint shade:	RAL 7030

Terminal box	
Terminal box position:	(3) F-1, Standard Floor Mount, T. Box LHS


Lead Wire Connection					
Description:		9 LEAD - WYE			
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Ventilation Type	
Type of Cooling:	TEFC
Fan Material:	Polypropylen ESD
Fan Rotation:	Bidirectional


Additional information			
VFD Operation:	CT:	20:1	VT: 20:1
Area: classification:	Class I Division 2 Gr. A, B, C or D		

Notes

I_L/I_N = locked rotor current / current nominal T_k/T_N = break down torque / nominal torque
 T_A/T_N = locked rotor torque / torque nominal ¹⁾ Value is valid only for DOL operation with motor design IC411

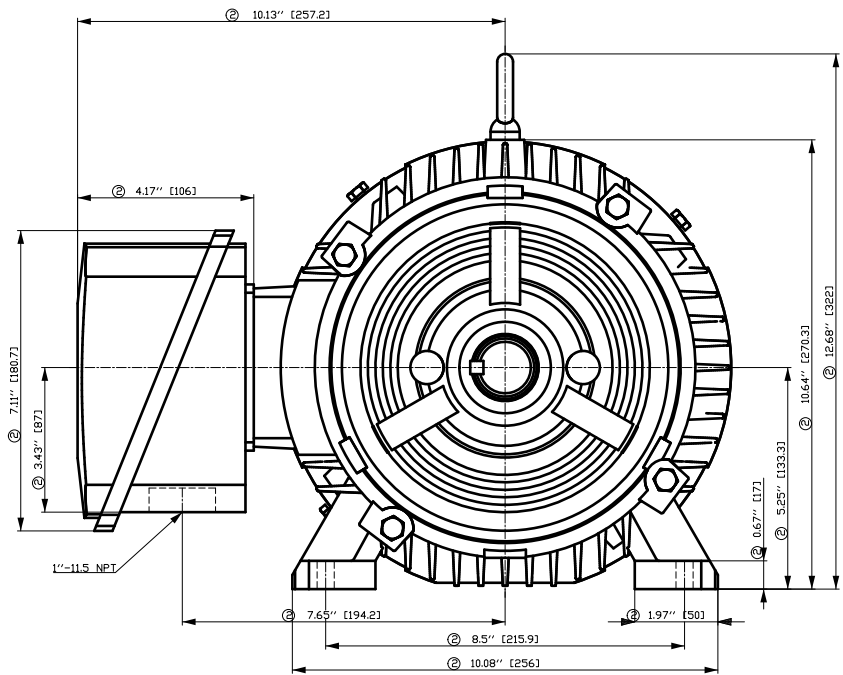

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.

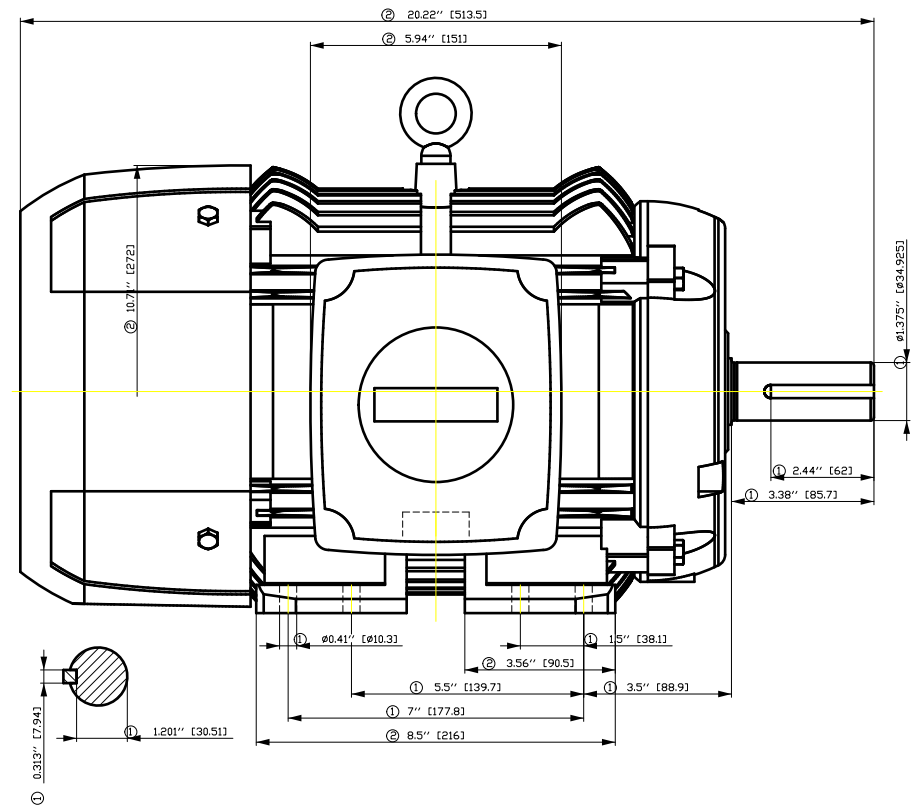


Tolerance	Surface	Material	Weight	Scale
1LE2321-2AB11-4AA3	Author	Dimensional drawing Maßezeichnung		
-	Creator			
	Approval			
	Department			
	Change Order	MLFB	Doc Type	
SIEMENS	Doc. State	9/17/20	Item No	Paper Size A3
	Revision	Index RS	Doc No	1st Language en
				2nd Language de
	Project No	-	Ref No	Sheet 1 of 1
© Siemens AG 2018				

SIEMENS INDUSTRY, INC.

HP 7.5 VOLTS < 600V RPM 1800 TYPE SD100
HZ 60 PHASE 3 FRAME 213T NEMA B

TORQUE & CURRENT VS. SPEED

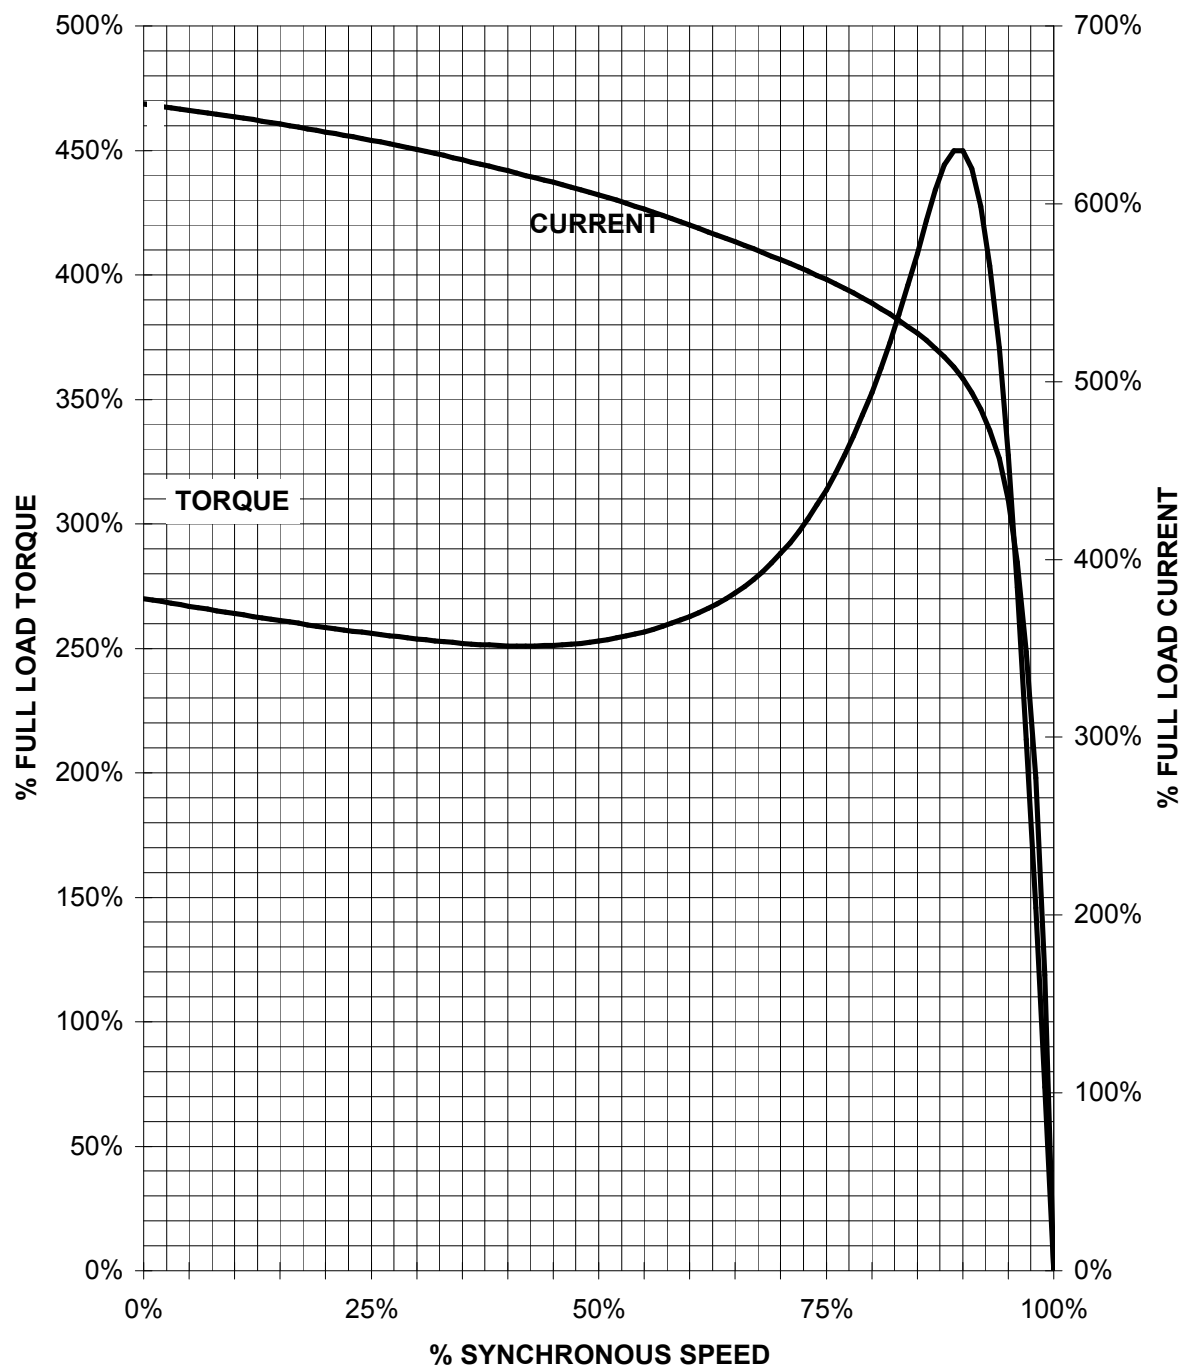


CUSTOMER: _____ ORDER#: _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.
REV. 1

7.5 HP 1800 RPM 213T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
SD100

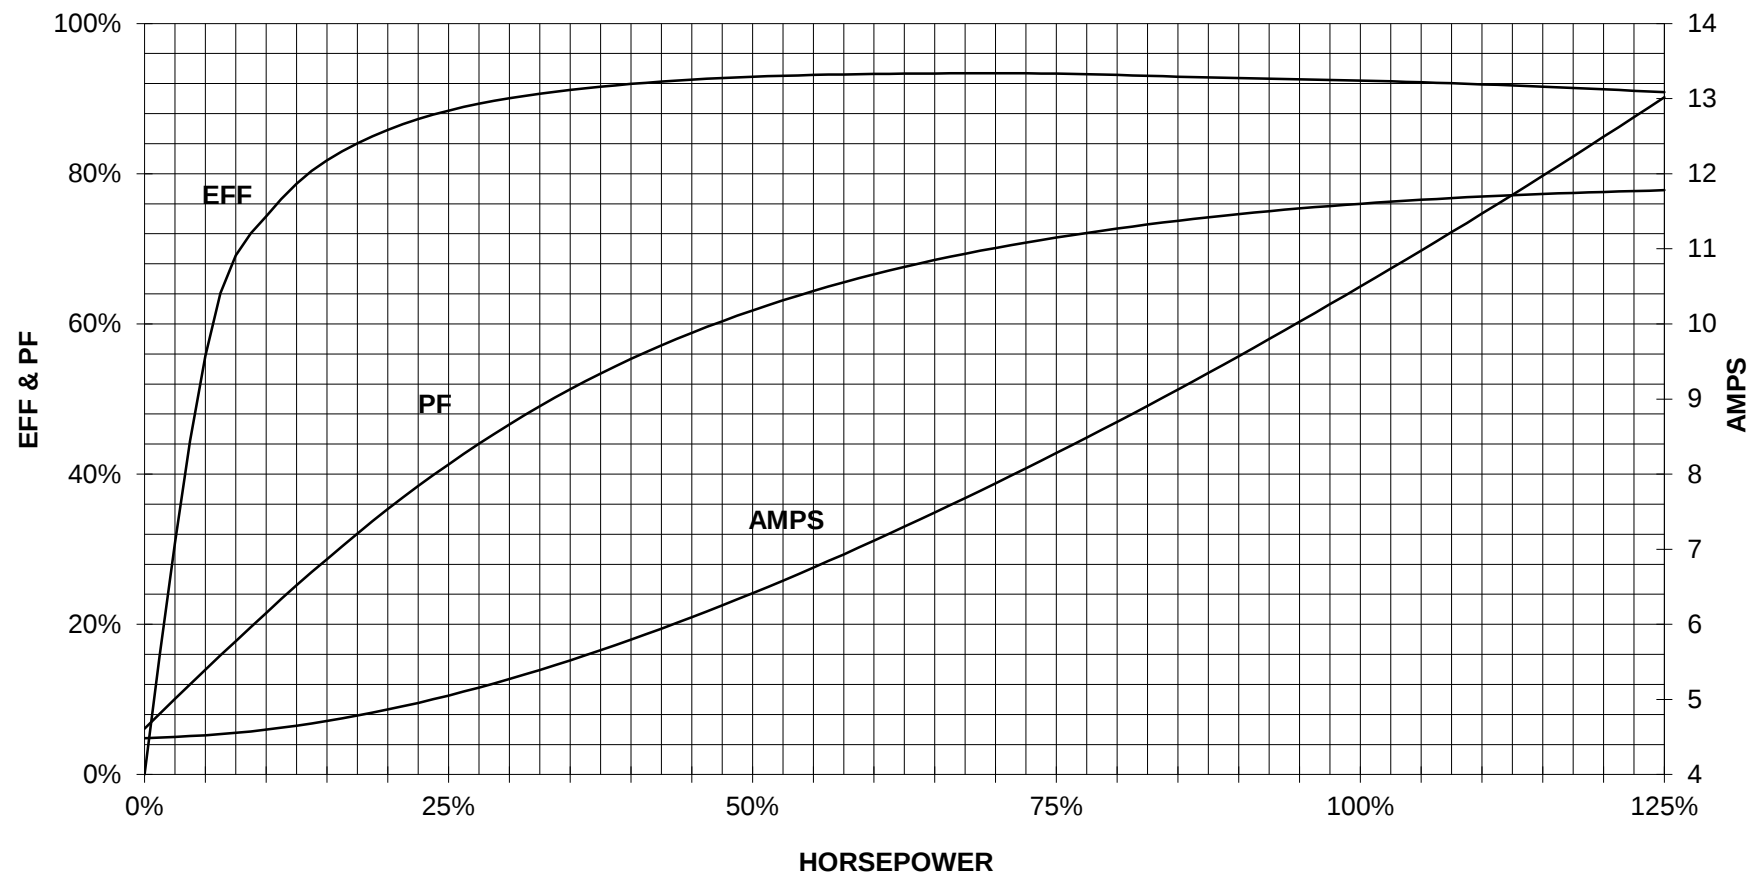


CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 1

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	Y Y	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep.
DI MC LVM

technical reference

created by

approved by

project

SIEMENS

document type
Wiring Diagram

title
1LE2321-2AB11-4AA3

document status
free

document number

customer