



# ISO-TP Low Voltage Male/Female Insulators – ISOTP30F8M8 (542030)



- Halogen free
- High resistance to leakage current
- Great stability of electrical and mechanical parameters
- Fiberglass reinforced
- UL® Recognized in E125470 and evaluated for dielectric withstand rating of 1,500 VAC/DC
- RoHS compliant

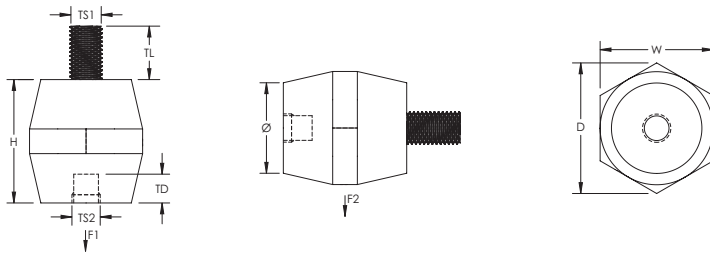

Part Number	ISOTP30F8M8
Article Number	542030
Material	Steel Glass Fibre Reinforced Polyamide
Finish	Electrogalvanized
Working Temperature	-40 to 266 °F
Insulation Voltage	1,000 VAC 1,500 VDC
Flammability Rating	UL® 94V-0
Complies With	IEC® 60695-2-11 (Glow Wire Test 960 °C)
Height (H)	1.181"
Hex Width (W)	30 mm
Depth (D)	1.338"
Diameter (Ø)	1.024"
Thread Size 1 (TS1)	M8
Thread Length (TL)	0.67"
Thread Size 2 (TS2)	M8
Thread Depth (TD)	0.31"
Static Load 1 (F1)	1,349 lb
Static Load 2 (F2)	674 lb
Unit Weight	0.110 lb
Certifications	CSA-Comp cURus RoHS

Part Number	ISOTP30F8M8
Standard Packaging Quantity	25 pc
UPC	78285687515
EAN-13	3479775420301

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

**WARNING**

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.