

**T-COUPLER SLIMLINE M12 MALE / 2X M8 FEMALE**

T-coupler (Slim Line)


Male straight – females straight

M12 – M8, 4-pole


Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

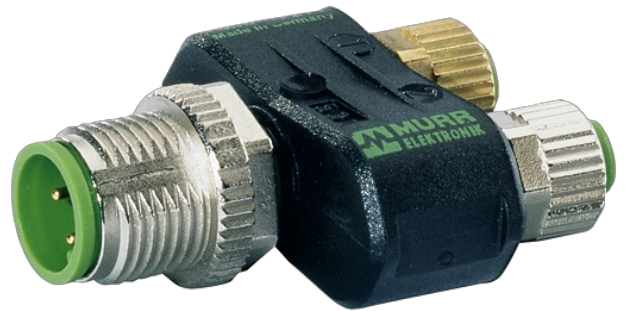[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals****Form**

Form 41211

**General data**

Temperature range -25...+85 °C

**Technical Data**

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing

Protection IP65 and IP67 when plugged and screwed down (EN 60529)

Rated surge voltage 1.5 kV

**Commercial data**

country of origin DE




customs tariff number 85366990

EAN 4048879144773

eClass 27143423

Packaging unit 1

**Sketch**

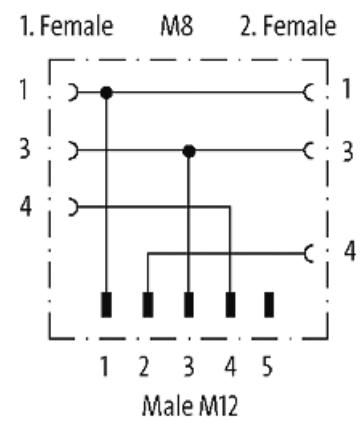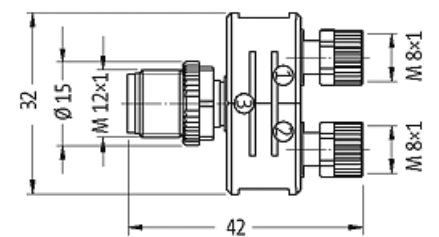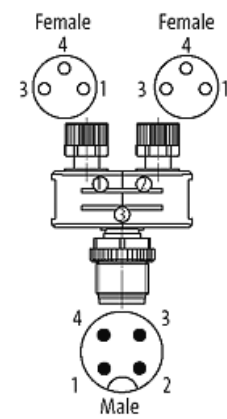

Product may differ from Image