

# STXP Series

Surge-Trap®

## SURGE PROTECTIVE DEVICE

### NEMA DEVICES FOR ANSI/UL 1449 TYPE 1 AND 2 APPLICATIONS



The Surge-Trap® Type 1 STXP Series offers advanced performance and features over the STXR series including higher surge capacity and phase LED status indicators. The STXP meets requirements for UL1449 4th Edition and has been designed for additional mounting flexibility including mounting feet and flush-mount capability. The STXP features TPMOV® technology inside making it the safest product available. Installation can be done on the line or load side of a panel. The STXP is the perfect fit from service entrance all the way down to an important machine specific control panel.

#### FEATURES AND BENEFITS:

- Designed with the industry-leading Mersen TPMOV® Technology (internally fused)
- Enhanced 100kA surge capacity for longer life and higher single impulse withstand
- Pre-wired with 3' leads for easy installation
- Up to 10 Modes of Protection (L-N, L-L, L-G, N-G)
- 10-year warranty



#### RATINGS:

- **Volts ( $U_n$ ):** 120-600VAC
- **Nominal Discharge Current Rating ( $I_n$ ):** 20kA
- **Surge Capacity (per phase):** 100kA
- **Short-Circuit Current Rating (SCCR):** 200kA

#### APPROVALS:

- ANSI/UL 1449 4th Edition, Type 1 SPD, File E210793
- CSA C22.2, Type 1 SPD
- ANSI/IEEE C62.41.1, C62.41.2, C62.45
- UL96A Lightning Protection
- RoHS Compliant

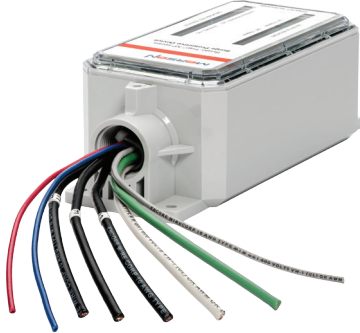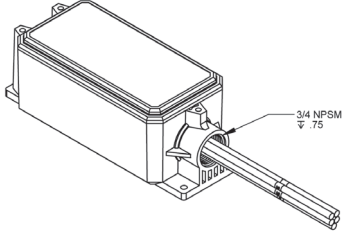

General Product Specifications										
Mounting:	Female 3/4" – 14 threaded hub Mounting feet with 0.125" diameter holes			Operating & Storage Temperature: -40°C to +85°C		Relative Humidity Range: 0 to 95%				
Wiring:	Pre-wired 3' (1m) 10AWG			Visual End-of-Life Indicator:		non-condensing				
Enclosure:	NEMA 4X Non-metallic			Frequency:		GREEN = OK, OUT = REPLACE				
Flammability:	UL94-5VA					50-60Hz				
Catalog Number (includes suffixes*)	System Voltage and Configuration	I <sub>n</sub>	Maximum Continuous Operating Voltage (MCOV, U <sub>c</sub> )				Voltage Protection Rating (VPR) (UL 1449, 6kV, 3kA)			
			L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
STXP120P10	120V Single Phase	20kA	150	150	-	150	700	700	-	600
STXP240P10	240V Single Phase	20kA	320	320	-	150	1200	1200	-	700
STXP240S10	240/120V Split Phase	20kA	150	150	300	150	700	700	1000	600
STXP480S10	480/240V Split Phase	20kA	320	320	640	150	1200	1200	2000	600
STXP208Y10	208/120V 3-Phase WYE	20kA	150	150	300	150	700	700	1000	600
STXP380Y10	380/220V 3-Phase WYE	20kA	320	320	640	150	1200	1200	2000	600
STXP480Y10	480/277V 3-Phase WYE	20kA	320	320	640	150	1200	1200	2000	600
STXP600Y10	600/347V 3-Phase WYE	20kA	420	420	840	275	1200	1500	2000	1000
STXP240D10	240V 3-Phase DELTA	20kA	-	320	640	-	-	1200	2000	-
STXP480D10	480V 3-Phase DELTA & HRG WYE	20kA	-	550	1100	-	-	1800	3000	-
STXP600D05 (50kA)	600V 3-Phase DELTA	20kA	-	690	695	-	-	2000	2500	-
STXP480B10	480V B Corner Ground DELTA	20kA	-	550	1100	-	-	1800	3000	-
			L-N/ HL-N	L-G/HL-G	L-L/HL-L	N-G	L-N/ HL-N	L-G/HL-G	L-L/HL-L	N-G
STXP240H10	240/120V Hi-Leg DELTA	20kA	150/275	150/275	300/425	150	700/1.2k	700/1.2k	1.0k/2000	600
STXP480H10	480/240V Hi-Leg DELTA	20kA	320/550	320/550	640/870	320	1.2k/1.8k	1.2k/1.8k	1.8k/2.5k	1000
Suffixes:	Add Suffix "A" for Audible Alarm and Dry Contact. Example: STXP208Y10A									
	Add Suffix "L" for Long Leads (9 ft.)									
Catalog No.	Accessory Description									
STXPFMK	STXP Flush Mount Kit. Includes (1) mounting plate and (3) mounting screws						3/4"-14 Female Mounting Hub			
Optional Form C Dry Contact and Audible Alarm (Suffix "A")										
<b>Form C Dry Contact (Pre-wired 3' 18AWG)</b> 125VAC, 1A Resistive 30VDC, 2A General Purpose  Red = Normally Closed Gray = Common Blue = Normally Open										
<b>Audible Alarm</b> Alarm sounds when any protection is lost										
<b>Dimensions and Mounting Configurations</b>						<b>Flush Mount Option</b>				
