

ENGLISH


Datasheet

DP Button Microswitch, 0.1 A@ 110 V dc, 0.6 A@ 110 V dc, 16 A@ 250 V ac

RS Stock 804-6247



Dimensions: (mm)

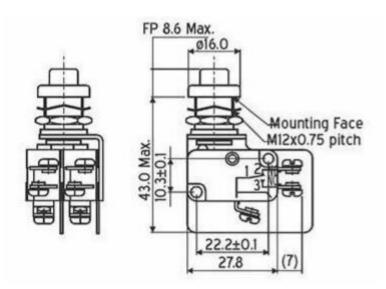



ENGLISH

Characteristics Versatile switch suitable for many heavy duty applications.

- Double Pole change over.
- Available with solder, quick connect and screw terminals.
- Long mechanical and electrical life.
- Fine silver contacts.
- Temperature range upto 85°C.
- Positive snap action.

CE

- Push buttons are available in Red, Green, Yellow, Blue, Black & White colours. State colour while ordering.
- Conform to IEC 1058-1 standard.

Circuit facilities	Double pole changeover
Actuating force	800 gms. (max.)
Release force	160 gms. (min.)
Centre distance	
between two ac	ljacent
units	29.0 mm. (min.)
Cut-out size	Ø12.5 mm.
AC	16 Amp at 250V 5 Amp at 440V
DC (resistive)	0.6 Amp at 110V
DC (resistive)	0.3 Amp at 220V
DC (inductive)	0.1 Amp at 110V
	0.05 Amp at 220V

Approval

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.