Bracket 45/90




- Brackets with centering lugs for rapid, precise assembly with protection against turning
- Centering lugs can be easily broken off for assembly on plates or at right angles to the slot
- Version *designLINE* with special silver paint (RAL 9006) for an especially high-quality design
- Cover cap to protect from dirt, available in signal gray (RAL 7004) and black ESD (RAL 9005)
- Profile finishing: not required





Product description

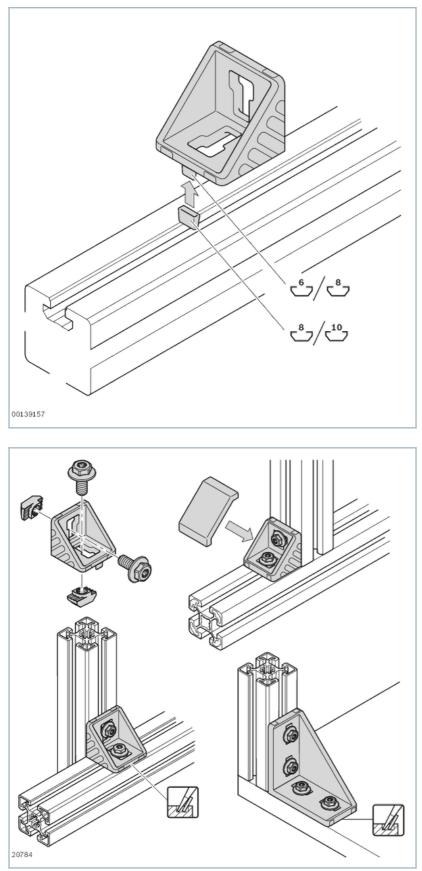

Connection elements, selection criteria

Technical data

	Groove	ES D		Fmax	Mmax	M _{max}
				F _{max}	M _{max}	M _{max}
				Ν	Nm	Nm
Bracket	10	٨	Bracket: Diecast aluminum, vibratory ground Fastening material: Steel, galvanized	6000	180	400
	10	٨	Bracket <i>designLINE</i> : Diecast aluminum; vibratory ground, painted (RAL 9006) Fastening material: Steel, galvanized	6000	180	400
	10		Bracket: Diecast aluminum, vibratory ground	6000	180	400
Cover cap for bracket			PP			
			РР			




Тур	Fmax	Mmax	M _{max}	Mmax
45 / 90	6000 N	180 Nm	400 Nm	60 Nm

Assembly-Technology, PDF version, 2022-07-194, © Bosch Rexroth AG, subject to change. Valid edition only on the Internet. Copies of any type are not subject to change.

Dimensions


Bracket 45/90 with cover cap

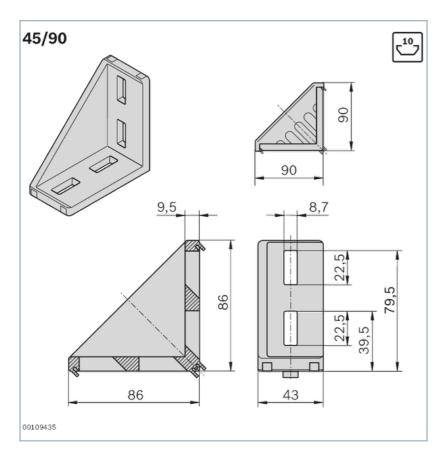

Accessories

Recommended accessories Cover cap for bracket 45/90, signal gray Cover cap for bracket 45/90, black

Delivery notes

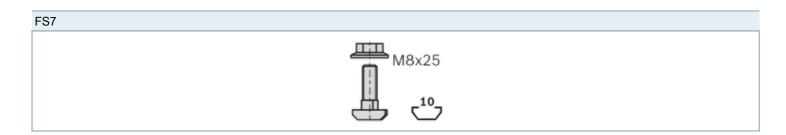

Ordering codes

	Groove	U	ESD	FS	No.
Bracket 45x90 set (standard)	10			4xFS7	3842523570
Bracket 45x90 set design <i>LINE</i>	10			4xFS7	3842551607
Bracket (standard) 45x90	10	100			3842523567
Cover cap for bracket 45/90, signal gray		20			3842548864
Cover cap for bracket 45/90, black		20			3842548865